

Panasonic

POWER TOOLS FOR PROFESSIONALS




PRODUCT RANGE

VALID FROM SPRING 2020

Panasonic Cordless Power Tool History

We have continuously challenged to innovate a wide range of unique technologies and advanced products for professionals.

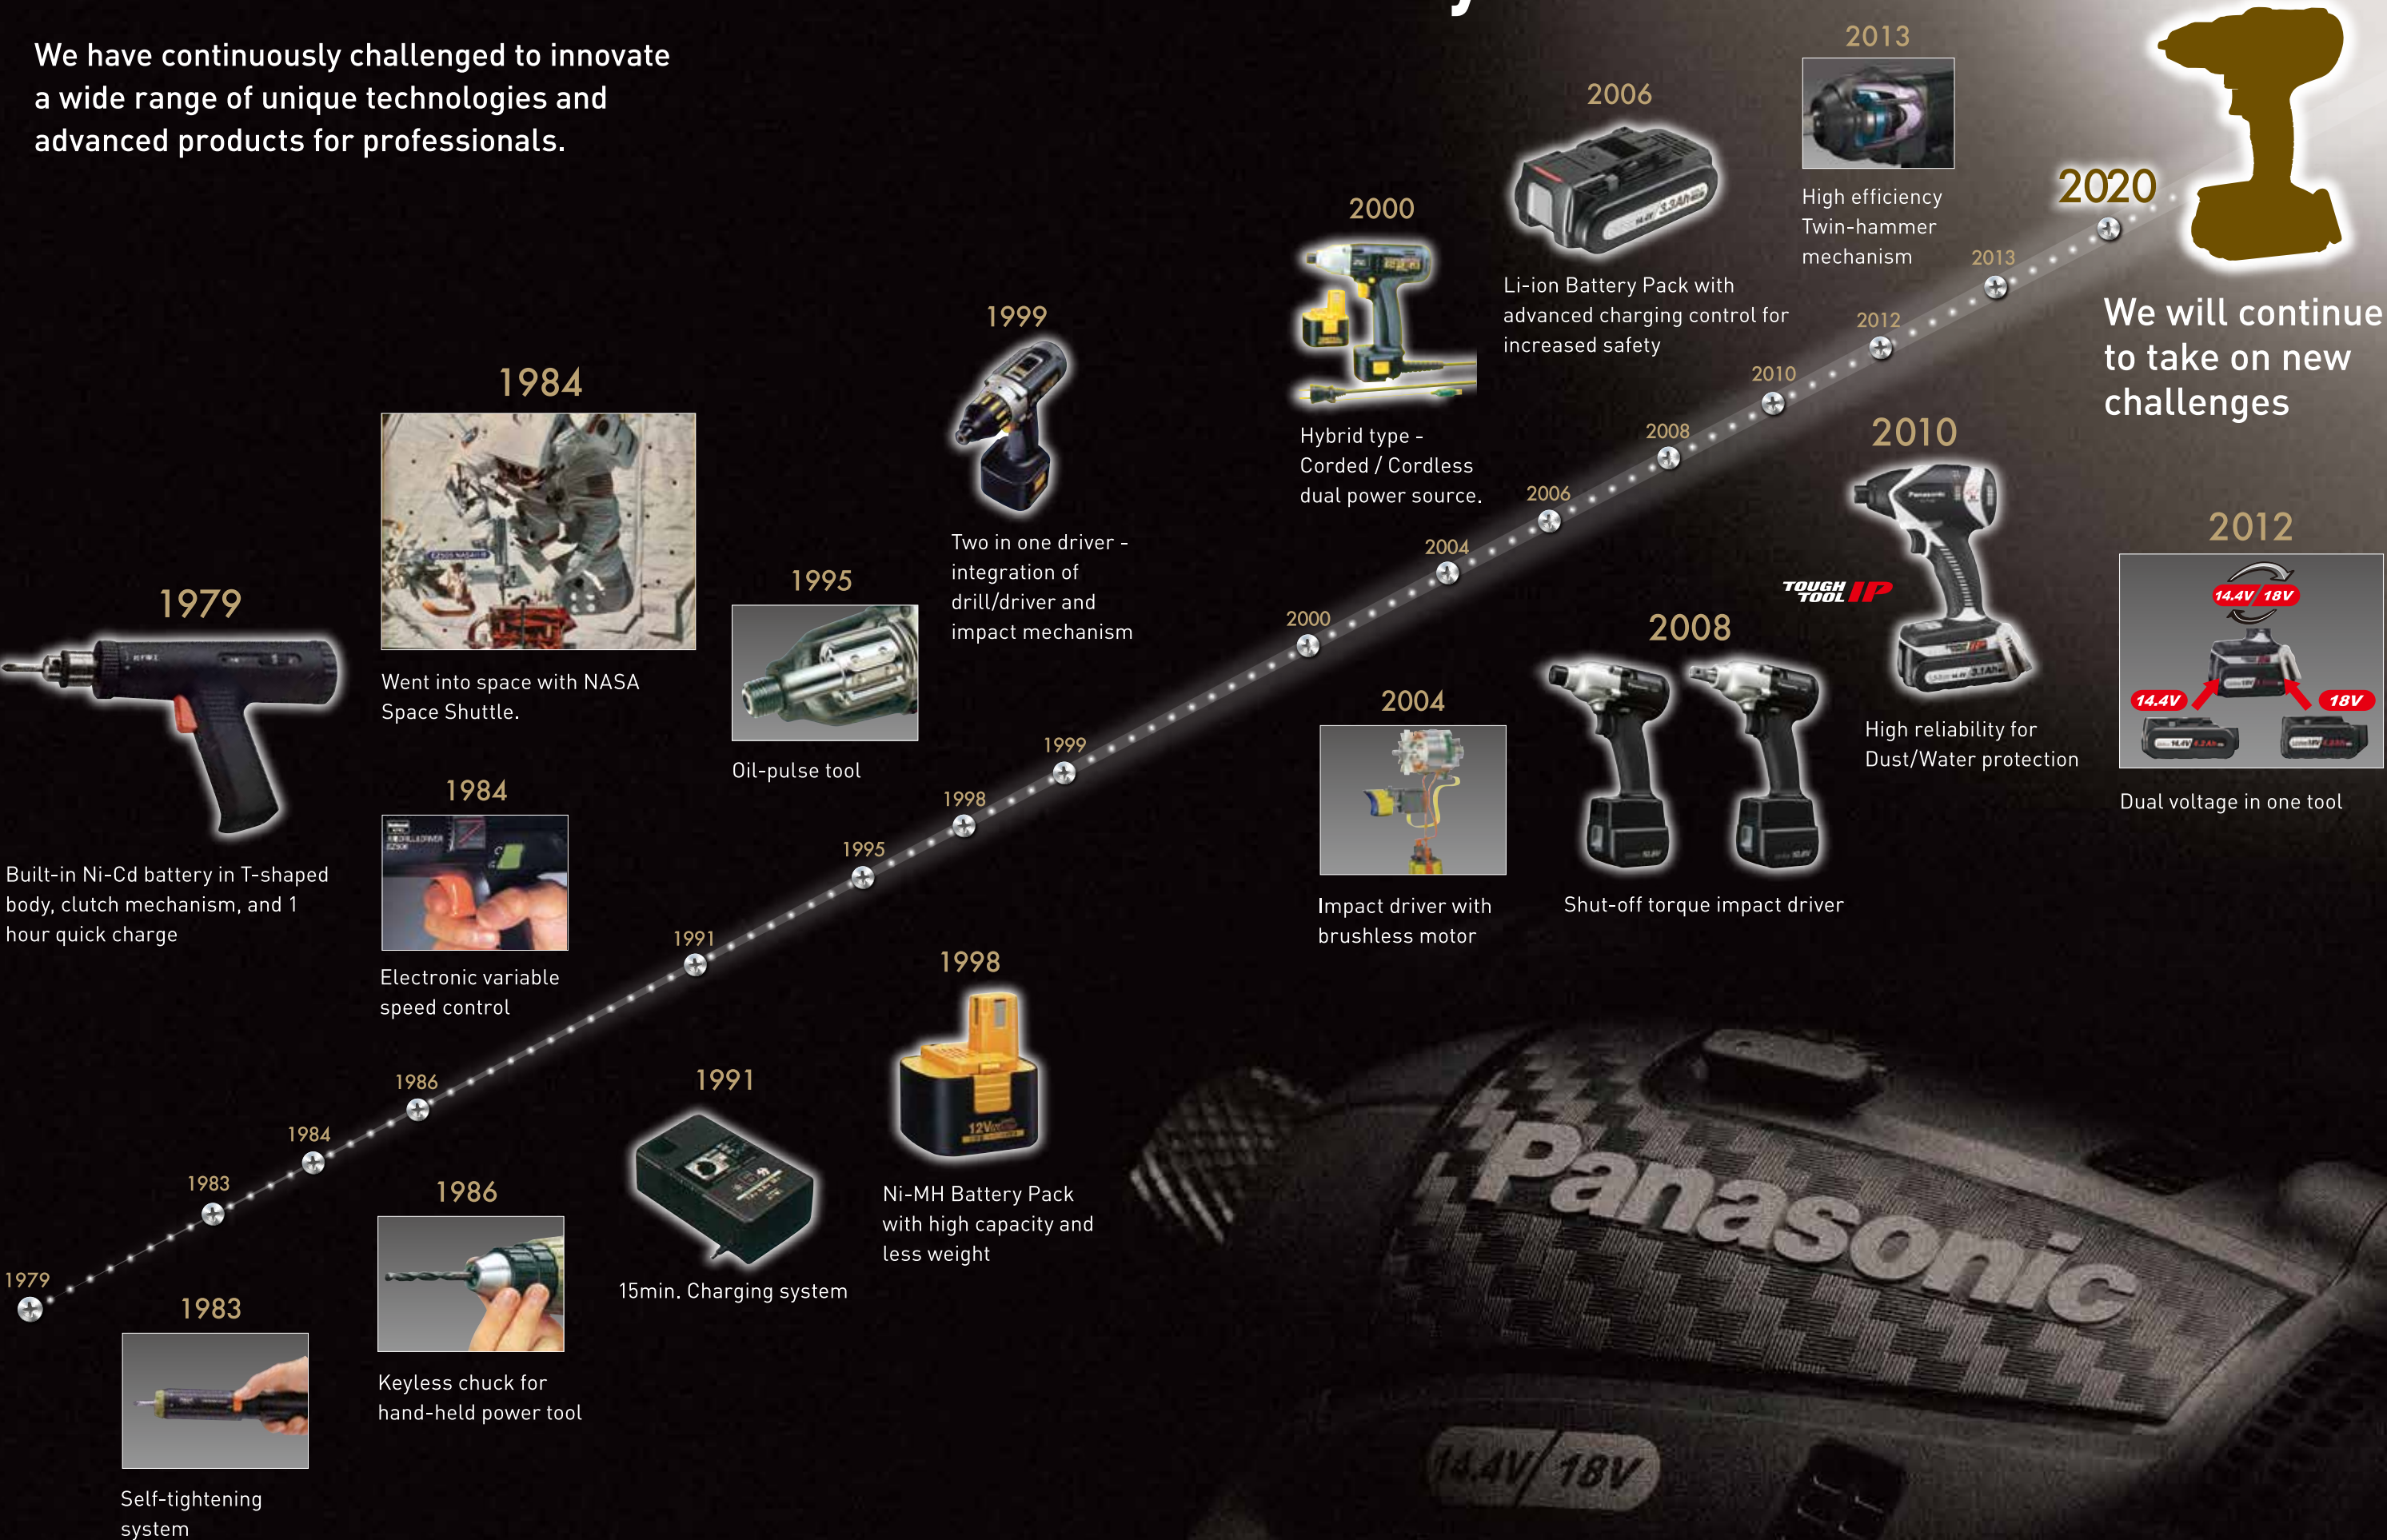

New 2020 Models

Next generation intelligent control technology

Smart BL

The new leading-edge micro-controller delivers optimal brushless motor output.

This allows maximised tool performance, delivering the power and speed to suit your task.

High-efficiency microcontroller



Brushless motor



New Brushless Drill/Driver EY74A3

Drill holes easily with grip torque control!

Increase torque to give grip when drilling, ensuring good progress under heavy load



Drill vertically into boards




Drill into metal (High mode)



Drill into wood (High mode)

Rotation speed and torque are optimised to speed up jobs!

The drill adjusts automatically between a fast rotation speed for lighter work and higher torque whenever the load increases. This ensures correct torque and rotation speed for any task.

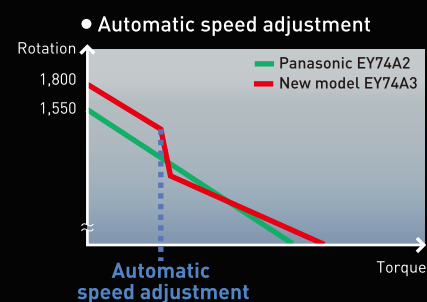

New Brushless Impact Driver EY76A1

More powerful continuous work!

Smart BL and the new air flow design combine to give dramatically improved continuous durability under heavy load, such as when driving long screws or drilling into wood using a flute woodboring bit.



Convenience and speed!


The improved torque and motor speed in a more compact, lighter body are fully utilised in the new Smart BL mode. This greatly reduces the time spent driving long screws or drilling into wood with a flute woodboring bit.



Flute woodboring bit

Makes continuous work quick and easy! Now with Dash mode.

To help increasing work speed, the EY76A1 features a new 'DASH' mode. It allows the unit to reach full speed instantaneously giving maximum performance, ideal for drilling wood without needing pilot holes or super fast driving without damaging screw heads.

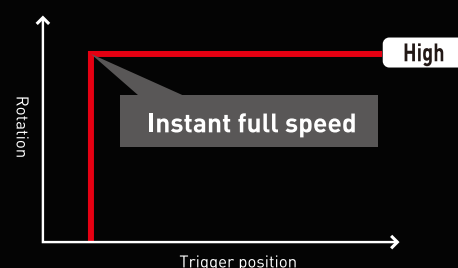

New Brushless Multitool EY46A5

Powerful, compact and extremely versatile.



Versatile accessory options mean that OIS or Starlock blades can be fitted.

Universal blade fitting

Mount can accept both OIS and Starlock blade types.



Blade can be fitted in a range of directions

Angle can be set to increments of 30 degrees, to suit the job.



Built-in LED worklight

The twin LED light feature will ensure you get a good view of your working area no matter how secluded.



Speed adjustment dial

The oscillation rate can be selected



Lock-On switch

Allows you to use both hands for the job or to switch hands as required.

New LED Flashlight EY37C4

Compact and bright: 750 lumens.



For tight spaces such as lofts and cellars



For work or maintenance in dark areas



For loading or unloading a vehicle

New Bluetooth Speaker EY37C5

Compact, clear and strong audio playback.

Passive radiator to increase fullness of bass



Full range cone speaker



Easy to hang when listening to music at work

Note: Image shows speaker cover removed. The cover should not be removed.

Wireless simplicity and powerful playback

- Simple Bluetooth® wireless connection
- 5W output gives a clear and strong sound
- Volume can be adjusted either via your smartphone or on the unit



2 x USB recharging sockets
Recharge available during LED/speaker is on.



Support for many usage environments
Direction can be rotated to suit.




Handle for easy transport




Hangs on the hook provided





DRILL & DRIVER

VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
21,6 V		<div>EY 7460 X / XT / LS2G</div> <ul style="list-style-type: none">■ Light weight 2.45kg (incl. battery)■ 13mm high-capacity drill chuck (keyless)■ Electric speed control■ Electric brake■ Reversible■ Compact body and LED light	<table><tr><td>Voltage</td><td>21.6V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>4.2Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 85min.</td></tr><tr><td>Battery</td><td>2 x battery EY 9L62 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.45kg</td></tr><tr><td>Speed at no load (low / high) in min-1 (rpm)</td><td>100–400 / 350–1,500</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>42 / 63Nm</td></tr><tr><td>Clutch stages</td><td>18 + drill position</td></tr></table>	Voltage	21.6V	Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)	Charging time (usable / full)	65 / 85min.	Battery	2 x battery EY 9L62 B	Weight (incl. battery)	2.45kg	Speed at no load (low / high) in min-1 (rpm)	100–400 / 350–1,500	Max. torque (stalling / instant torque)	42 / 63Nm	Clutch stages	18 + drill position
			Voltage	21.6V															
Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)																		
Charging time (usable / full)	65 / 85min.																		
Battery	2 x battery EY 9L62 B																		
Weight (incl. battery)	2.45kg																		
Speed at no load (low / high) in min-1 (rpm)	100–400 / 350–1,500																		
Max. torque (stalling / instant torque)	42 / 63Nm																		
Clutch stages	18 + drill position																		
ITEM NUMBER	DESIGNATION		RRP																
EY7460X	Body only - without batteries and charger		£159.00																
EY7460XT	Body only - without batteries and charger in SYSTAINER		£179.00																
EY7460LS2G	Kit with 2 x 4.2Ah batteries and charger in SYSTAINER		£409.00																


NEW

VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V	 <div>Smart BL BRUSHLESS MOTOR TOUGH TOOL IP™</div>	EY 74A3 X / XT / PN2G / LJ2G <ul style="list-style-type: none">■ New design high power Brushless motor■ New metal tapping function■ 'Smooth Start' electronic speed control■ New hard chuck jaw tips■ Battery capacity indicator and LED light■ Compact body 189mm and fresh new 'Carbon' design	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>3.0 or 5.0Ah (Li-ion)</td></tr><tr><td>Charging time with EY0L82B (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.00kg</td></tr><tr><td>Speed at no load (low / high) in min⁻¹ (rpm)</td><td>20–530 / 70–1,800</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>32 / 50Nm</td></tr><tr><td>Clutch stages</td><td>18 + drill position</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)	Charging time with EY0L82B (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	2.00kg	Speed at no load (low / high) in min ⁻¹ (rpm)	20–530 / 70–1,800	Max. torque (stalling / instant torque)	32 / 50Nm	Clutch stages	18 + drill position
		Voltage	18V																
Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)																		
Charging time with EY0L82B (usable / full)	65 / 80min.																		
Battery	2 x EY 9L54 B																		
Weight (incl. battery)	2.00kg																		
Speed at no load (low / high) in min ⁻¹ (rpm)	20–530 / 70–1,800																		
Max. torque (stalling / instant torque)	32 / 50Nm																		
Clutch stages	18 + drill position																		
ITEM NUMBER	DESIGNATION		RRP																
EY74A3X	Body only - without batteries and charger in the box		£199.00																
EY74A3XT	Body only - without batteries and charger in SYSTAINER		£229.00																
EY74A3PN2G	Kit with 2 batteries 3.0 Ah and charger in SYSTAINER		£379.00																
EY74A3LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£419.00																


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V	 BRUSHLESS MOTOR TOUGH TOOL IP	EY 74A2 X / XT / PN2G / LJ2G <ul style="list-style-type: none">■ Design high power Brushless motor■ ‘Smooth Start’ electronic speed control■ Hard chuck jaw tips■ Battery capacity indicator and LED light■ Compact body 178mm and ‘Carbon’ design	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>3.0 or 5.0Ah (Li-ion)</td></tr><tr><td>Charging time with EY0L82B (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.05kg</td></tr><tr><td>Speed at no load (low / high) in min⁻¹ (rpm)</td><td>20–480 / 70–1,580</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>32 / 50Nm</td></tr><tr><td>Clutch stages</td><td>18 + drill position</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)	Charging time with EY0L82B (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	2.05kg	Speed at no load (low / high) in min ⁻¹ (rpm)	20–480 / 70–1,580	Max. torque (stalling / instant torque)	32 / 50Nm	Clutch stages	18 + drill position
		Voltage	18V																
Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)																		
Charging time with EY0L82B (usable / full)	65 / 80min.																		
Battery	2 x EY 9L54 B																		
Weight (incl. battery)	2.05kg																		
Speed at no load (low / high) in min ⁻¹ (rpm)	20–480 / 70–1,580																		
Max. torque (stalling / instant torque)	32 / 50Nm																		
Clutch stages	18 + drill position																		
ITEM NUMBER	DESIGNATION		RRP																
EY74A2X	Body only - without batteries and charger in the box		£169.00																
EY74A2XT	Body only - without batteries and charger in SYSTAINER		£189.00																
EY74A2PN2G	Kit with 2 batteries 3.0 Ah and charger in SYSTAINER		£349.00																
EY74A2LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£389.00																

VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES															
18 V		EY 7450 X / XT / PN2G / LJ2S															
		<ul style="list-style-type: none">■ Light weight 2.15kg (incl. battery)■ 13mm high-capacity drill chuck (keyless)■ Electric speed control■ Electric brake■ Reversible■ Compact body and LED light	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>3.0 or 5.0Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.15kg</td></tr><tr><td>Speed at no load in rpm (low / high)</td><td>50-430 / 160-1.650</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>40 / 57Nm</td></tr><tr><td>Clutch stages</td><td>18 + drill position</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)	Charging time (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	2.15kg	Speed at no load in rpm (low / high)	50-430 / 160-1.650	Max. torque (stalling / instant torque)	40 / 57Nm
Voltage	18V																
Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)																
Charging time (usable / full)	65 / 80min.																
Battery	2 x EY 9L54 B																
Weight (incl. battery)	2.15kg																
Speed at no load in rpm (low / high)	50-430 / 160-1.650																
Max. torque (stalling / instant torque)	40 / 57Nm																
Clutch stages	18 + drill position																
ITEM NUMBER	DESIGNATION		RRP														
EY7450X	Body only - without batteries and charger in the box		£149.00														
EY7450XT	Body only - without batteries and charger in SYSTAINER		£169.00														
EY7450PN2G	Kit with 2 batteries 3.0 Ah and charger in SYSTAINER		£319.00														
EY7450LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£359.00														


DRILL & DRIVER


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V	<div><div>EY 7451 X / PN2S<ul style="list-style-type: none">■ Light weight 1.6kg (incl. battery)■ 13mm high-capacity drill chuck (keyless)■ Electric speed control■ Electric brake■ Reversible■ Compact body and LED light</div></div>	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>3.0 Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>45 / 60min.</td></tr><tr><td>Battery</td><td>2 x EY 9L53 B</td></tr><tr><td>Weight (incl. battery)</td><td>1.6 kg</td></tr><tr><td>Speed at no load in rpm (low / high)</td><td>70-400 / 200-1,400</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>26 / 42 Nm</td></tr><tr><td>Clutch stages</td><td>18 + drill position</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	3.0 Ah (Li-ion)	Charging time (usable / full)	45 / 60min.	Battery	2 x EY 9L53 B	Weight (incl. battery)	1.6 kg	Speed at no load in rpm (low / high)	70-400 / 200-1,400	Max. torque (stalling / instant torque)	26 / 42 Nm	Clutch stages	18 + drill position	
Voltage	18V																		
Battery capacity accord. to IEC (technology)	3.0 Ah (Li-ion)																		
Charging time (usable / full)	45 / 60min.																		
Battery	2 x EY 9L53 B																		
Weight (incl. battery)	1.6 kg																		
Speed at no load in rpm (low / high)	70-400 / 200-1,400																		
Max. torque (stalling / instant torque)	26 / 42 Nm																		
Clutch stages	18 + drill position																		
ITEM NUMBER	DESIGNATION		RRP																
EY7451X32	Body only - without batteries or charger		£119.00																
EY7451PN2S	Kit with 2 batteries 3.0 Ah and charger in the case		£239.00																

HAMMER DRILL & DRIVER


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																
21,6 V	 TOUGH TOOL IP™	EY 7960 X / XT / LS2G <ul style="list-style-type: none">■ Light weight 2.5kg (incl. battery)■ 13mm high-capacity drill chuck (keyless)■ Powerful percussion mechanism for fast drilling■ 18-stage clutch plus drill position■ Reversible■ Secure front handle■ Powerful percussion mechanism for fast drilling																
		<table><tr><td>Voltage</td><td>21.6V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>4.2Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 85min.</td></tr><tr><td>Battery</td><td>2 x EY 9L62 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.5kg</td></tr><tr><td>Speed at no load (low / high) in min⁻¹ (rpm)</td><td>100–400 / 350–1,500</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>42 / 63Nm</td></tr><tr><td>Percussion mechanism (blows per minute)</td><td>7,200 – 27,000</td></tr></table>	Voltage	21.6V	Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)	Charging time (usable / full)	65 / 85min.	Battery	2 x EY 9L62 B	Weight (incl. battery)	2.5kg	Speed at no load (low / high) in min ⁻¹ (rpm)	100–400 / 350–1,500	Max. torque (stalling / instant torque)	42 / 63Nm	Percussion mechanism (blows per minute)	7,200 – 27,000
Voltage	21.6V																	
Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)																	
Charging time (usable / full)	65 / 85min.																	
Battery	2 x EY 9L62 B																	
Weight (incl. battery)	2.5kg																	
Speed at no load (low / high) in min ⁻¹ (rpm)	100–400 / 350–1,500																	
Max. torque (stalling / instant torque)	42 / 63Nm																	
Percussion mechanism (blows per minute)	7,200 – 27,000																	
ITEM NUMBER	DESIGNATION		RRP															
EY7960X	Body only - without batteries and charger in the box		£169.00															
EY7960XT	Body only - without batteries and charger in SYSTAINER		£189.00															
EY7960LS2G	Kit with 2 batteries 4.2 Ah and charger in SYSTAINER		£419.00															


NEW


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V	 <div>Smart BL BRUSHLESS MOTOR TOUGH TOOL IP</div>	EY 79A3 X / XT / PN2G / LJ2G <ul style="list-style-type: none">■ New design high power Brushless motor■ New metal tapping function■ ‘Smooth Start’ electronic speed control■ Battery capacity indicator and LED light■ Compact body 192mm and fresh new ‘Carbon’ design■ Powerful percussion mechanism for fast drilling	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>3.0 or 5.0Ah (Li-ion)</td></tr><tr><td>Charging time with EY 0L82 B (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.05kg</td></tr><tr><td>Speed at no load (low / high) in min⁻¹ (rpm)</td><td>20-530 / 70-1,800</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>32 / 50Nm</td></tr><tr><td>Percussion mechanism (low / high) blows per minute</td><td>400-9,500 / 1,260-32,300</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)	Charging time with EY 0L82 B (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	2.05kg	Speed at no load (low / high) in min ⁻¹ (rpm)	20-530 / 70-1,800	Max. torque (stalling / instant torque)	32 / 50Nm	Percussion mechanism (low / high) blows per minute	400-9,500 / 1,260-32,300
Voltage	18V																		
Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)																		
Charging time with EY 0L82 B (usable / full)	65 / 80min.																		
Battery	2 x EY 9L54 B																		
Weight (incl. battery)	2.05kg																		
Speed at no load (low / high) in min ⁻¹ (rpm)	20-530 / 70-1,800																		
Max. torque (stalling / instant torque)	32 / 50Nm																		
Percussion mechanism (low / high) blows per minute	400-9,500 / 1,260-32,300																		
ITEM NUMBER	DESIGNATION		RRP																
EY79A3X	Body only - without batteries and charger in the box		£209.00																
EY79A3XT	Body only - without batteries and charger in SYSTAINER		£239.00																
EY79A3PN2G	Kit with 2 batteries 3.0 Ah and charger in SYSTAINER		£389.00																
EY79A3LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£429.00																

VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V		EY 7950 X / XT / LJ2S																	
		<ul style="list-style-type: none">■ Light weight 2.3kg (incl. battery)■ 18-stage clutch plus drill position■ 13mm high-capacity drill chuck (keyless)■ Electric speed control■ Electric brake; reversible■ Secure front handle																	
		<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>5.0Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.3kg</td></tr><tr><td>Speed at no load (low / high) in min⁻¹ (rpm)</td><td>50–430 / 160–1.650</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>40 / 57Nm</td></tr><tr><td>Percussion mechanism (blows per minute)</td><td>7,740 – 29,700</td></tr></table>		Voltage	18V	Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)	Charging time (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	2.3kg	Speed at no load (low / high) in min ⁻¹ (rpm)	50–430 / 160–1.650	Max. torque (stalling / instant torque)	40 / 57Nm	Percussion mechanism (blows per minute)	7,740 – 29,700
Voltage	18V																		
Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)																		
Charging time (usable / full)	65 / 80min.																		
Battery	2 x EY 9L54 B																		
Weight (incl. battery)	2.3kg																		
Speed at no load (low / high) in min ⁻¹ (rpm)	50–430 / 160–1.650																		
Max. torque (stalling / instant torque)	40 / 57Nm																		
Percussion mechanism (blows per minute)	7,740 – 29,700																		
ITEM NUMBER	DESIGNATION	RRP																	
EY7950X	Body only - without batteries and charger in the box	£169.00																	
EY7950XT	Body only - without batteries and charger in SYSTAINER	£189.00																	
EY7950LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER	£369.00																	

FURTHER CORDLESS DRILL DRIVER


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
14,4 V		<div><div><div>EY 7940 X / LS2S</div><div><ul style="list-style-type: none">■ Light weight 1.8kg (incl. battery)■ 18-stage clutch plus drill position■ 13mm high-capacity drill chuck (keyless)■ Powerful percussion mechanism for fast drilling■ Electric speed control, electric brake; reversible■ Secure front handle</div></div></div>	<table><tr><td>Voltage</td><td>14.4V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>4.2Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>50 / 60min.</td></tr><tr><td>Battery</td><td>2 x EY 9L45 B</td></tr><tr><td>Weight (incl. battery)</td><td>1.8kg</td></tr><tr><td>Speed at no load (low / high) in min⁻¹ (rpm)</td><td>70–400 / 200–1,400</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>28 / 41.5Nm</td></tr><tr><td>Percussion mechanism (blows per minute)</td><td>7,200 – 25,200</td></tr></table>	Voltage	14.4V	Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)	Charging time (usable / full)	50 / 60min.	Battery	2 x EY 9L45 B	Weight (incl. battery)	1.8kg	Speed at no load (low / high) in min ⁻¹ (rpm)	70–400 / 200–1,400	Max. torque (stalling / instant torque)	28 / 41.5Nm	Percussion mechanism (blows per minute)	7,200 – 25,200
			Voltage	14.4V															
Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)																		
Charging time (usable / full)	50 / 60min.																		
Battery	2 x EY 9L45 B																		
Weight (incl. battery)	1.8kg																		
Speed at no load (low / high) in min ⁻¹ (rpm)	70–400 / 200–1,400																		
Max. torque (stalling / instant torque)	28 / 41.5Nm																		
Percussion mechanism (blows per minute)	7,200 – 25,200																		
ITEM NUMBER	DESIGNATION		RRP																
EY7940X	Body only - without batteries and charger in the box		£129.00																
EY7940LS2S	Kit with 2 batteries 4.2 Ah and charger in the case		£309.00																




VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
14,4 V		<div><div></div><div>EY 7441 X / LS2S<ul style="list-style-type: none">■ Light weight 1.75kg (incl. battery)■ 13mm high-capacity drill chuck (keyless)■ Electric speed control■ Electric brake■ Reversible■ Belt hook and soft grip</div></div> <table><tr><td>Voltage</td><td>14.4V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>4.2Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>50 / 60min.</td></tr><tr><td>Battery</td><td>2 x EY 9L45 B</td></tr><tr><td>Weight (incl. battery)</td><td>1.75kg</td></tr><tr><td>Speed at no load in rpm (low / high)</td><td>70–400 / 200–1,400</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>28 / 41.5Nm</td></tr><tr><td>Clutch stages</td><td>18 + drill position</td></tr></table>		Voltage	14.4V	Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)	Charging time (usable / full)	50 / 60min.	Battery	2 x EY 9L45 B	Weight (incl. battery)	1.75kg	Speed at no load in rpm (low / high)	70–400 / 200–1,400	Max. torque (stalling / instant torque)	28 / 41.5Nm	Clutch stages	18 + drill position
Voltage	14.4V																		
Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)																		
Charging time (usable / full)	50 / 60min.																		
Battery	2 x EY 9L45 B																		
Weight (incl. battery)	1.75kg																		
Speed at no load in rpm (low / high)	70–400 / 200–1,400																		
Max. torque (stalling / instant torque)	28 / 41.5Nm																		
Clutch stages	18 + drill position																		
ITEM NUMBER	DESIGNATION		RRP																
EY7441X	Body only - without batteries and charger in the box		£119.00																
EY7441LS2S	Kit with 2 batteries 4.2 Ah and charger in the case		£299.00																


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
14,4 V	 TOUGH TOOL IP	EY 7443 X / LS2S <ul style="list-style-type: none">■ Light weight 1.85kg (incl. battery)■ AUTO-function■ 18-stage clutch plus drill position■ 13mm high-capacity drill chuck (keyless)■ Electric speed control■ Electric brake	<table><tr><td>Voltage</td><td>14.4V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>4.2Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>50 / 60min.</td></tr><tr><td>Battery</td><td>2 x EY 9L45 B</td></tr><tr><td>Weight (incl. battery)</td><td>1.85kg</td></tr><tr><td>Speed at no load in rpm (low / high)</td><td>60–400 / 160–1,400</td></tr><tr><td>Max. torque (stalling / instant torque)</td><td>28 / 41.5Nm</td></tr><tr><td>Clutch stages</td><td>18 + drill position</td></tr></table>	Voltage	14.4V	Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)	Charging time (usable / full)	50 / 60min.	Battery	2 x EY 9L45 B	Weight (incl. battery)	1.85kg	Speed at no load in rpm (low / high)	60–400 / 160–1,400	Max. torque (stalling / instant torque)	28 / 41.5Nm	Clutch stages	18 + drill position
		Voltage	14.4V																
Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)																		
Charging time (usable / full)	50 / 60min.																		
Battery	2 x EY 9L45 B																		
Weight (incl. battery)	1.85kg																		
Speed at no load in rpm (low / high)	60–400 / 160–1,400																		
Max. torque (stalling / instant torque)	28 / 41.5Nm																		
Clutch stages	18 + drill position																		
ITEM NUMBER	DESIGNATION		RRP																
EY7443X	Body only - without batteries and charger in the box		£159.00																
EY7443LS2S	Kit with 2 batteries 4.2 Ah and charger in the case		£349.00																


IMPACT WRENCH & DRIVER

NEW


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES															
18 V		EY 76A1 X / XT / PN2G / LJ2G															
		<ul style="list-style-type: none">■ New design high power Brushless motor■ New Hybrid Switch■ 3 speed / torque stages (low / middle / high)■ Battery capacity indicator and LED light■ Compact body 127mm and fresh new 'Carbon' design	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>3.0 or 5.0Ah (Li-ion)</td></tr><tr><td>Charging time with EY0L82B (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>1.7kg</td></tr><tr><td>Speed at no load in rpm</td><td>0-2,800 / 0-1,450 / 0-950</td></tr><tr><td>Max. torque (low / middle / high)</td><td>26 / 150 / 170Nm</td></tr><tr><td>Impact (low / middle / high) in min⁻¹ (rpm)</td><td>0-1,800 / 0-2,500 / 0-3,100</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)	Charging time with EY0L82B (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	1.7kg	Speed at no load in rpm	0-2,800 / 0-1,450 / 0-950	Max. torque (low / middle / high)	26 / 150 / 170Nm
Voltage	18V																
Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)																
Charging time with EY0L82B (usable / full)	65 / 80min.																
Battery	2 x EY 9L54 B																
Weight (incl. battery)	1.7kg																
Speed at no load in rpm	0-2,800 / 0-1,450 / 0-950																
Max. torque (low / middle / high)	26 / 150 / 170Nm																
Impact (low / middle / high) in min ⁻¹ (rpm)	0-1,800 / 0-2,500 / 0-3,100																
ITEM NUMBER		DESIGNATION	RRP														
EY76A1X		Body only - without batteries and charger in the box	£199.00														
EY76A1XT		Body only - without batteries and charger in SYSTAINER	£229.00														
EY76A1PN2G		Kit with 2 batteries 3.0 Ah and charger in SYSTAINER	£379.00														
EY76A1LJ2G		Kit with 2 batteries 5.0 Ah and charger in SYSTAINER	£419.00														


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V	  	EY 75A8 X / XT / PN2G / LJ2G <ul style="list-style-type: none">■ Light weight 1.6kg (incl. battery)■ 1/2" square drive■ Brushless motor and hybrid switch■ Electric speed control■ Electric brake■ Belt hook and LED light	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>3.0 or 5.0Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>1.6 kg</td></tr><tr><td>Speed at no load in rpm</td><td>0 – 2,500</td></tr><tr><td>Max. torque (low / middle / high)</td><td>120 / 140 / 280 Nm</td></tr><tr><td>Impact (low / middle / high)</td><td>3</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)	Charging time (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	1.6 kg	Speed at no load in rpm	0 – 2,500	Max. torque (low / middle / high)	120 / 140 / 280 Nm	Impact (low / middle / high)	3
		Voltage	18V																
Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)																		
Charging time (usable / full)	65 / 80min.																		
Battery	2 x EY 9L54 B																		
Weight (incl. battery)	1.6 kg																		
Speed at no load in rpm	0 – 2,500																		
Max. torque (low / middle / high)	120 / 140 / 280 Nm																		
Impact (low / middle / high)	3																		
ITEM NUMBER	DESIGNATION		RRP																
EY75A8X	Body only - without batteries and charger in the box		£235.00																
EY75A8XT	Body only - without batteries and charger in SYSTAINER		£255.00																
EY75A8PN2G	Kit with 2 batteries 3.0 Ah and charger in SYSTAINER		£409.00																
EY75A8LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£449.00																

VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V		<div><div><div>EY 7552 X / XT / LJ2S</div><div><ul style="list-style-type: none">■ Light weight 2.6kg■ Compact body length: 214mm■ High power: max. 470Nm■ New twin hammer block design■ Electric speed control■ Electric brake</div></div></div>	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>5.0Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.6kg</td></tr><tr><td>Speed at no load in min⁻¹ (rpm)</td><td>0 – 1.550</td></tr><tr><td>Max. torque</td><td>470Nm</td></tr><tr><td>Impact in min⁻¹ (rpm)</td><td>0 – 2.400</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)	Charging time (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	2.6kg	Speed at no load in min ⁻¹ (rpm)	0 – 1.550	Max. torque	470Nm	Impact in min ⁻¹ (rpm)	0 – 2.400
			Voltage	18V															
Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)																		
Charging time (usable / full)	65 / 80min.																		
Battery	2 x EY 9L54 B																		
Weight (incl. battery)	2.6kg																		
Speed at no load in min ⁻¹ (rpm)	0 – 1.550																		
Max. torque	470Nm																		
Impact in min ⁻¹ (rpm)	0 – 2.400																		
ITEM NUMBER	DESIGNATION		RRP																
EY7552X	Body only - without batteries and charger in the box		£349.00																
EY7552XT	Body only - without batteries and charger in SYSTAINER		£369.00																
EY7552LJ2S	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£549.00																


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES														
14,4 V		EY 7549 X / LS2S <ul style="list-style-type: none">■ Light weight 1.85kg (incl. battery)■ Multifunction: Drill, Screwdriver, Impact Driver, Impact Wrench■ Two modes: impact mode and drilldriver mode■ Quick change 1/4" hex adaptor■ Drilldriver mode with 21 stage clutch plus drill position														
			<table><tr><td>Voltage</td><td>14.4V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>4.2Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>50 / 60min.</td></tr><tr><td>Battery</td><td>2 x EY 9L45 B</td></tr><tr><td>Weight (incl. battery)</td><td>1.85kg</td></tr><tr><td>Speed at no load in rpm</td><td>380 – 1,200</td></tr><tr><td>Max. torque (low / high)</td><td>9 / 26Nm</td></tr><tr><td>Clutch torque</td><td>0,7 – 4,4Nm</td></tr></table>	Voltage	14.4V	Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)	Charging time (usable / full)	50 / 60min.	Battery	2 x EY 9L45 B	Weight (incl. battery)	1.85kg	Speed at no load in rpm	380 – 1,200	Max. torque (low / high)
Voltage	14.4V															
Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)															
Charging time (usable / full)	50 / 60min.															
Battery	2 x EY 9L45 B															
Weight (incl. battery)	1.85kg															
Speed at no load in rpm	380 – 1,200															
Max. torque (low / high)	9 / 26Nm															
Clutch torque	0,7 – 4,4Nm															
ITEM NUMBER	DESIGNATION		RRP													
EY7549X	Body only - without batteries and charger in the box		£215.00													
EY7549LS2S	Kit with 2 batteries 4.2 Ah and charger in the case		£389.00													


SDS-PLUS ROTARY HAMMER

VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V		EY 78A1 X / XT / PN2G / LJ2G <ul style="list-style-type: none">■ Light weight 2.6kg (incl. battery)■ Dual function: Rotary Hammer or Drill & Driver■ 5 stage torque clutch plus drill position■ Drill chuck SDS-plus■ 'T shape' design for improved balance and ergonomics■ Reversible	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>3.0 or 5.0Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.6kg</td></tr><tr><td>Speed at no load in min⁻¹ (rpm)</td><td>0 – 1,250</td></tr><tr><td>Blows per minute (soft / hard mode)</td><td>0 – 4,750</td></tr><tr><td>Drill chuck</td><td>SDS-plus type</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)	Charging time (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	2.6kg	Speed at no load in min ⁻¹ (rpm)	0 – 1,250	Blows per minute (soft / hard mode)	0 – 4,750	Drill chuck	SDS-plus type
Voltage	18V																		
Battery capacity accord. to IEC (technology)	3.0 or 5.0Ah (Li-ion)																		
Charging time (usable / full)	65 / 80min.																		
Battery	2 x EY 9L54 B																		
Weight (incl. battery)	2.6kg																		
Speed at no load in min ⁻¹ (rpm)	0 – 1,250																		
Blows per minute (soft / hard mode)	0 – 4,750																		
Drill chuck	SDS-plus type																		
ITEM NUMBER	DESIGNATION		RRP																
EY78A1X	Body only - without batteries and charger in the box		£349.00																
EY78A1XT	Body only - without batteries and charger in SYSTAINER		£369.00																
EY78A1PN2G	Kit with 2 batteries 3.0 Ah and charger in SYSTAINER		£475.00																
EY78A1LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£499.00																


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
28,8 V	 TOUGH TOOL IP	EY 7881 X / XT / PC2S / XVT / PC2V <ul style="list-style-type: none">■ Light weight 3.9 kg (incl. Battery)■ Hard and soft hammering mode for best results in different materials■ Slow, medium and high speed drilling mode for different materials■ Chisel attachment included■ Electric speed control and electric brake■ Vibration-damping soft rubber grip	<table><tr><td>Voltage</td><td>28.8V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>3.4Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>60 / 90min.</td></tr><tr><td>Battery</td><td>2 x EY 9L84 B</td></tr><tr><td>Weight (incl. battery)</td><td>3.9 kg</td></tr><tr><td>Speed at no load in min⁻¹ (rpm)</td><td>0-560 / 0-680 / 0-840</td></tr><tr><td>Blows per minute (soft / med. / hard mode)</td><td>0-2950 / 0-3600 / 0-4400</td></tr><tr><td>Drill chuck</td><td>SDS-plus type</td></tr></table>	Voltage	28.8V	Battery capacity accord. to IEC (technology)	3.4Ah (Li-ion)	Charging time (usable / full)	60 / 90min.	Battery	2 x EY 9L84 B	Weight (incl. battery)	3.9 kg	Speed at no load in min ⁻¹ (rpm)	0-560 / 0-680 / 0-840	Blows per minute (soft / med. / hard mode)	0-2950 / 0-3600 / 0-4400	Drill chuck	SDS-plus type
		Voltage	28.8V																
Battery capacity accord. to IEC (technology)	3.4Ah (Li-ion)																		
Charging time (usable / full)	60 / 90min.																		
Battery	2 x EY 9L84 B																		
Weight (incl. battery)	3.9 kg																		
Speed at no load in min ⁻¹ (rpm)	0-560 / 0-680 / 0-840																		
Blows per minute (soft / med. / hard mode)	0-2950 / 0-3600 / 0-4400																		
Drill chuck	SDS-plus type																		
ITEM NUMBER	DESIGNATION		RRP																
EY7881X	Body only - without batteries and charger in the box		£515.00																
EY7881XT	Body only - without batteries and charger in SYSTAINER		£559.00																
EY7881PC2S	Kit with 2 batteries 3.4 Ah and charger in SYSTAINER		£799.00																
EY7881XVT	Body only - without batteries and charger in the box - incl. DCS in SYSTAINER		£629.00																
EY7881PC2V	Kit with 2 batteries 3.4 Ah and charger - incl. DCS in SYSTAINER		£859.00																


SAWS

VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES		
18 V		EY 4550 X / XT / LJ2G		
		<ul style="list-style-type: none">■ Cordless Jigsaw with 4 stage pendulum■ Light weight 3.35kg (incl. battery)		
		Battery capacity accord. to IEC (technology)	Depending on battery	
		Charging time with EY 9L54 B (usable / fullt)	65 / 80min.	
		Stroke per minute with EY 9L54 B in min ⁻¹ (rpm)	2.500 min ⁻¹	
		Weight (incl. battery EY 9L54 B)	3,35 kg	
Max. cutting depth / Blade size	65 mm / 26 mm			
ITEM NUMBER		DESIGNATION		RRP
EY4550X		Body only - without batteries and charger in the box		£199.00
EY4550XT		Body only - without batteries and charger in SYSTAINER		£225.00
EY4550LJ2G		Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£429.00


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V		<div>EY 45A1 X / XT / LJ2G<ul style="list-style-type: none">■ Cordless Reciprocating Saw■ 65min. usable and 80min. full charging■ Light weight 3.4kg (incl. battery)■ Counter balance mechanism for reduced vibration■ For metal, plastic and wood■ Electronic stroke rate stabilization</div>	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>5.0Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>3.4kg</td></tr><tr><td>Stroke per minute in min⁻¹ (rpm)</td><td>2.800</td></tr><tr><td>Stroke length</td><td>28mm</td></tr><tr><td>Max. thickness of saw blades</td><td>1.6mm</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)	Charging time (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	3.4kg	Stroke per minute in min ⁻¹ (rpm)	2.800	Stroke length	28mm	Max. thickness of saw blades	1.6mm
Voltage	18V																		
Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)																		
Charging time (usable / full)	65 / 80min.																		
Battery	2 x EY 9L54 B																		
Weight (incl. battery)	3.4kg																		
Stroke per minute in min ⁻¹ (rpm)	2.800																		
Stroke length	28mm																		
Max. thickness of saw blades	1.6mm																		
ITEM NUMBER	DESIGNATION		RRP																
EY45A1X	Body only - without batteries and charger in the box		£225.00																
EY45A1XT	Body only - without batteries and charger in SYSTAINER		£249.00																
EY45A1LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£429.00																

SAWS


VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES																	
18 V		<div>EY45A2 X / XT / LJ2G</div> <ul style="list-style-type: none">■ Cordless Multi Purpose Cutter with ergonomic design■ Light weight 2.8kg (incl. battery)■ Metal Cutter Blade as standard accessory■ For metal, plastic and wood■ Electric speed control■ 3-way dust control system■ Incl. METALBLADE / or WOODBLADE	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>5.0Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.8kg</td></tr><tr><td>Speed at no load in min⁻¹ (rpm)</td><td>4.500</td></tr><tr><td>Max. cutting depth</td><td>46mm</td></tr><tr><td>Blade size (outer diameter)</td><td>135mm</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)	Charging time (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	2.8kg	Speed at no load in min ⁻¹ (rpm)	4.500	Max. cutting depth	46mm	Blade size (outer diameter)	135mm
			Voltage	18V															
Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)																		
Charging time (usable / full)	65 / 80min.																		
Battery	2 x EY 9L54 B																		
Weight (incl. battery)	2.8kg																		
Speed at no load in min ⁻¹ (rpm)	4.500																		
Max. cutting depth	46mm																		
Blade size (outer diameter)	135mm																		
ITEM NUMBER	DESIGNATION		RRP																
EY45A2XM	Body only - without batteries and charger in the box / incl. METALBLADE		£225.00																
EY45A2XMT	Body only - without batteries and charger in SYSTAINER / incl. METALBLADE		£249.00																
EY45A2LJ2G	including 2 batteries 5.0 Ah and charger in SYSTAINER / incl. METALBLADE		£429.00																
EY45A2XW	Body only - without batteries and charger in the box / incl. WOODBLADE		£225.00																
EY45A2XWT	Body only - without batteries and charger in SYSTAINER / incl. WOODBLADE		£249.00																

VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES															
18 V	<div></div> <div>EY 45A5 X / XT / LJ2G<ul style="list-style-type: none">■ Cordless Band Saw■ Adjustable belt speed 3-fold■ incl. 2 saw bands (18 teeth)■ Second handle and LED lighting■ Large guide plate stabilizes the workpiece■ Trigger switch with speed rule■ Low weight of 4.05 kg</div>	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>5,0 Ah (Li-Ionen)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80 Min.</td></tr><tr><td>Weight (incl. battery)</td><td>4,05 kg</td></tr><tr><td>Belt speed without load 1/2/3 in rpm</td><td>120m/140m/162m</td></tr><tr><td>Sawband</td><td>730 x 13 x 0,5mm</td></tr><tr><td>Cutting capacity of round QS / angular QS</td><td>63,5mm/56x63,5mm</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	5,0 Ah (Li-Ionen)	Charging time (usable / full)	65 / 80 Min.	Weight (incl. battery)	4,05 kg	Belt speed without load 1/2/3 in rpm	120m/140m/162m	Sawband	730 x 13 x 0,5mm	Cutting capacity of round QS / angular QS	63,5mm/56x63,5mm	
Voltage	18V																
Battery capacity accord. to IEC (technology)	5,0 Ah (Li-Ionen)																
Charging time (usable / full)	65 / 80 Min.																
Weight (incl. battery)	4,05 kg																
Belt speed without load 1/2/3 in rpm	120m/140m/162m																
Sawband	730 x 13 x 0,5mm																
Cutting capacity of round QS / angular QS	63,5mm/56x63,5mm																
ITEM NUMBER	DESIGNATION		RRP														
EY45A5X	Body only - without batteries and charger in the box		£299.00														
EY45A5XT	Body only - without batteries and charger in SYSTAINER		£319.00														
EY45A5LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£499.00														

ANGLE GRINDER

VOLTAGE (V) CAPACITY (AH)		MODEL / FEATURES														
18 V		EY 46A2 X / XT / LJ2G <ul style="list-style-type: none">■ Light weight 2.35kg (incl. battery)■ For 125mm discs■ Spindle lock for easy disc changes■ Safety function, when battery is inserted at switch 'on'■ Re-start function■ For hardly accessible places														
		<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>5.0Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80min.</td></tr><tr><td>Battery</td><td>2 x EY 9L54 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.35kg</td></tr><tr><td>Speed at no load in min⁻¹ (rpm)</td><td>10.000</td></tr><tr><td>Disc size (outer diameter)</td><td>125mm</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)	Charging time (usable / full)	65 / 80min.	Battery	2 x EY 9L54 B	Weight (incl. battery)	2.35kg	Speed at no load in min ⁻¹ (rpm)	10.000	Disc size (outer diameter)	125mm
Voltage	18V															
Battery capacity accord. to IEC (technology)	5.0Ah (Li-ion)															
Charging time (usable / full)	65 / 80min.															
Battery	2 x EY 9L54 B															
Weight (incl. battery)	2.35kg															
Speed at no load in min ⁻¹ (rpm)	10.000															
Disc size (outer diameter)	125mm															
ITEM NUMBER	DESIGNATION		RRP													
EY46A2X	Body only - without batteries and charger in the box		£225.00													
EY46A2XT	Body only - without batteries and charger in SYSTAINER		£249.00													
EY46A2LJ2G	Kit with 2 batteries 5.0 Ah and charger in SYSTAINER		£429.00													

NEW

VOLTAGE [V] CAPACITY [AH]		MODEL / FEATURES															
18 V	14,4 V	<div></div> <div>EY 46A5 X / XT / LJ2G<ul style="list-style-type: none">■ Cordless Multitool■ incl. wood and metal blade■ Speed adjustment dial■ Lock-On switch■ Built-in LED worklight■ Low weight of 1.95 kg</div>	<table><tr><td>Voltage</td><td>18V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>5,0 Ah (Li-Ionen)</td></tr><tr><td>Charging time (usable / full)</td><td>65 / 80 Min.</td></tr><tr><td>Weight (incl. battery)</td><td>1.95 kg</td></tr><tr><td>Oscillation speed</td><td>6,000-20,000 min⁻¹</td></tr><tr><td></td><td>(Speed adjustment dial)</td></tr><tr><td>Oscillation angle</td><td>3 degrees</td></tr></table>	Voltage	18V	Battery capacity accord. to IEC (technology)	5,0 Ah (Li-Ionen)	Charging time (usable / full)	65 / 80 Min.	Weight (incl. battery)	1.95 kg	Oscillation speed	6,000-20,000 min ⁻¹		(Speed adjustment dial)	Oscillation angle	3 degrees
Voltage	18V																
Battery capacity accord. to IEC (technology)	5,0 Ah (Li-Ionen)																
Charging time (usable / full)	65 / 80 Min.																
Weight (incl. battery)	1.95 kg																
Oscillation speed	6,000-20,000 min ⁻¹																
	(Speed adjustment dial)																
Oscillation angle	3 degrees																
ITEM NUMBER		DESIGNATION	RRP														
EY46A5X		Body only - without batteries and charger in the box	£269.00														
EY46A5XT		Body only - without batteries and charger in SYSTAINER	£309.00														
EY46A5LJ2G		Kit with 2 batteries 5.0 Ah and charger in SYSTAINER	£499.00														

COMBO-KITS: TWIN PACK FOR PROFESSIONALS

Choose which set suits you best from our TWIN-KIT line up.

**BRUSHLESS
MOTOR**



**TOUGH
TOOL IP™**

FLEXBOX: A WIDE CHOICE OF COMBINATIONS

You can choose which tools you need to suit your requirements.*



	ITEM NUMBER	DESIGNATION		RRP
NEW	EYC231LJ2G	1 x EY74A3X Drilldriver	LJ (5,0 Ah) J5.0Ah	£579.00
	EYC231PN2G	1 x EY76A1X 1 x Charger / 2 x Batteries 5,0Ah or 3,0Ah 1 x T-Loc Systainer	PN (3,0 Ah) P3.0Ah	£529.00
NEW	EYC232LJ2G	1 x EY74A3X Drilldriver	LJ (5,0 Ah) J5.0Ah	£599.00
	EYC232PN2G	1 x EY75A8X Impact wrench square drive 1 x Charger / 2 x Batteries 5,0Ah or 3,0Ah 1 x T-Loc Systainer	PN (3,0 Ah) P3.0Ah	£549.00
NEW	EYC241LJ2G	1 x EY79A3X Drilldriver with percussion	LJ (5,0 Ah) J5.0Ah	£589.00
	EYC241PN2G	1 x EY76A1X 1 x Charger / 2 x Batteries 5,0Ah or 3,0Ah 1 x T-Loc Systainer	PN (3,0 Ah) P3.0Ah	£539.00
NEW	EYC242LJ2G	1 x EY79A3X Drilldriver with percussion	LJ (5,0 Ah) J5.0Ah	£609.00
	EYC242PN2G	1 x EY75A8X Impact wrench square drive 1 x Charger / 2 x Batteries 5,0Ah or 3,0Ah 1 x T-Loc Systainer	PN (3,0 Ah) P3.0Ah	£559.00

	ITEM NUMBER	DESIGNATION		RRP
	FLEXBOX 2	■ 2 Tools (selection above)* ■ 2 Batteries ■ 1 Charger ■ 1 x T-Loc Systainer	LJ (5,0 Ah) J5.0Ah PN (3,0 Ah) P3.0Ah	£829.00 £789.00
	FLEXBOX 3	■ 3 Tools (selection above)* ■ 3 Batteries ■ 1 Charger ■ 2 x T-Loc Systainer	LJ (5,0 Ah) J5.0Ah PN (3,0 Ah) P3.0Ah	£1.059.00 £999.00
	FLEXBOX 4	■ 4 Tools (selection above)* ■ 3 Batteries ■ 1 Charger ■ 2 x T-Loc Systainer	LJ (5,0 Ah) J5.0Ah PN (3,0 Ah) P3.0Ah	£1.299.00 £1.239.00
	FLEXBOX 5	■ 5 Tools (selection above)* ■ 4 Batteries ■ 1 Charger ■ 3 x T-Loc Systainer	LJ (5,0 Ah) J5.0Ah PN (3,0 Ah) P3.0Ah	£1.579.00 £1.499.00
	FLEXBOX 6	■ 6 Tools (selection above)* ■ 5 Batteries ■ 1 Charger ■ 3 x T-Loc Systainer	LJ (5,0 Ah) J5.0Ah PN (3,0 Ah) P3.0Ah	£1.899.00 £1.799.00
	FLEXBOX 7	■ 7 Tools (selection above)* ■ 5 Batteries ■ 1 Charger ■ 4 x T-Loc Systainer	LJ (5,0 Ah) J5.0Ah PN (3,0 Ah) P3.0Ah	£2.099.00 £1.999.00
	FLEXBOX 8	■ 8 Tools (selection above)* ■ 6 Batteries ■ 2 x Charger ■ 4 x T-Loc Systainer	LJ (5,0 Ah) J5.0Ah PN (3,0 Ah) P3.0Ah	£2.399.00 £2.279.00

*each tool is only selectable once per Flexbox. Exceptions: EY74A3X/EY79A3X/EY76A1X/EY75A8X

SCREWDRIVER

VOLTAGE (V) CAPACITY (Ah)		MODEL / FEATURES		RRP																
3,6 V	1,5 Ah		EY 7410 LA2S <ul style="list-style-type: none">■ 1.5Ah Li-ion battery pack■ Light weight 0.5kg (incl. battery)■ 1/4" hex drive■ 'Auto shut off clutch' with 21 stages■ Electronic shut off and clutch lock cover■ LED light■ Incl. second battery pack	<table><tr><td>Voltage</td><td>3.6V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>1.5Ah (Li-ion)</td></tr><tr><td>Charging time (full)</td><td>30min.</td></tr><tr><td>Battery</td><td>2 x EY 9L10 B</td></tr><tr><td>Weight (incl. battery)</td><td>0.5kg</td></tr><tr><td>Speed at no load (low / high) in rpm</td><td>200 / 600</td></tr><tr><td>Max. torque / clutch stages</td><td>4.4Nm / 21</td></tr><tr><td>Clutch torque</td><td>Approx. 0.3–2.9Nm</td></tr></table> £179.00	Voltage	3.6V	Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)	Charging time (full)	30min.	Battery	2 x EY 9L10 B	Weight (incl. battery)	0.5kg	Speed at no load (low / high) in rpm	200 / 600	Max. torque / clutch stages	4.4Nm / 21	Clutch torque	Approx. 0.3–2.9Nm
Voltage	3.6V																			
Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)																			
Charging time (full)	30min.																			
Battery	2 x EY 9L10 B																			
Weight (incl. battery)	0.5kg																			
Speed at no load (low / high) in rpm	200 / 600																			
Max. torque / clutch stages	4.4Nm / 21																			
Clutch torque	Approx. 0.3–2.9Nm																			
3,6 V	1,5 Ah		EY 7410 LA1C <ul style="list-style-type: none">■ Same as EY7410LA2S■ Without charger and clutch lock cover■ Incl. one battery pack	<table><tr><td>Voltage</td><td>3.6V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>1.5Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>30min.</td></tr><tr><td>Battery</td><td>1 x EY 9L10 B</td></tr><tr><td>Weight (incl. battery)</td><td>0.5kg</td></tr><tr><td>Speed at no load (low / high) in rpm</td><td>200 / 600</td></tr><tr><td>Max. torque /clutch stages</td><td>4.4Nm / 21</td></tr><tr><td>Clutch torque</td><td>Approx. 0.3–2.9Nm</td></tr></table> £119.00	Voltage	3.6V	Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)	Charging time (usable / full)	30min.	Battery	1 x EY 9L10 B	Weight (incl. battery)	0.5kg	Speed at no load (low / high) in rpm	200 / 600	Max. torque /clutch stages	4.4Nm / 21	Clutch torque	Approx. 0.3–2.9Nm
Voltage	3.6V																			
Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)																			
Charging time (usable / full)	30min.																			
Battery	1 x EY 9L10 B																			
Weight (incl. battery)	0.5kg																			
Speed at no load (low / high) in rpm	200 / 600																			
Max. torque /clutch stages	4.4Nm / 21																			
Clutch torque	Approx. 0.3–2.9Nm																			
3,6 V	1,5 Ah		EY 7411 LA1S <ul style="list-style-type: none">■ 1.5Ah Li-ion battery pack■ Light weight 0.5kg (incl. battery)■ Screw count function■ 1/4" hex drive■ 'Auto shut off clutch' with 21 stages■ Electronic shut off■ LED light■ Incl. one battery pack	<table><tr><td>Voltage</td><td>3.6V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>1.5Ah (Li-ion)</td></tr><tr><td>Charging time (full)</td><td>30min.</td></tr><tr><td>Battery</td><td>1 x EY 9L10 B</td></tr><tr><td>Weight (incl. battery)</td><td>0.5kg</td></tr><tr><td>Speed at no load (low / high) in rpm</td><td>200 / 600</td></tr><tr><td>Max. torque / clutch stages</td><td>4.4Nm / 21</td></tr><tr><td>Clutch torque</td><td>Approx. 0.3–2.9Nm</td></tr></table> £199.00	Voltage	3.6V	Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)	Charging time (full)	30min.	Battery	1 x EY 9L10 B	Weight (incl. battery)	0.5kg	Speed at no load (low / high) in rpm	200 / 600	Max. torque / clutch stages	4.4Nm / 21	Clutch torque	Approx. 0.3–2.9Nm
Voltage	3.6V																			
Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)																			
Charging time (full)	30min.																			
Battery	1 x EY 9L10 B																			
Weight (incl. battery)	0.5kg																			
Speed at no load (low / high) in rpm	200 / 600																			
Max. torque / clutch stages	4.4Nm / 21																			
Clutch torque	Approx. 0.3–2.9Nm																			
3,6 V	1,5 Ah		EY 7411 LA1C <ul style="list-style-type: none">■ Same as EY7411LA1C■ Without charger■ Incl. one battery pack	<table><tr><td>Voltage</td><td>3.6V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>1.5Ah (Li-ion)</td></tr><tr><td>Charging time (full)</td><td>30min.</td></tr><tr><td>Battery</td><td>1 x EY 9L10 B</td></tr><tr><td>Weight (incl. battery)</td><td>0.5kg</td></tr><tr><td>Speed at no load (low / high) in rpm</td><td>200 / 600</td></tr><tr><td>Max. torque / clutch stages</td><td>4.4Nm / 21</td></tr><tr><td>Clutch torque</td><td>Approx. 0.3–2.9Nm</td></tr></table> £139.00	Voltage	3.6V	Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)	Charging time (full)	30min.	Battery	1 x EY 9L10 B	Weight (incl. battery)	0.5kg	Speed at no load (low / high) in rpm	200 / 600	Max. torque / clutch stages	4.4Nm / 21	Clutch torque	Approx. 0.3–2.9Nm
Voltage	3.6V																			
Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)																			
Charging time (full)	30min.																			
Battery	1 x EY 9L10 B																			
Weight (incl. battery)	0.5kg																			
Speed at no load (low / high) in rpm	200 / 600																			
Max. torque / clutch stages	4.4Nm / 21																			
Clutch torque	Approx. 0.3–2.9Nm																			
3,7 V	850 mAh		EY 7412 SB <ul style="list-style-type: none">■ Built-in Li-ion battery■ Light weight 165g (incl.battery)■ 1/4" (6.35mm) Hex one-touch bit lock■ LED light■ USB charging	<table><tr><td>Battery (built-in)</td><td>Li-ion DC3.7V 850mAh</td></tr><tr><td>Charging terminal</td><td>Micro USB Type-B DC5V</td></tr><tr><td>Weight (incl.battery)</td><td>165 g</td></tr><tr><td>Speed at no load</td><td>230 min⁻¹</td></tr><tr><td>Maximum instant torque</td><td>1.0 Nm</td></tr><tr><td>Shaft lock durability</td><td>up to 8 Nm</td></tr></table> £65.00	Battery (built-in)	Li-ion DC3.7V 850mAh	Charging terminal	Micro USB Type-B DC5V	Weight (incl.battery)	165 g	Speed at no load	230 min ⁻¹	Maximum instant torque	1.0 Nm	Shaft lock durability	up to 8 Nm				
Battery (built-in)	Li-ion DC3.7V 850mAh																			
Charging terminal	Micro USB Type-B DC5V																			
Weight (incl.battery)	165 g																			
Speed at no load	230 min ⁻¹																			
Maximum instant torque	1.0 Nm																			
Shaft lock durability	up to 8 Nm																			

NEW

SEALING GUN

VOLTAGE (V) CAPACITY (Ah)		MODEL / FEATURES	RRP												
14,4 V	4,2 Ah	<div></div> <div>EY 3641 LS1S<ul style="list-style-type: none">■ High-performance 4.2Ah Li-ion battery pack■ Light weight 2.8kg (incl. battery)■ For cartridge and foil pack up to 600ml■ Electric speed control■ Fully automatic decompression■ Incl. one battery pack</div>	<table><tr><td>Voltage</td><td>14.4V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>4.2Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>50 / 60min.</td></tr><tr><td>Battery</td><td>1 x EY 9L45 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.8kg</td></tr><tr><td>Pushing pressure</td><td>4,410N (450kgf)</td></tr></table> £359.00	Voltage	14.4V	Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)	Charging time (usable / full)	50 / 60min.	Battery	1 x EY 9L45 B	Weight (incl. battery)	2.8kg	Pushing pressure	4,410N (450kgf)
Voltage	14.4V														
Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)														
Charging time (usable / full)	50 / 60min.														
Battery	1 x EY 9L45 B														
Weight (incl. battery)	2.8kg														
Pushing pressure	4,410N (450kgf)														
14,4 V		<div></div> <div>EY 3641 K<ul style="list-style-type: none">■ Same as EY 3641 LS1S■ Incl. plastic box, without battery and charger■ Compatible with the following batteries 14.4V: EY 9L47 B, EY 9L45 B, EY 9L44 B, EY 9L42 B</div>	<table><tr><td>Voltage</td><td>14.4V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>Depending on battery</td></tr><tr><td>Charging time with EY 9L45 B (usable / full)</td><td>50 / 60min.</td></tr><tr><td>Weight (incl. battery EY 9L45 B)</td><td>2.8kg</td></tr><tr><td>Pushing pressure with EY 9L45 B</td><td>4,410N (450kgf)</td></tr></table> £239.00	Voltage	14.4V	Battery capacity accord. to IEC (technology)	Depending on battery	Charging time with EY 9L45 B (usable / full)	50 / 60min.	Weight (incl. battery EY 9L45 B)	2.8kg	Pushing pressure with EY 9L45 B	4,410N (450kgf)		
Voltage	14.4V														
Battery capacity accord. to IEC (technology)	Depending on battery														
Charging time with EY 9L45 B (usable / full)	50 / 60min.														
Weight (incl. battery EY 9L45 B)	2.8kg														
Pushing pressure with EY 9L45 B	4,410N (450kgf)														
14,4 V	4,2 Ah	<div></div> <div>EY 3640 LS1S<ul style="list-style-type: none">■ High-performance 4.2Ah Li-ion battery pack■ Light weight 2.65kg (incl. battery)■ For 310ml cartridge■ Electric speed control■ Fully automatic decompression■ Incl. one battery pack</div>	<table><tr><td>Voltage</td><td>14.4V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>4.2Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>50 / 60min.</td></tr><tr><td>Battery</td><td>1 x EY 9L45 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.65kg</td></tr><tr><td>Pushing pressure</td><td>4,410N (450kgf)</td></tr></table> £345.00	Voltage	14.4V	Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)	Charging time (usable / full)	50 / 60min.	Battery	1 x EY 9L45 B	Weight (incl. battery)	2.65kg	Pushing pressure	4,410N (450kgf)
Voltage	14.4V														
Battery capacity accord. to IEC (technology)	4.2Ah (Li-ion)														
Charging time (usable / full)	50 / 60min.														
Battery	1 x EY 9L45 B														
Weight (incl. battery)	2.65kg														
Pushing pressure	4,410N (450kgf)														
14,4 V		<div></div> <div>EY 3640 K<ul style="list-style-type: none">■ Same as EY 3640 LS1S■ Incl. plastic box, without battery and charger■ Compatible with the following batteries 14.4V: EY 9L47 B, EY 9L45 B, EY 9L44 B, EY 9L42 B</div>	<table><tr><td>Voltage</td><td>14.4V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>Depending on battery</td></tr><tr><td>Charging time with EY 9L45 B (usable / full)</td><td>50 / 60min.</td></tr><tr><td>Weight (incl. battery EY 9L45 B)</td><td>2.65kg</td></tr><tr><td>Pushing pressure with EY 9L45 B</td><td>4,410N (450kgf)</td></tr></table> £219.00	Voltage	14.4V	Battery capacity accord. to IEC (technology)	Depending on battery	Charging time with EY 9L45 B (usable / full)	50 / 60min.	Weight (incl. battery EY 9L45 B)	2.65kg	Pushing pressure with EY 9L45 B	4,410N (450kgf)		
Voltage	14.4V														
Battery capacity accord. to IEC (technology)	Depending on battery														
Charging time with EY 9L45 B (usable / full)	50 / 60min.														
Weight (incl. battery EY 9L45 B)	2.65kg														
Pushing pressure with EY 9L45 B	4,410N (450kgf)														
3,6 V	1,5 Ah	<div></div> <div>EY 3610 LA1J<ul style="list-style-type: none">■ 1.5Ah Li-ion battery pack■ Light weight 2.15kg (incl. battery)■ Double extending rack keeps body compact■ For cartridge and foil pack up to 400ml■ Electric speed control■ Fully automatic decompression■ Incl. one battery pack</div>	<table><tr><td>Voltage</td><td>3.6V</td></tr><tr><td>Battery capacity accord. to IEC (technology)</td><td>1.5Ah (Li-ion)</td></tr><tr><td>Charging time (usable / full)</td><td>15 / 30min.</td></tr><tr><td>Battery</td><td>1 x EY 9L10 B</td></tr><tr><td>Weight (incl. battery)</td><td>2.15kg</td></tr><tr><td>Pushing pressure</td><td>2,450N (250kgf)</td></tr></table> £319.00	Voltage	3.6V	Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)	Charging time (usable / full)	15 / 30min.	Battery	1 x EY 9L10 B	Weight (incl. battery)	2.15kg	Pushing pressure	2,450N (250kgf)
Voltage	3.6V														
Battery capacity accord. to IEC (technology)	1.5Ah (Li-ion)														
Charging time (usable / full)	15 / 30min.														
Battery	1 x EY 9L10 B														
Weight (incl. battery)	2.15kg														
Pushing pressure	2,450N (250kgf)														

SEALING GUN – BATTERY CAPACITIES

VOLTAGE		14.4V		3.6V
MODEL		EY 3640 LS1S*	EY 3641 LS1S*	EY 3610 LA1J**
	Silicone	380	380	50
	Acrylic	410	410	50
	Polyethelen	190	190	30

Depending on test condition, the measurement result is sometimes different to that of operation manual. The table shows average values of working capacity per fully charged battery.
* Temperature 20°C Ø 5mm cutting hole, 310ml cartridge
** Temperature 20°C Ø 5mm cutting hole, Silicone: Sikaflex-M1 320ml cartridge, Acrylic: Konishi 330ml cartridge, Polyethelen: Sikaflex-221 320ml cartridge







BLOWER, VACUUM CLEANER, FLASHLIGHT, AND RADIO

VOLTAGE (V) CAPACITY (Ah)		MODEL / FEATURES		RRP																
18 V / 14,4 V		EY 37A1 B <ul style="list-style-type: none">■ Suitable for all 18 / 14.4V Li-ion battery packs■ Light weight 1.2kg (excl. battery pack)■ Max. air speed 70m/s■ Hours of use with EY 9L45 B (14.4V) approx. 22min.■ Max. air volume 3m³■ Dual voltage■ Without battery and charger	<table><tr><td>Voltage</td><td>18 / 14.4V</td></tr><tr><td>Battery capacity accord. to IEC</td><td>Depending on battery</td></tr><tr><td>Weight (excl. battery)</td><td>1.2kg</td></tr><tr><td>Hours of use (EY 9L51 B / EY 9L45 B)</td><td>Approx. 15 / 22min.</td></tr><tr><td>Max. air speed (EY 9L51 B / EY 9L45 B)</td><td>Approx. 70 / 60m/s</td></tr><tr><td>Max. air volume (EY 9L51 B / EY 9L45 B)</td><td>Approx. 3 / 2,6 m³/min.</td></tr></table>	Voltage	18 / 14.4V	Battery capacity accord. to IEC	Depending on battery	Weight (excl. battery)	1.2kg	Hours of use (EY 9L51 B / EY 9L45 B)	Approx. 15 / 22min.	Max. air speed (EY 9L51 B / EY 9L45 B)	Approx. 70 / 60m/s	Max. air volume (EY 9L51 B / EY 9L45 B)	Approx. 3 / 2,6 m³/min.	£109.00				
Voltage	18 / 14.4V																			
Battery capacity accord. to IEC	Depending on battery																			
Weight (excl. battery)	1.2kg																			
Hours of use (EY 9L51 B / EY 9L45 B)	Approx. 15 / 22min.																			
Max. air speed (EY 9L51 B / EY 9L45 B)	Approx. 70 / 60m/s																			
Max. air volume (EY 9L51 B / EY 9L45 B)	Approx. 3 / 2,6 m³/min.																			
18 V / 14,4 V		EY 37A3 B <ul style="list-style-type: none">■ Suitable for all 18 / 14.4V Li-ion battery packs■ Light weight 0,89 kg (excl. battery pack)■ Hours of use with EY 9L45 B (14.4V) approx. 22min.■ Max. air volume 3m³■ Dual voltage■ Without battery and charger	<table><tr><td>Voltage</td><td>18 / 14.4V</td></tr><tr><td>Battery capacity accord. to IEC</td><td>Depending on battery</td></tr><tr><td>Weight (excl. battery)</td><td>0.89 kg</td></tr><tr><td>Hours of use (EY 9L54 B / EY 9L53 B)</td><td>Approx. 30 / 18min.</td></tr><tr><td>Dust container</td><td>650 ml</td></tr><tr><td>Maximum suction power (mit EY 9L54 B / EY 9L45 B)</td><td>45 Watt / 27 Watt</td></tr></table>	Voltage	18 / 14.4V	Battery capacity accord. to IEC	Depending on battery	Weight (excl. battery)	0.89 kg	Hours of use (EY 9L54 B / EY 9L53 B)	Approx. 30 / 18min.	Dust container	650 ml	Maximum suction power (mit EY 9L54 B / EY 9L45 B)	45 Watt / 27 Watt	£139.00				
Voltage	18 / 14.4V																			
Battery capacity accord. to IEC	Depending on battery																			
Weight (excl. battery)	0.89 kg																			
Hours of use (EY 9L54 B / EY 9L53 B)	Approx. 30 / 18min.																			
Dust container	650 ml																			
Maximum suction power (mit EY 9L54 B / EY 9L45 B)	45 Watt / 27 Watt																			
21,6 V / 18 V / 14,4 V		EY 37C3 B <ul style="list-style-type: none">■ Suitable for 21.6 / 18 / 14.4V Li-ion battery packs■ Lightweight at just 0.6kg (excl. battery pack)■ 0 to 360 degree adjustment (17 positions)■ 1,500 lumens■ 3,000 Lux (Approx 40cm)■ Without battery and charger	<table><tr><td>Voltage</td><td>21,6 / 18 / 14,4 Volt</td></tr><tr><td>Battery capacity accord. to IEC</td><td>Depending on battery</td></tr><tr><td>Weight (excl. battery)</td><td>0,610 kg</td></tr><tr><td>Electric light bulb</td><td>LED</td></tr><tr><td>Brightness LUMEN</td><td>ca. 1.500 Lumen</td></tr><tr><td>Brightness LUX</td><td>ca. 3.000 Lux</td></tr><tr><td>Hours of use with EY 9L54 B (18V) [side surface]</td><td>ca. 02 Std. 30 Min.</td></tr><tr><td>Hours of use with EY 9L54 B (18V) [entire surface]</td><td>ca. 20 Std. 00 Min.</td></tr></table>	Voltage	21,6 / 18 / 14,4 Volt	Battery capacity accord. to IEC	Depending on battery	Weight (excl. battery)	0,610 kg	Electric light bulb	LED	Brightness LUMEN	ca. 1.500 Lumen	Brightness LUX	ca. 3.000 Lux	Hours of use with EY 9L54 B (18V) [side surface]	ca. 02 Std. 30 Min.	Hours of use with EY 9L54 B (18V) [entire surface]	ca. 20 Std. 00 Min.	£129.00
Voltage	21,6 / 18 / 14,4 Volt																			
Battery capacity accord. to IEC	Depending on battery																			
Weight (excl. battery)	0,610 kg																			
Electric light bulb	LED																			
Brightness LUMEN	ca. 1.500 Lumen																			
Brightness LUX	ca. 3.000 Lux																			
Hours of use with EY 9L54 B (18V) [side surface]	ca. 02 Std. 30 Min.																			
Hours of use with EY 9L54 B (18V) [entire surface]	ca. 20 Std. 00 Min.																			
21,6 V / 18 V / 14,4 V		EY 37C4 B <ul style="list-style-type: none">■ Suitable for 21.6 / 18 / 14.4V Li-ion battery packs■ Lightweight at just 0.38kg (excl. battery pack)■ Hanging handle 360 rotation■ Luminous flux Approx. 750 lumens■ Illuminance Approx. 1,500 lux (at 40cm)■ USB terminal 2 x Type A USB (DC5V) sockets for total 2A output■ Without battery and charger	<table><tr><td>Voltage</td><td>21,6 / 18 / 14,4 Volt</td></tr><tr><td>Battery capacity accord. to IEC</td><td>Depending on battery</td></tr><tr><td>Weight (excl. battery)</td><td>0,38 kg</td></tr><tr><td>Electric light bulb</td><td>LED</td></tr><tr><td>Brightness LUMEN</td><td>ca. 750 Lumen</td></tr><tr><td>Brightness LUX</td><td>ca. 1.500 Lux</td></tr><tr><td>Hours of use with EY 9L54 B (18V) [side surface]</td><td>ca. 7 Std. 20 Min.</td></tr><tr><td>Hours of use with EY 9L54 B (18V) [entire surface]</td><td>ca. 70 Std.</td></tr></table>	Voltage	21,6 / 18 / 14,4 Volt	Battery capacity accord. to IEC	Depending on battery	Weight (excl. battery)	0,38 kg	Electric light bulb	LED	Brightness LUMEN	ca. 750 Lumen	Brightness LUX	ca. 1.500 Lux	Hours of use with EY 9L54 B (18V) [side surface]	ca. 7 Std. 20 Min.	Hours of use with EY 9L54 B (18V) [entire surface]	ca. 70 Std.	£75.00
Voltage	21,6 / 18 / 14,4 Volt																			
Battery capacity accord. to IEC	Depending on battery																			
Weight (excl. battery)	0,38 kg																			
Electric light bulb	LED																			
Brightness LUMEN	ca. 750 Lumen																			
Brightness LUX	ca. 1.500 Lux																			
Hours of use with EY 9L54 B (18V) [side surface]	ca. 7 Std. 20 Min.																			
Hours of use with EY 9L54 B (18V) [entire surface]	ca. 70 Std.																			
21,6 V / 18 V / 14,4 V		EY 37C5 B <ul style="list-style-type: none">■ Suitable for 21.6 / 18 / 14.4V Li-ion battery packs■ Lightweight at just 0.42kg (excl. battery pack)■ Hanging handle 360 rotation■ Mode (Input source) Bluetooth®■ USB socket 2 x Type A USB (DC5V) sockets for total 2A output■ Without battery and charger	<table><tr><td>Voltage</td><td>21,6 / 18 / 14,4 Volt</td></tr><tr><td>Battery capacity accord. to IEC</td><td>Depending on battery</td></tr><tr><td>Weight (excl. battery)</td><td>0,42 kg</td></tr><tr><td>Current</td><td>Practical maximum output (with 10% margin) 5W</td></tr><tr><td>Bluetooth®</td><td>Ver. 4.2, Class 2 (2.5mW), Estimated range ca. 10m, Pairings: 8 (max), Profile: A2DP, AVRCP</td></tr><tr><td>Hours of use with EY 9L54 B</td><td>ca. 28 Std.</td></tr></table>	Voltage	21,6 / 18 / 14,4 Volt	Battery capacity accord. to IEC	Depending on battery	Weight (excl. battery)	0,42 kg	Current	Practical maximum output (with 10% margin) 5W	Bluetooth®	Ver. 4.2, Class 2 (2.5mW), Estimated range ca. 10m, Pairings: 8 (max), Profile: A2DP, AVRCP	Hours of use with EY 9L54 B	ca. 28 Std.	£85.00				
Voltage	21,6 / 18 / 14,4 Volt																			
Battery capacity accord. to IEC	Depending on battery																			
Weight (excl. battery)	0,42 kg																			
Current	Practical maximum output (with 10% margin) 5W																			
Bluetooth®	Ver. 4.2, Class 2 (2.5mW), Estimated range ca. 10m, Pairings: 8 (max), Profile: A2DP, AVRCP																			
Hours of use with EY 9L54 B	ca. 28 Std.																			
18 V / 14,4 V		EY 37A2 B <ul style="list-style-type: none">■ Large diameter speakers for clear, dynamic sound■ Panasonic proprietary optimal tuning from low to high key■ Bluetooth® function■ Dynamic durability IP64 and tough protection cage■ Tone control settings■ FM/AM with 12 presets■ Handy LED light function	<table><tr><td>Power supply</td><td>Li-ion battery (14.4 –18V), AC adaptor</td></tr><tr><td>Mode</td><td>FM / AM / Bluetooth® / AUX-IN</td></tr><tr><td>Weight (excl. battery)</td><td>4.0kg</td></tr><tr><td>Frequency coverage</td><td>FM: 87.5–108MHz / AM: 522–1,629kHz</td></tr><tr><td>Dust / Water Protection</td><td>IP64 (Dustproof and splashproof) with tough protection cage</td></tr><tr><td>Operating time (18V / 14.4V)</td><td>4.2Ah (LS type): Approx. 24 hrs / 2.0Ah (LF type): Approx. 11 hrs</td></tr><tr><td>Size (LxHxW)</td><td>344 x 280 x 239mm</td></tr></table>	Power supply	Li-ion battery (14.4 –18V), AC adaptor	Mode	FM / AM / Bluetooth® / AUX-IN	Weight (excl. battery)	4.0kg	Frequency coverage	FM: 87.5–108MHz / AM: 522–1,629kHz	Dust / Water Protection	IP64 (Dustproof and splashproof) with tough protection cage	Operating time (18V / 14.4V)	4.2Ah (LS type): Approx. 24 hrs / 2.0Ah (LF type): Approx. 11 hrs	Size (LxHxW)	344 x 280 x 239mm	£225.00		
Power supply	Li-ion battery (14.4 –18V), AC adaptor																			
Mode	FM / AM / Bluetooth® / AUX-IN																			
Weight (excl. battery)	4.0kg																			
Frequency coverage	FM: 87.5–108MHz / AM: 522–1,629kHz																			
Dust / Water Protection	IP64 (Dustproof and splashproof) with tough protection cage																			
Operating time (18V / 14.4V)	4.2Ah (LS type): Approx. 24 hrs / 2.0Ah (LF type): Approx. 11 hrs																			
Size (LxHxW)	344 x 280 x 239mm																			





BATTERIES AND CHARGER

VOLTAGE (V) CAPACITY (Ah)	MODEL / FEATURES		RRP
28,8 V / 3,4 Ah	EY 9L84 B <ul style="list-style-type: none">■ Voltage 28.8V■ Battery capacity accord. to IEC (technology) 3.4Ah (Li-ion)		£169.00
21,6 V / 4,2 Ah	EY 9L62 B <ul style="list-style-type: none">■ Voltage 21.6V■ Battery capacity accord. to IEC (technology) 4.2Ah (Li-ion)		£149.00
18 V / 5,0 Ah	EY 9L54 B <ul style="list-style-type: none">■ Voltage 18V■ Battery capacity accord.to IEC (technology) 5.0Ah (Li-ion)		£119.00
18 V / 3,0 Ah	EY 9L53 B <ul style="list-style-type: none">■ Voltage 18V■ Battery capacity accord. to IEC (technology) 3.0Ah (Li-ion)		£99.00
18 V / 2,0 Ah	EY 9L52 B <ul style="list-style-type: none">■ Voltage 18V■ Battery capacity accord.to IEC (technology) 2.0Ah (Li-ion)		£89.00
14,4 V / 4,2 Ah	EY 9L45 B <ul style="list-style-type: none">■ Voltage 14.4V■ Battery capacity accord. to IEC (technology) 4.2Ah (Li-ion)		£119.00
14,4 V / 2,0 Ah	EY 9L47 B <ul style="list-style-type: none">■ Voltage 14.4V■ Battery capacity accord. to IEC (technology) 2.0Ah (Li-ion)		£75.00
10,8 V / 1,5 Ah	EY 9L32 B <ul style="list-style-type: none">■ Voltage 10.8V■ Battery capacity accord. to IEC (technology) 1.5Ah (Li-ion)		£65.00
3,6 V / 1,5 Ah	EY 9L10 B <ul style="list-style-type: none">■ Voltage 3.6V■ Battery capacity accord. to IEC (technology) 1.5Ah (Li-ion)		£29.00
7,2 V / 2,8 Ah	EY 9268 B <ul style="list-style-type: none">■ Voltage 7.2V■ Battery capacity accord. to IEC (technology) 2.8Ah (Ni-MH)		£53.00
2,4 V / 2,8 Ah	EY 9221 B <ul style="list-style-type: none">■ Voltage 2.4V■ Battery capacity accord. to IEC (technology) 2.8Ah (Ni-MH)		£22.00
	EY 0L82 B <ul style="list-style-type: none">■ 14.4 – 28.8V Quick charging system Incl. 14.4V / 1.5Ah for all Li-ion battery types		£69.00
	EY 0L32 B <ul style="list-style-type: none">■ 10.8V Charging system for EY 9L32 B		£65.00
	EY 0L11 B <ul style="list-style-type: none">■ 2.4 – 3.6V Quick charging system for Ni-MH- and Li-ion battery types (excl. EY 9021 B)		£55.00
	EY 0110 B <ul style="list-style-type: none">■ 7.2 – 24V Quick charging system for all Ni-Cd- and Ni-MH battery types		£75.00

BLADES

VOLTAGE (V) CAPACITY (AH)	MODEL / FEATURES		RRP
	EY 9 PW 13 C <ul style="list-style-type: none">135mm diameter Carbide-tipped blade for wood24 tooth count for EY 3503, EY 45A2 and EY 4542		£42.00
	EY 9 PW 13 D <ul style="list-style-type: none">135mm diameter Carbide-tipped blade for wood48 tooth count for EY 3503, EY 45A2 and EY 4542		£46.00
	EY 9 PM 13 E <ul style="list-style-type: none">135mm diameter Metal saw blade30 tooth count for EY 3503, EY 45A2 and EY 4542		£42.00
	EY 9 PM 13 F <ul style="list-style-type: none">135mm diameter Metal saw blade50 tooth count for EY 3503, EY 45A2 and EY 4542		£46.00
	EY 9 PG 11 A <ul style="list-style-type: none">110mm diameter Diamond weelCutting glass and tiles for EY 3550		£55.00
	EY 9 SXMJ 4 E <ul style="list-style-type: none">18 teeth Bandsaw genuine bladeFor EY 45A5		£49.00

DRILL CHUCKS AND OTHER ACCESSORIES

VOLTAGE (V) CAPACITY (AH)	MODEL / FEATURES		RRP
	EY 9 HX 413 E <ul style="list-style-type: none">13mm ChuckFor EY 74A2 / EY 79A2		£35.00
	EY 9 HX 414 E <ul style="list-style-type: none">13mm ChuckFor EY 74A3		£35.00
	EY 9 HX 415 E <ul style="list-style-type: none">13mm ChuckFor EY 79A3		£35.00
	EY 9 HX 111 E <ul style="list-style-type: none">13mm ChuckFor EY 7549		£29.00
	EY 9 HX 131 E <ul style="list-style-type: none">1/4" hex quick change chuckFor EY 75A8		£19.00
	EY 9HX 400 E <ul style="list-style-type: none">Dust extraction system suitable for EY 78810.9 kg, dust box capacity about 270ml		£99.00
	EY 9 X 401 E <ul style="list-style-type: none">Horizontal level attachmentFor EY 7881		£19.00
	WEY 7881 K 3038 <ul style="list-style-type: none">Dust sealing capFor EY 7881		£15.00
	WEY 7881 L 0247 <ul style="list-style-type: none">Dust filterFor EY 7881		£8.00
	WEY 7881 K 3187 <ul style="list-style-type: none">Dust sealing capFor EY 7881		£5.00

DRILL CHUCKS AND OTHER ACCESSORIES

VOLTAGE (V) CAPACITY (AH)	MODEL / FEATURES		RRP
	EY 9 X 004 E <ul style="list-style-type: none">Dust collection cupFor EY 6813 and EY 7880		£17.00
	EY 9 X 005 E <ul style="list-style-type: none">Dust collection cupFor EY 7840 and EY 78A1		£17.00
	EY 9 X 008 E <ul style="list-style-type: none">Adapter for foil packsFor EY 3654		£9.00
	EY 9 X 012 E <ul style="list-style-type: none">Hose adapterFor EY 4542 and EY45A2		£9.00
	EY 9 X 013 E <ul style="list-style-type: none">PlungerFor EY 3640 / EY 3641 / EY 3610		£9.00
	EY 9 X 016 E <ul style="list-style-type: none">Dust adapter jigsawFor EY 4550		£9.00
	EY 9 X 017 E <ul style="list-style-type: none">Cartridge plungerAdaptor for 3.6V sealing gun		£9.00
	WEY 6470 K 3217 <ul style="list-style-type: none">Support HandleFor EY 74A3		£14.00
	WEY 37A3 L 0247 <ul style="list-style-type: none">Dust filterFor EY 37A3		£20.00
	WEY 37A3 W 3037 <ul style="list-style-type: none">Filter gridFor EY 37A3		£6.00
	WEY 3780 L 0138 <ul style="list-style-type: none">Protection filterFor EY 37A3		£4.00
	WEY 37A3 K 7307 <ul style="list-style-type: none">Extension pipeFor EY 37A3		£15.00
	WEY 3782 K 7617 <ul style="list-style-type: none">Floor brushFor EY 37A3		£29.00
	WEY 37A3 K 7557 <ul style="list-style-type: none">Crevice nozzleFor EY 37A3		£7.00
	SYSTAINER T-LOC 4DD / 4SAW / RH <ul style="list-style-type: none">Stackable transport box with inlay		£49.00
	SYSTAINER T-LOC 3 MIDI <ul style="list-style-type: none">Stackable transport box with inlay for Cordless Reciprocating Saw and Cordless Band Saw		£59.00
	SYSTAINER T-LOC 2 <ul style="list-style-type: none">Stackable transport box with inlay for EY79A2/EY74A2/EY75A2/EY75A7/EY7552 u.v.m.		£35.00
	TOOL BS4A <ul style="list-style-type: none">25-part Bitsetcolor-coded bits made of high-quality S2 steel		£18.00
	TOOL BS3A <ul style="list-style-type: none">71-part Bitsetcolor-coded bits made of high-quality S2 steel		£25.00

Panasonic®

Panasonic Power Tools

Panasonic Electric Works Europe AG
Robert Koch Strasse 100
85521 Ottobrunn

Panasonic Electric Works Europe AG

The design and specification of products are constantly changing in the interest of improvement. Whilst every care has been taken in preparation of this catalogue, some changes may not have been indicated and may have occurred after publication. Please check with your Panasonic dealer for details. Panasonic Electric Works Europe AG cannot accept responsibility for any errors and omissions.

Produced in Germany 02/2020

© 2020 Panasonic Electric Works Europe AG

DEALER'S STAMP

www.panasonic-powertools.eu