



DEMAND THE **BEST**

THE MEXCO CUTTING AND DRILLING CATALOGUE

TOOLBANK

THE MEXCO CUTTING AND DRILLING CATALOGUE



FIVE STAR ★★★★★
CUSTOMER SERVICE



OVER 11 MILLION
**DIAMOND TOOLS
SOLD**



FULL TECHNICAL
SUPPORT



THE
LEARNING HUB



MEXCO BLADE
RANGE
PAGES 8 - 39

MEXCO CORE
RANGE
PAGES 40 - 51

MEXCO TILE
RANGE
PAGES 52 - 54

Diamond Blades 8

Ultra Hard Materials	10
Ceramic Range	11
Hard Materials	12
Dual Purpose Turbo	13
General Purpose	14-18
Abrasive Materials	19-20
Tri-Purpose	21-22
Dual Purpose-Abrasive	23
Asphalt	24-25

Specialist Blades 26

Radius Blade	28
Flush Cut Blade	29
Universal	30
Mortar Rakers	31
Cup Grinders	32
Looping/Slot Cutting Blades	33
Fibre Cement Board	34
Wood Cut Blade	35
Metal Cut Blade	36
Abrasive Wheels	37
Profile Wheel	38
Triple Pack	39

Diamond Core Drills 40

Dry Core Drills	42-45
Laser Welded Dry Core Drills	46-49
Dry Core Drill Accessories	50
Wet Core Drills and Accessories	51

Diamond Tile Drills 52

Tile Drill Overview	52
Tile Drill Bits and Accessories	53
Tile Drill Kits and Accessories	54

Holesaws 55

Water Bottles 57

Supplementary Items 58




UNDERSTANDING DIAMOND BLADE SEGMENTS

Different diamond blades are designed to cut different materials. This is because materials vary in their make-up and densities. Material hardness or density is expressed in kilonewtons (kN). The recipe used to create a diamond segment bond varies depending on the material the blades are designed to cut.

HIGH DENSITY (HARD) MATERIALS

Granite is a good example of a material with a high kilonewton (kN) rating. In the case of high density engineered items such as porcelain, the products used to make the material are compressed tightly together before being heated and glazed. This all adds to the density of the material.




LOW DENSITY (SOFT) MATERIALS

Asphalt or concrete breeze blocks are good examples of a material that has a lower kilonewton (kN) rating.



A high density material will require a soft segment bond, a medium density material will require a medium segment bond and a low density material will require a hard segment bond. This ensures the right amount of segment wear to keep the blade cutting and lasting to its ultimate lifetime. Not having the correct blade for the application will affect the blade's cutting performance and lifetime.



DUAL OR TRI PURPOSE BLADES

Where a Dual or Tri-Purpose diamond blade is required, alternating diamond segment bonds are used within the segment configuration. These blades will have a reduced lifetime over a blade designed to work within a specific material density.

DIAMOND BLADE APPLICATION CHART

KEY
● **RECOMMENDED** to cut these materials
● **Will cut these materials** possibility of reduced lifetime / glazing
● **NOT Recommended** to cut these materials

MATERIAL HARDNESS (Density kN)


DIAMOND BLADE	DIAMOND SEGMENT BOND									
	ULTRA HARD MATERIALS	CERAMIC	HARD MATERIALS	DUAL PURPOSE TURBO	GENERAL PURPOSE CONCRETE	ABRASIVE MATERIALS	ASPHALT	DUAL PURPOSE	SOFT / MEDIUM / HARD BOND	SOFT / MEDIUM / HARD BOND
HARD (High Density)										
PORCELAIN	●	●	●	●	●	●	●	●	●	●
HARD MARBLE	●	●	●	●	●	●	●	●	●	●
MARBLE TILES	●	●	●	●	●	●	●	●	●	●
CERAMIC TILES	●	●	●	●	●	●	●	●	●	●
DUCTILE IRON	●	●	●	●	●	●	●	●	●	●
GRANITE	●	●	●	●	●	●	●	●	●	●
CLASS A ENGINEERING BRICK	●	●	●	●	●	●	●	●	●	●
CLAY PAVIOURS	●	●	●	●	●	●	●	●	●	●
CLAY PIPES VITRIFIED	●	●	●	●	●	●	●	●	●	●
CLAY ROOF TILES	●	●	●	●	●	●	●	●	●	●
QUARRY TILES	●	●	●	●	●	●	●	●	●	●
NON ABRASIVE INDIAN SANDSTONE	●	●	●	●	●	●	●	●	●	●
HARD FACING BRICK	●	●	●	●	●	●	●	●	●	●
MEDIUM FACING BRICK	●	●	●	●	●	●	●	●	●	●
HARD SLATE	●	●	●	●	●	●	●	●	●	●
MEDIUM (Medium Density)										
RIVER GRAVEL AGGREGATE CONCRETE	●	●	●	●	●	●	●	●	●	●
FLINT AGGREGATE CONCRETE	●	●	●	●	●	●	●	●	●	●
REINFORCED CONCRETE	●	●	●	●	●	●	●	●	●	●
CONCRETE KERBS	●	●	●	●	●	●	●	●	●	●
CONCRETE SLABS	●	●	●	●	●	●	●	●	●	●
REINFORCED LINTELS	●	●	●	●	●	●	●	●	●	●
HARD LIMESTONE	●	●	●	●	●	●	●	●	●	●
LIMESTONE AGGREGATE CONCRETE	●	●	●	●	●	●	●	●	●	●
CONCRETE PAVIOURS	●	●	●	●	●	●	●	●	●	●
SOFT FACING BRICK	●	●	●	●	●	●	●	●	●	●
CONCRETE BLOCKS OVER 15KN	●	●	●	●	●	●	●	●	●	●
HARD SANDSTONE	●	●	●	●	●	●	●	●	●	●
SOFT SLATE	●	●	●	●	●	●	●	●	●	●
MEDIUM SANDSTONE	●	●	●	●	●	●	●	●	●	●
CONCRETE ROOF TILES	●	●	●	●	●	●	●	●	●	●
CONCRETE WITH MED SHARP SAND	●	●	●	●	●	●	●	●	●	●
COARSE SANDSTONE	●	●	●	●	●	●	●	●	●	●
BREEZE BLOCK	●	●	●	●	●	●	●	●	●	●
SHALLOW CONCRETE SCREED	●	●	●	●	●	●	●	●	●	●
ASPHALT OVER CONCRETE	●	●	●	●	●	●	●	●	●	●
CONCRETE BLOCK UNDER 15KN	●	●	●	●	●	●	●	●	●	●
GREEN CONCRETE	●	●	●	●	●	●	●	●	●	●
LIGNACITE BLOCKS	●	●	●	●	●	●	●	●	●	●
ASPHALT	●	●	●	●	●	●	●	●	●	●
SOFT (Low Density)										

DIAMOND TOOL GRADING TABLE



ENTRY LEVEL RANGE

All round good performance at a lower purchase cost



ENTRY LEVEL SYNTHETIC DIAMONDS


- Irregular crystal shapes
- Shorter cutting rates
- Medium thermal stability
- Jagged points that fracture quicker than more regular shaped diamond crystals

Usually found in Entry Level Diamond Tools



MID LEVEL RANGE

Excellent wear characteristics, life time and a faster speed of cut



MID QUALITY SYNTHETIC DIAMONDS


- Good crystal strength and shape
- Fast cutting speed
- Good for sawing and drilling applications
- Handles moderate steel and hard aggregate applications

Usually found in Mid Level Diamond Tools



TOP LEVEL RANGE

Fantastic cutting speeds and wear characteristics resulting in an optimum cost per cut



TOP QUALITY SYNTHETIC DIAMONDS

- Octahedral shape, strongest crystals
- Increased tool life and faster cutting
- Withstands high temperatures
- High impact strength against steel and hard aggregate

Usually found in Top Level Diamond Tools

IDENTIFYING THE REQUIREMENTS OF YOUR CUSTOMERS

1

MATERIAL?



Ask: What materials are you cutting?

Use the diamond blade application chart to determine what range of applications best suit your customers cutting requirements.

Top tip: A common misconception is that a general purpose concrete diamond blade will perform well in all types of concrete. Unfortunately, in some situations this is not the case as the abrasive characteristics of an aerated piece of concrete such as concrete blocks or concrete roof tiles reduce segment life expectancy and would be better suited to a harder bond abrasive concrete segment such as a blade from the TPX, DPX or ABX ranges.

2

MACHINE?



Ask: What machine are you using?

What machine is your customer using and what bore size does it have? The following size diameter blades use the following bore sizes on the most common machines (older cutting machinery tended to have alternative bore sizes so it is worth checking):

Diamond Blade Bore Size Guide

Blade Diameter	Bore Size
4" (100mm)	= 16mm
4.5" - 9" (115-230mm)	= 22.23mm
12" (300-305mm)	= 20mm
14" - 18" (350-450mm)	= 25.4mm

(some larger handheld disc cutters require a 20mm bore)
This table should only be used as a basic guide. If you are unsure of the correct bore size you should refer to the machines operator manual.

3

LIFESPAN?



Ask: How much cutting work do you have in this material? Is the cost per cut or initial purchase price more important to you?

The initial purchase price is obviously a very important factor when investing in a diamond blade. The initial cost can be understandably misleading due to the majority of diamond blades looking the same... so, the justification to purchase the more expensive product is difficult for a customer to quantify.

As you would expect the grade of segments used directly influences the lifetime and speed of cut thus providing a better cost per cut ratio on the more expensive products. If your customer has an ongoing requirement to cut the same product they will receive a better return from their original investment by opting for the more expensive higher grade diamond blades.



DIAMOND BLADE RANGE



SEE OUR
PRODUCTS
ON **YouTube**

www.mexco.co.uk

DIAMOND CUTTING AND DRILLING TOOLS

DIAMOND BLADES

RANGE


DEFINITION

PAGE LOCATION



UH ULTRA HARD MATERIALS

The UHX range of diamond blades have been developed to enable the fast cutting of hard natural stone products and engineered fired materials such as porcelain and harder ceramic products.



Porcelain Granite Brick

PAGE 10



CM CERAMIC MATERIALS

The CMX range of continuous rim diamond blades have been developed to cut quickly and cleanly through medium density ceramic floor and wall tiles.



Ceramic

PAGE 11



HM HARD MATERIALS

These blades have been engineered to cut the hardest of materials. The soft bond matrix allows new diamond grit to be exposed quicker, enhancing cutting characteristics in hard dense products.




Granite Clay Tiles Brick

PAGE 12



DT DUAL PURPOSE TURBO

The DTX range gives the user the ability to cut a variety of materials within a specific range. These diamond blades offer more versatility when the user is regularly cutting hard – medium density materials.



Clay Tiles Brick Reinforced Concrete

PAGE 13



GP GENERAL PURPOSE

The GPX blade is most suited to cutting products constructed using sand, cement and aggregate. In addition, these blades are designed to deal with the stresses of cutting reinforced concrete products.




Hard Concrete Reinforced Concrete Concrete Slabs

from
PAGE 14



AB ABRASIVE MATERIALS

The ABX range of diamond blades are designed for cutting abrasive applications such as sand stone, concrete roof tiles, soft concrete pavements and concrete blocks.



Concrete Blocks Concrete Roof Tiles Soft Slate

from
PAGE 19



TP TRI PURPOSE

The TPX range of blades have been designed to give the user the versatility to cut a wider variety of materials without the need to change blades every time the material being cut changes.



Reinforced Concrete Concrete Blocks Asphalt

from
PAGE 21



DP DUAL PURPOSE

The DPX range gives the user the ability to cut a variety of materials within a specific range, offering more versatility when the contractor is regularly cutting medium – low density abrasive materials.




Concrete Slabs Concrete Blocks Asphalt

PAGE 23



AS ASPHALT

The ASX range of diamond blades offer fast stock removal and a good lifetime when used for cutting the most abrasive of applications such as asphalt, green concrete and cement screed.



Concrete Roof Tiles Green Concrete Asphalt

from
PAGE 24

The UHX - Ultra Hard Materials diamond blade range has been developed to offer fast cutting of hard natural stone products and engineered fired materials such as porcelain and ceramic products. The performance of this blade can be attributed to its ultra thin castellated design turbo segment enabling not only fantastic cutting performance but also a super clean cut with a huge reduction in chipping.

Advisory: Maximum recommended cutting depth: 20mm

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



PORCELAIN GRANITE BRICK


APPLICATIONS:

- Porcelain
- Hard Marble
- Marble Tiles
- Ceramic Tiles
- Ductile Iron
- Granite
- Class A Engineering Bricks
- Clay Paviments
- Clay Pipes Vitrified
- Clay Roof Tiles
- Quarry Tiles
- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate

UHX UHXCEL GRADE
ULTRA HARD MATERIALS



Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXUHXL115	115	1.2	22.23	35.00
MEXUHXL125	125	1.2	22.23	39.00
MEXUHXL150	150	1.4	22.23	70.47
MEXUHXL180	180	1.4	22.23	77.40
MEXUHXL180S	180	1.4	25.40	77.40
MEXUHXL200	200	1.4	22.23	99.58
MEXUHXL200S	200	1.4	25.40	99.58
MEXUHXL230	230	1.6	22.23	91.36
MEXUHXL230S	230	1.6	25.40	91.36
MEXUHXL250S	250	1.6	25.40	129.00
MEXUHXL30020	300	2.0	20.00	144.54
MEXUHXL3502S	350	2.0	25.40	269.66
MEXUHXL400S	400	3.0	25.40	380.75



10MM SEGMENT HEIGHT



- ▶ **Segment:** Ultra thin
- ▶ **Segment Type:** Continuous Turbo
- ▶ **Segment Attachment:** Sintered
- ▶ **Usage:** Can be used dry - Wet cut advised on diameters above 150mm
- ▶ **Ventilation:** Yes

UHX UHXCEL+ GRADE
ULTRA HARD MATERIALS


Designed for fast, clean cutting with reduced chipping



* Reinforced steel flange **Bench saw / Table saw

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXUHXL115T	115	1.2	22.23	82.90
MEXUHXL125T	125	1.2	22.23	89.29
MEXUHXL200T **	200	1.4	22.23	147.81
MEXUHXL230T *	230	1.6	22.23	163.17
MEXUHXL230ST **	230	1.6	25.40	163.17
MEXUHXL250ST **	250	1.6	25.40	260.29
MEXUHXL350ST **	350	2.0	25.40	387.64

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXUHXL115BA	115	1.2	22.23	38.95




10MM SEGMENT HEIGHT

CM CMX90 GRADE
CERAMIC MATERIALS



REDUCED CHIPPING AND FAST CUTTING



HIGH DIAMOND CONCENTRATION

- ▶ **Segment:** 8mm
- ▶ **Segment Type:** Continuous
- ▶ **Segment Attachment:** Sintered
- ▶ **Usage:** Wet or Dry - Wet cut advised on diameters above 150mm
- ▶ **Ventilation:** No



Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXCMX90105	105	1.9	16.00	14.94
MEXCMX90115	115	1.8	22.23	14.94
MEXCMX90125	125	2.0	22.23	15.94
MEXCMX90180	180	2.0	22.23	31.88
MEXCMX90180S	180	2.0	25.40	31.88
MEXCMX90200	200	2.0	22.23	40.82
MEXCMX90200S	200	2.0	25.40	40.82
MEXCMX90230	230	2.0	22.23	45.92
MEXCMX90300S	300	3.0	25.40	142.58
MEXCMX90350S	350	3.0	25.40	167.94

The CMX - Ceramic Materials diamond blade has been developed with a continuous rim segment to cut ceramic tiles quickly and cleanly. The performance of this product can be attributed to its high diamond concentration allowing a large amount of diamond grit to be exposed at all times, producing a fast accurate clean cut.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.




Typical Mexco Diamond Blade Product Packaging



CERAMIC TILES

APPLICATIONS:

- Ceramic Tiles
- Marble Tiles

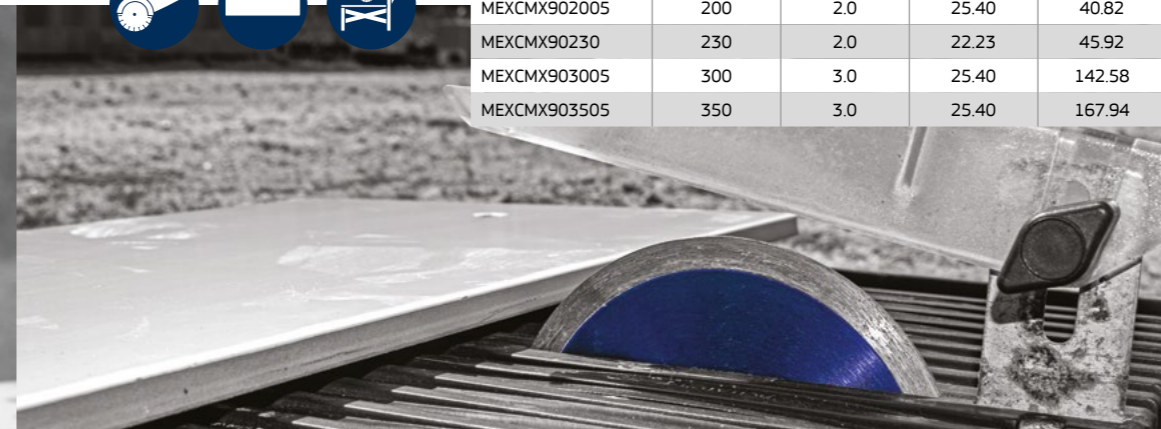

The performance of the HMX – Hard Materials diamond blade can be attributed to its narrow gullet design and soft bond matrix allowing new diamond grit to be exposed quicker, enhancing cutting characteristics in hard dense products.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:

- Granite
- Class A Engineering Brick
- Clay Paviours
- Clay Pipes Vitrified
- Clay Roof Tiles
- Quarry Tiles
- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs



HM XCEL GRADE
HM
HARD MATERIALS
★★★★★

10MM SEGMENT HEIGHT


ANTI CHIPPING NARROW GULLET

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXHMXL115	115	2.4	22.23	45.92
MEXHMXL125	125	2.4	22.23	56.12
MEXHMXL230	230	2.6	22.23	80.90
MEXHMXL300	300	3.2	20.00	210.46
MEXHMXL350	350	3.2	20.00	286.97
MEXHMXL3505	350	3.2	25.40	286.97
MEXHMXL400	400	3.2	20.00	348.20
MEXHMXL4005	400	3.2	25.40	348.20
MEXHMXL4505	450	3.2	25.40	412.77

- ▶ Segment: 10mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Laser Welded
- ▶ Gullet: Narrow
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No



DT DT XCEL GRADE
DUAL PURPOSE TURBO
★★★★★

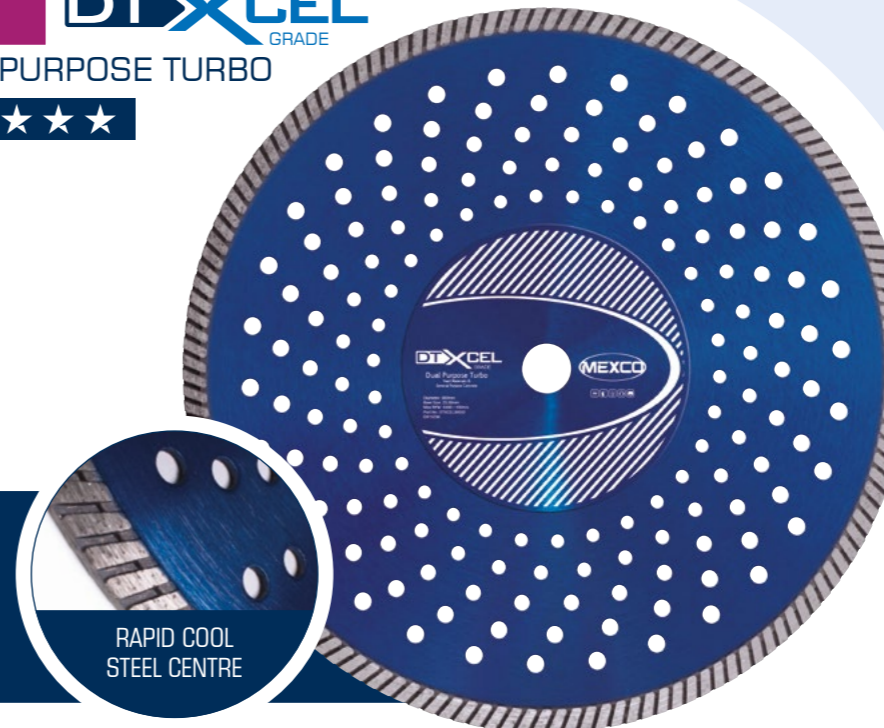

RAPID COOL STEEL CENTRE

FAST CUT TURBO SEGMENT

- ▶ Segment: 9mm
- ▶ Segment Type: Continuous Turbo
- ▶ Segment Attachment: Sintered
- ▶ Gullet: None
- ▶ Usage: Wet or Dry
- ▶ Ventilation: Yes



Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXDTXL11522	115	2.4	22.23	42.30
MEXDTXL12522	125	2.4	22.23	50.95
MEXDTXL18022	180	2.4	22.23	73.48
MEXDTXL23022	230	3.2	22.23	76.32
MEXDTXL30020	300	3.2	20.00	210.46
MEXDTXL35020	350	3.2	20.00	225.00
MEXDTXL35025	350	3.2	25.40	225.00

The DTX – Dual Purpose Turbo diamond blade is recommended for the contractor cutting a wide range of non-abrasive building products. The DTX produces an excellent speed of cut in applications ranging from hard materials to non-abrasive building materials, whilst incorporating an anti-chipping continuous rim segment.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:

- Ductile Iron
- Granite
- Class A Engineering Brick
- Clay Paviours
- Clay Pipes Vitrified
- Clay Roof Tiles
- Quarry Tiles
- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Paviours
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone
- Soft Slate
- Medium Sandstone

The GPX – General Purpose Concrete diamond blade provides the user with excellent cutting characteristics in the majority of non-abrasive concrete construction materials used in the UK.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.




Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:


- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Paviments
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone

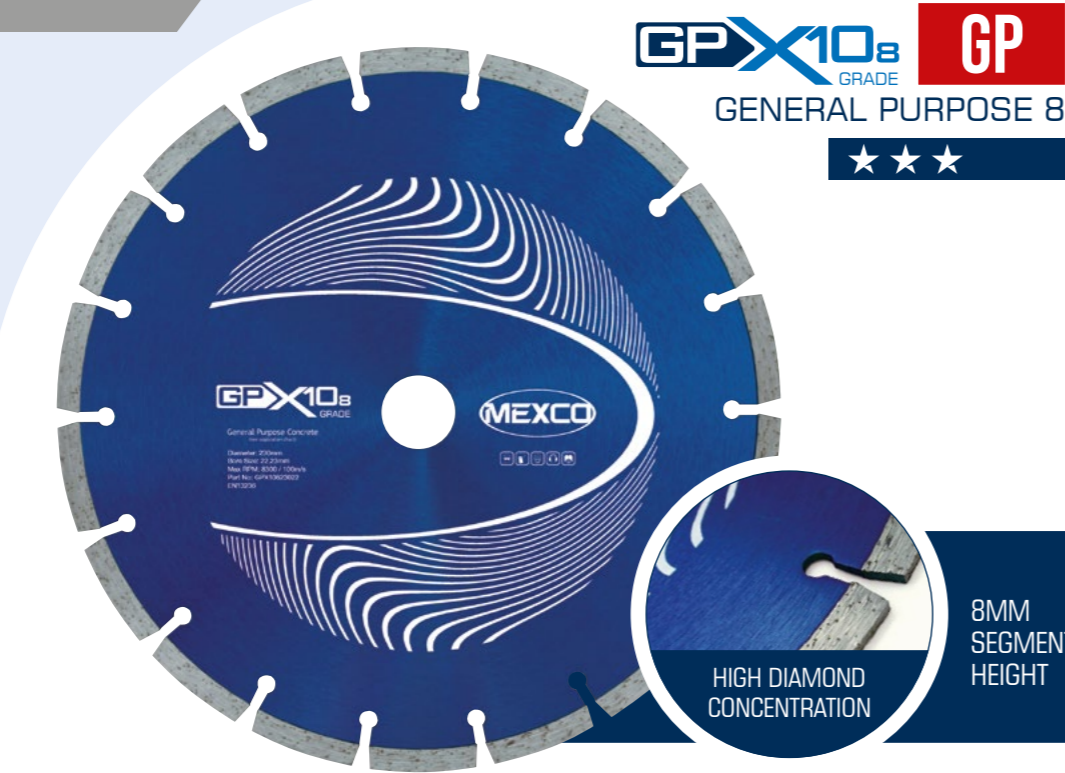

GPX10₈ **GP**
GRADE
GENERAL PURPOSE 8
★ ★ ★

HIGH DIAMOND CONCENTRATION

8MM SEGMENT HEIGHT

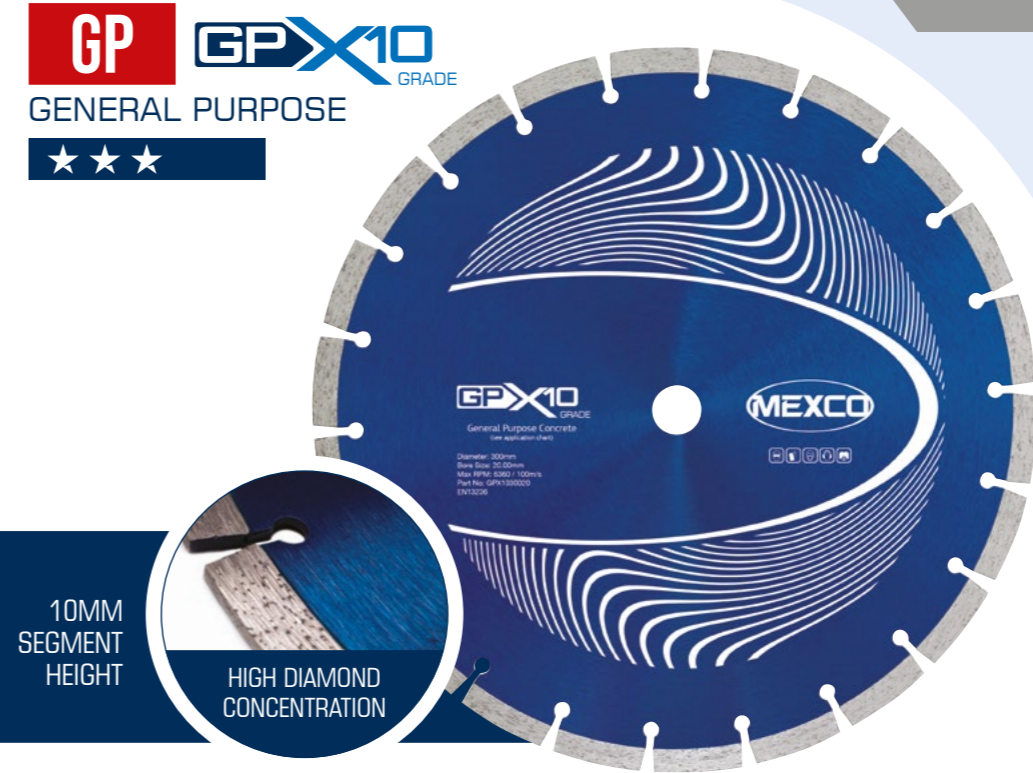

GP **GPX10**
GRADE
GENERAL PURPOSE
★ ★ ★

HIGH DIAMOND CONCENTRATION

10MM SEGMENT HEIGHT

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXGPX108115	115	2.0	22.23	8.30
MEXGPX108125	125	2.0	22.23	10.38
MEXGPX108230	230	2.8	22.23	25.50
MEXGPX108300	300	3.2	20.00	46.10

- ▶ Segment: 8mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Sintered
- ▶ Gullet: Narrow Keyhole
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No



Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXGPX10105	105	2.0	16.00	10.20
MEXGPX10115	115	2.0	22.23	10.20
MEXGPX10125	125	2.2	22.23	11.43
MEXGPX10180	180	2.4	22.23	16.74
MEXGPX101805	180	2.4	25.40	16.74
MEXGPX10230	230	2.8	22.23	35.08
MEXGPX10300	300	3.2	20.00	51.00
MEXGPX103002	300	3.2	22.23	59.32
MEXGPX10350	350	3.2	20.00	79.40
MEXGPX103505	350	3.2	25.40	79.40

- ▶ Segment: 10mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Sintered
- ▶ Gullet: Narrow Keyhole
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No



The GPX10 offers a cost effective solution for the user who requires a diamond blade that can cope with the cutting of the most widely used non-abrasive building materials.

With over one million GPX10's sold, this diamond blade remains a firm favourite for cost, speed and lifetime.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:

- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Paviments
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone

The GPX – General Purpose Concrete diamond blade provides the user with excellent cutting characteristics in the majority of non-abrasive concrete construction materials used in the UK.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:


- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Pavements
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone

GP GPX10T GRADE
GENERAL PURPOSE TURBO



★ ★ ★

ANGLE GRINDER DISC CUTTER BENCH SAW




10MM SEGMENT HEIGHT

CONTINUOUS CASTELLATED TURBO RIM

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXGPX10T115	115	2.0	22.23	10.20
MEXGPX10T125	125	2.0	22.23	11.40
MEXGPX10T230	230	3.0	22.23	35.08
MEXGPX10T300	300	3.2	20.00	59.32


- ▶ Segment: 10mm
- ▶ Segment Type: Continuous Turbo
- ▶ Segment Attachment: Sintered
- ▶ Gullet: None
- ▶ Usage: Wet or Dry
- ▶ Ventilation: Yes

GP GPX1015 GRADE
GENERAL PURPOSE 15

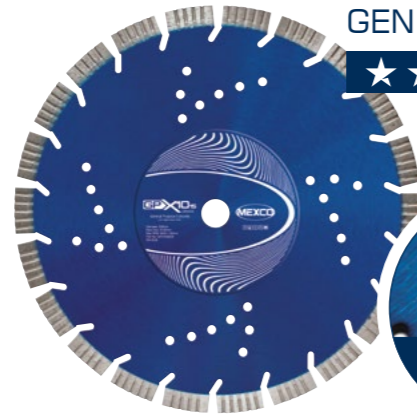

★ ★ ★

ANGLE GRINDER DISC CUTTER BENCH SAW FLOOR SAW



15MM SEGMENT HEIGHT



HEAT DISSIPATION COOLING HOLES

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXGPX15115	115	3.2	22.23	19.07
MEXGPX15125	125	3.2	22.23	21.32
MEXGPX15230	230	3.2	22.23	50.51
MEXGPX15300	300	3.2	20.00	73.01
MEXGPX15350	350	3.4	20.00	110.85
MEXGPX15350S	350	3.4	25.40	110.85

- ▶ Segment: 15mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Sintered
- ▶ Gullet: Angled
- ▶ Usage: Wet or Dry
- ▶ Ventilation: Yes

GP GPX90 GRADE
GENERAL PURPOSE

★ ★ ★ ★

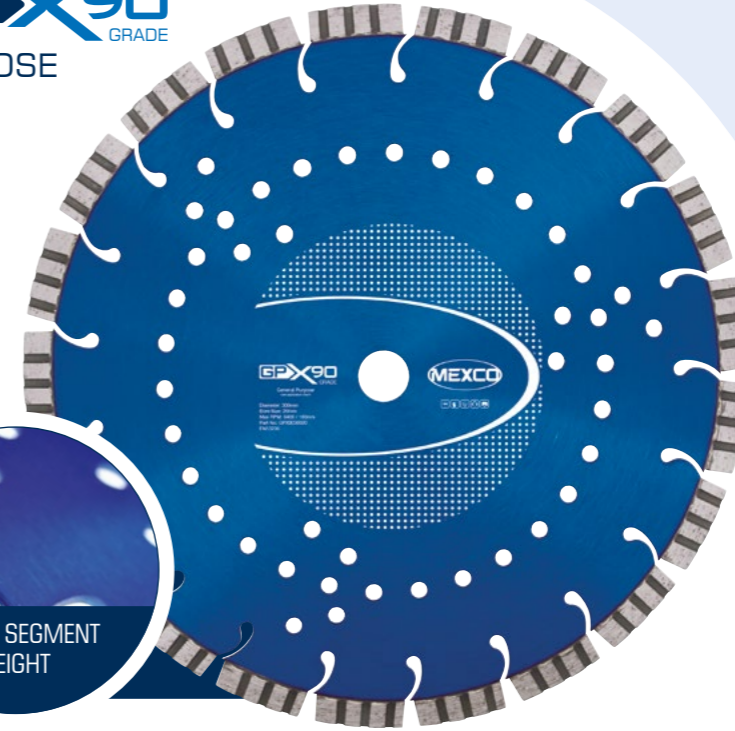

10MM SEGMENT HEIGHT

HEAT DISSIPATION COOLING HOLES

- ▶ Segment: 10 / *12mm on 300 Dia
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Laser Welded
- ▶ Gullet: Tear Drop
- ▶ Usage: Wet or Dry
- ▶ Ventilation: Yes

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXGPX90115	115	2.0	22.23	38.26
MEXGPX90125	125	2.0	22.23	42.39
MEXGPX90180	180	2.4	22.23	54.13
MEXGPX90230	230	2.4	22.23	81.02
MEXGPX90300 *	300	3.2	20.00	136.77
MEXGPX90350	350	3.2	20.00	204.08
MEXGPX90350S	350	3.2	25.40	204.08
MEXGPX90400	400	3.4	20.00	293.34
MEXGPX90400S	400	3.4	25.40	293.34
MEXGPX90450S	450	3.6	25.40	344.38
MEXGPX90500	500	4.0	25.40	474.50
MEXGPX90600	600	4.7	25.40	566.93



The GPX – General Purpose Concrete diamond blade provides the user with excellent cutting characteristics in the majority of non-abrasive concrete construction materials used in the UK.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:

- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Pavements
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone



The GPX – General Purpose Concrete diamond blade provides the user with excellent cutting characteristics in the majority of non-abrasive concrete construction materials used in the UK.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.




Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:

- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Paviours
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone

GPXCEL **GP**
GRADE
GENERAL PURPOSE
★★★★★

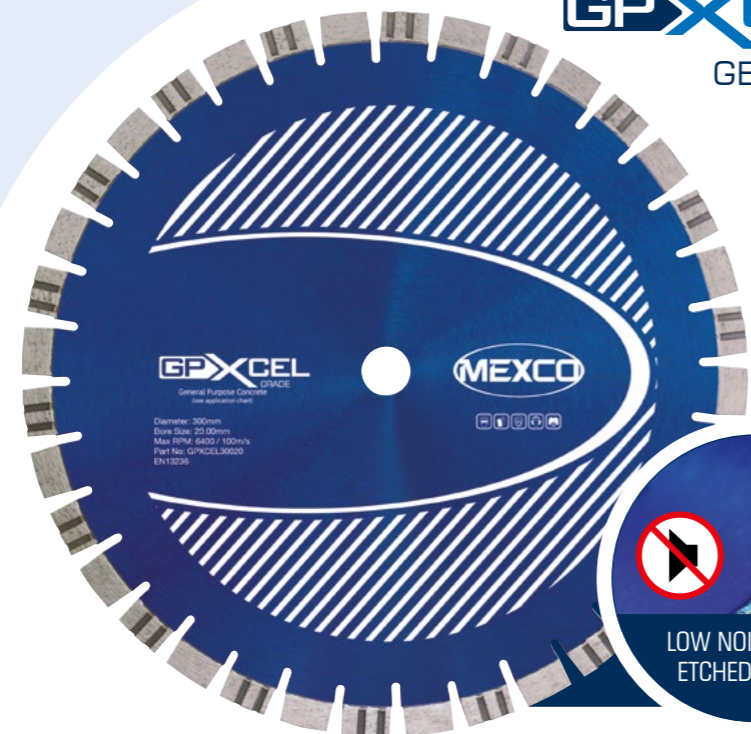

GPXCEL **MEXCO**
General Purpose Concrete
See application chart


Diameter: 300mm
Bore Size: 22.23mm
Max RPM: 6400 / 1500m/s
Part No: GPXCEL30020
EN13236



LOW NOISE LASER ETCHED CENTRE

ALTERNATE CASTELLATED SEGMENTS

AB **ABX10**
GRADE
ABRASIVE MATERIALS
★★★

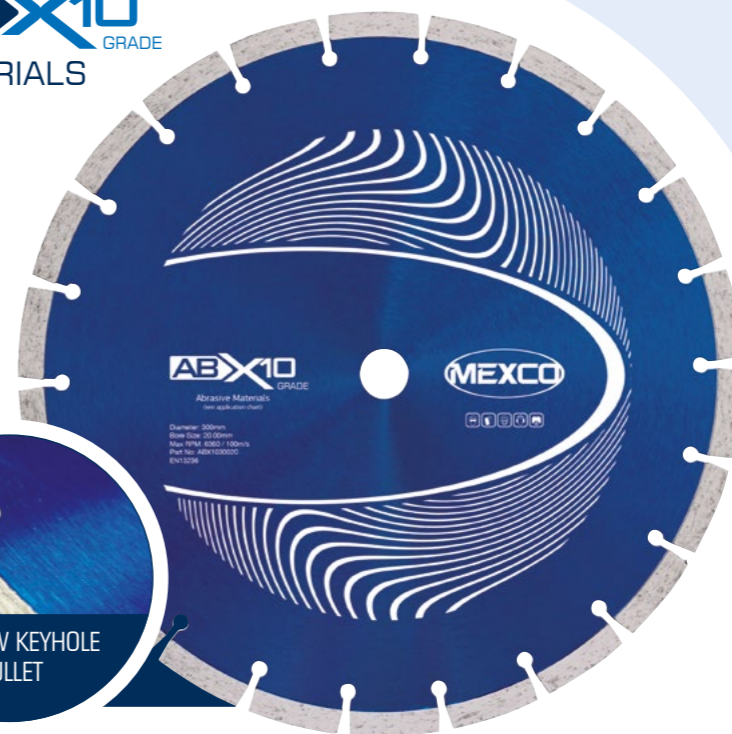

ABX10 **MEXCO**
Abrasive Materials
See application chart

Diameter: 300mm
Bore Size: 22.23mm
Max RPM: 6200 / 1500m/s
Part No: ABX103000
EN13236



NARROW KEYHOLE GULLET

10MM SEGMENT HEIGHT

The ABX – Abrasive Materials diamond blade range offers the user extended product lifetime when cutting abrasive building materials like medium density concrete blocks and lignacite products due to its harder segment bond.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:

- Concrete Paviours
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone
- Soft Slate
- Medium Sandstone
- Concrete Roof Tiles
- Concrete With Med Sharp Sand
- Coarse Sandstone
- Breeze Block
- Shallow Concrete Screed
- Asphalt Over Concrete
- Concrete Block Under 15kn
- Green Concrete

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXGPXL18022	180	2.6	22.23	124.93
MEXGPXL23022	230	2.6	22.23	145.00
MEXGPXL25025	250	3.0	25.40	147.00
MEXGPXL30020	300	3.2	20.00	210.46
MEXGPXL35020	350	3.2	20.00	286.97
MEXGPXL35025	350	3.2	25.40	286.97
MEXGPXL40020	400	3.6	20.00	348.20
MEXGPXL40025	400	3.6	25.40	348.20

- ▶ Segment: 12mm
- ▶ Segment Type: Alternate Castellation
- ▶ Segment Attachment: Laser Welded
- ▶ Gullet: Medium Gullet
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No



- ▶ Segment: 10mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Sintered
- ▶ Gullet: Narrow Keyhole
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No



Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXABX10115	115	2.0	22.23	11.40
MEXABX10125	125	2.2	22.23	11.62
MEXABX10230	230	2.8	22.23	39.27
MEXABX10300	300	3.2	20.00	66.53

The ABX - Abrasive Materials diamond blade range offers the user extended product lifetime when cutting abrasive building materials like medium density concrete blocks and lignacite products due to its harder segment bond.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



CONCRETE BLOCK CONCRETE ROOF TILES SOFT SLATE

APPLICATIONS:

- Concrete Pavours
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone
- Soft Slate
- Medium Sandstone
- Concrete Roof Tiles
- Concrete With Med Sharp Sand
- Coarse Sandstone
- Breeze Block
- Shallow Concrete Screed
- Asphalt Over Concrete
- Concrete Block Under 15kn
- Green Concrete


ABX90 **AB**
GRADE
ABRASIVE MATERIALS
★★★★



NARROW KEYHOLE GULLET

10MM SEGMENT HEIGHT

TP **TPX90**
GRADE
TRI-PURPOSE
★★★★



12MM SEGMENT HEIGHT

DEEP DRAFT UNDER CUTTING PROTECTION

The TPX - Tri-Purpose diamond blade ensures that you have the correct diamond blade for the most common applications already mounted on your saw. The narrow gullets and 12mm diamond segments ensure a clean finish and fast stock removal when cutting hard materials.



Typical Mexco Diamond Blade Product Packaging



REINFORCED CONCRETE CONCRETE BLOCK ASPHALT

APPLICATIONS:

- Ductile Iron
- Granite
- Class A Engineering Brick
- Clay Pavours
- Clay Pipes Vitrified
- Clay Roof Tiles
- Quarry Tiles
- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Pavours
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone
- Soft Slate
- Medium Sandstone
- Concrete Roof Tiles
- Concrete With Med Sharp Sand
- Coarse Sandstone
- Asphalt Over Concrete
- Shallow Concrete Screed
- Breeze Block
- Concrete Block Under 15kn
- Green Concrete
- Lignacite Blocks
- Asphalt

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXABX90115	115	2.0	22.23	45.92
MEXABX90125	125	2.0	22.23	56.12
MEXABX90150	150	2.4	22.23	71.42
MEXABX90180	180	2.4	22.23	85.00
MEXABX90230	230	2.4	22.23	113.52
MEXABX90300	300	3.2	20.00	179.00
MEXABX90350	350	3.2	20.00	204.08
MEXABX903505	350	3.2	25.40	204.08
MEXABX90450	450	3.6	25.40	378.00

- ▶ Segment: 10mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Laser Welded
- ▶ Gullet: Narrow Keyhole
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No

ANGLE GRINDER DISC CUTTER BENCH SAW FLOOR SAW



- ▶ Segment: 12mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Laser Welded
- ▶ Gullet: Narrow
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXTPX90300	300	3.2	20.00	154.41

DISC CUTTER



The TPX - Tri-Purpose diamond blade ensures that you have the correct diamond blade for the most common applications. The castellated segment design ensures quick stock clearance and a clean finish. In addition to its other attributes, it also has ventilation cooling holes within the steel centre which allows for rapid heat dispersion.



Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:

- Ductile Iron
- Granite
- Class A Engineering Brick
- Clay Paviours
- Clay Pipes Vitriified
- Clay Roof Tiles
- Quarry Tiles
- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Paviours
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone
- Soft Slate
- Medium Sandstone
- Concrete Roof Tiles
- Concrete With Med Sharp Sand
- Coarse Sandstone
- Asphalt Over Concrete
- Shallow Concrete Screed
- Breeze Block
- Concrete Block Under 15kn
- Green Concrete
- Lignacite Blocks
- Asphalt

TPXCEL TP
GRADE TRI-PURPOSE



Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



UNDERCUTTING PROTECTION

HEAT DISSIPATION COOLING HOLES

DP DPXCEL
GRADE DUAL PURPOSE



Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:

- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Paviours
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone
- Soft Slate
- Medium Sandstone
- Concrete Roof Tiles
- Concrete With Med Sharp Sand
- Coarse Sandstone
- Asphalt Over Concrete
- Shallow Concrete Screed
- Breeze Block
- Concrete Block Under 15kn
- Green Concrete
- Lignacite Blocks
- Asphalt




UNDERCUTTING PROTECTION

DUAL BOND DIAMOND SEGMENTS


Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXTPXL230	230	2.8	22.23	126.27
MEXTPXL300	300	3.2	20.00	210.46
MEXTPXL350	350	3.2	20.00	253.44
MEXTPXL350S	350	3.2	25.40	253.44
MEXTPXL400	400	3.5	20.00	323.04
MEXTPXL400S	400	3.5	25.40	323.04
MEXTPXL450S	450	3.6	25.40	393.38

- ▶ Segment: 10mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Laser Welded
- ▶ Gullet: Keyhole
- ▶ Usage: Wet or Dry
- ▶ Ventilation: Yes



Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXDPXL11522	115	2.4	22.23	54.84
MEXDPXL12522	125	2.4	22.23	56.12
MEXDPXL23022	230	2.8	22.23	104.16
MEXDPXL30020	300	3.2	20.00	194.43
MEXDPXL35020	350	3.2	20.00	253.44
MEXDPXL3502S	350	3.2	25.40	253.44
MEXDPXL4002S	400	3.2	25.40	348.20

- ▶ Segment: 10mm (15mm Deep Draft)
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Laser Welded
- ▶ Gullet: Narrow Keyhole
- ▶ Usage: Wet or Dry
- ▶ Ventilation: Yes



The ASX – Asphalt diamond blade range offers fast stock removal and excellent performance when used for cutting the most abrasive of applications such as asphalt, green concrete and cement screed.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging



APPLICATIONS:


- Concrete Roof Tiles
- Concrete with Med Sharp Sand
- Coarse Sandstone
- Breeze Block
- Shallow Concrete Screed
- Asphalt Over Concrete
- Concrete Block Under 15kn
- Green Concrete
- Lignacite Blocks
- Asphalt

AS **ASX10**
GRADE

ASPHALT

★★★★

DISC CUTTER BENCH SAW FLOOR SAW

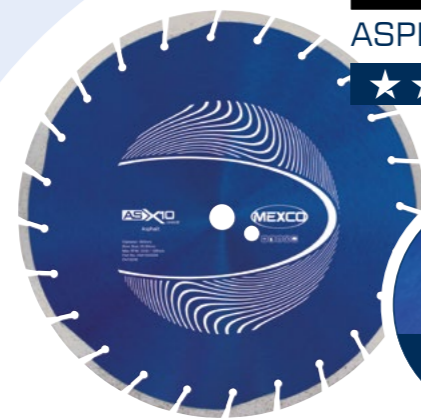

UNDERCUTTING PROTECTION

10MM SEGMENT HEIGHT



Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXASX10300	300	3.2	20.00	90.88
MEXASX10350	350	3.2	20.00	110.01
MEXASX103505	350	3.2	25.40	110.01

- ▶ Segment: 10mm (15mm Deep Draft)
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Sintered
- ▶ Gullet: Angled Narrow Keyhole
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No

AS **ASXCEL**
GRADE

ASPHALT

★★★★★

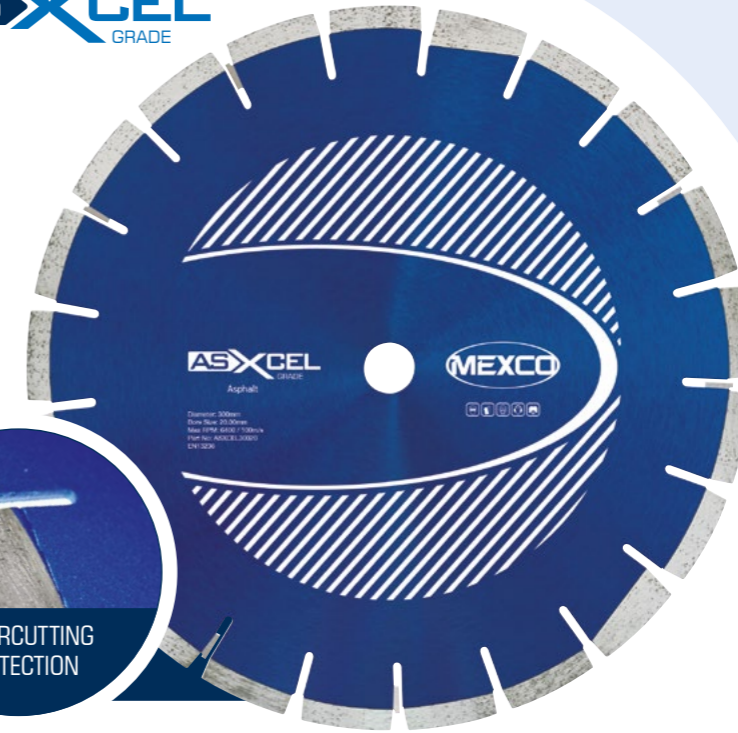

UNDERCUTTING PROTECTION

10MM SEGMENT HEIGHT

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXASXL30020	300	3.2	20.00	210.63
MEXASXL35020	350	3.2	20.00	263.03
MEXASXL35025	350	3.2	25.40	263.03
MEXASXL40020	400	3.6	20.00	383.51
MEXASXL40025	400	3.6	25.40	383.51
MEXASXL45025	450	3.6	25.40	393.38

- ▶ Segment: 10mm (15mm Deep Draft)
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Laser Welded
- ▶ Gullet: Narrow Slot
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No

DISC CUTTER BENCH SAW FLOOR SAW



AS **ASX90**
GRADE

ASPHALT

★★★★★

DISC CUTTER BENCH SAW FLOOR SAW



UNDERCUTTING PROTECTION

10MM SEGMENT HEIGHT

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXASX90300	300	3.2	20.00	178.00
MEXASX90350	350	3.2	25.40	225.00
MEXASX90450	450	3.6	25.40	359.68
MEXASX90500	500	4.0	25.40	538.15
MEXASX90600	600	4.5	25.40	860.20

- ▶ Segment: 10mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Laser Welded
- ▶ Gullet: Narrow U-Slot
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No

The ASX – Asphalt diamond blade range offers fast stock removal and excellent performance when used for cutting the most abrasive of applications such as asphalt, green concrete and cement screed.

Complimentary countertop display box if individual diameters are ordered in 10's. Only applies up to 300mm dia.



Typical Mexco Diamond Blade Product Packaging




APPLICATIONS:

- Concrete Roof Tiles
- Concrete with Med Sharp Sand
- Coarse Sandstone
- Breeze Block
- Shallow Concrete Screed
- Asphalt Over Concrete
- Concrete Block Under 15kn
- Green Concrete
- Lignacite Blocks
- Asphalt





SPECIALIST BLADE RANGE

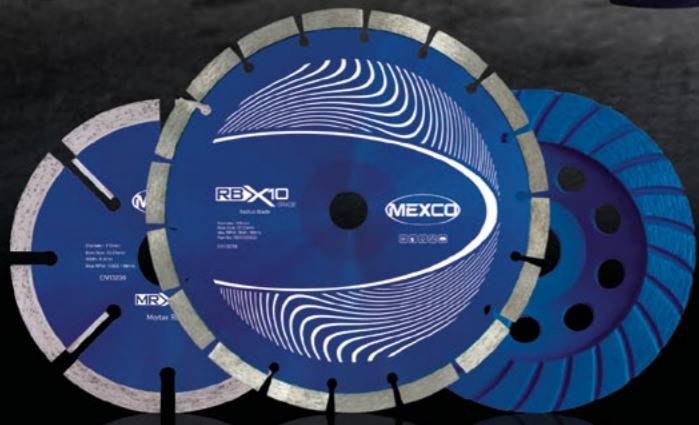

SEE OUR
PRODUCTS
ON **YouTube**

www.mexco.co.uk

DIAMOND CUTTING AND DRILLING TOOLS

SPECIALIST BLADES

RANGE

DEFINITION

PAGE LOCATION



RADIUS BLADE

The RBX Radius / Curve Cutting blade is designed to be used with angle grinders for cutting curves and radii with ease. Perfect for decorative driveway and patio work.



PAGE 28



FLUSH CUT BLADE

The FCX Flush Cut blade is designed to be used with angle grinders for both straight cutting and flush cutting. The flush face gives the opportunity for deep cutting and flat finishing.



PAGE 29



UNIVERSAL BLADE

The VBX Vacuum Brazed Universal blade provides very fast and effective stock removal. These blades will cut just about everything including brick, concrete, ductile iron, plastic and fibre glass.



PAGE 30



MORTAR RAKER

The MRX Mortar Raking blade offers fast removal of mortar joints between facing bricks, natural stone and blocks. Mortar raking blades can also be used in the cutting of lead flashing channels.



PAGE 31



CUP GRINDERS

CGX Diamond Cup Grinders are designed for use in conjunction with grinding machines and most angle grinders for the preparation or finishing of concrete and natural stone.



PAGE 32



CONCRETE LOOPING BLADE

CLX Concrete Looping blades are specifically designed to produce pre-determined width slots in concrete to insert detector loops. For use on floorsaws only.



PAGE 33



ASPHALT LOOPING BLADE

ALX Asphalt Looping blades are specifically designed to produce pre-determined width slots in asphalt to insert detector loops. For use on floorsaws only.



PAGE 33



FIBRE CEMENT BOARD

The FBX Blade has Polycrystalline diamond (PCD) teeth that cut through cement based fibre boards, composite materials and many other difficult applications.



PAGE 34



WOOD CUT BLADE

The WDX wood cut blade has fine pieces of tungsten grit vacuum brazed to the cutting edge; this manufacturing process offers fast cutting speeds and effective stock removal when cutting wood.



PAGE 35



METAL CUT BLADE

A vacuum brazed metal cutting blade providing superior cutting precision. The perforated steel core design reduces heat build-up and ensures quick cooling.



PAGE 36

The RBX - Radius / Curve Cutting diamond blade is designed to be used with 4.5" and 9" angle grinders for cutting curves and radii with ease. The radii of the curve can be altered by tilting the angle of the blade in the cut. These products are especially suited for cutting into concrete, natural stone and paving slabs, making them ideal for landscape gardeners, driveway installers, general builders and anybody doing decorative patio work.



Typical Blade Packaging




APPLICATIONS:


- Concrete
- Natural Stone
- Concrete Slabs
- Paving Blocks



Concave steel centre for cutting radii accurately with ease

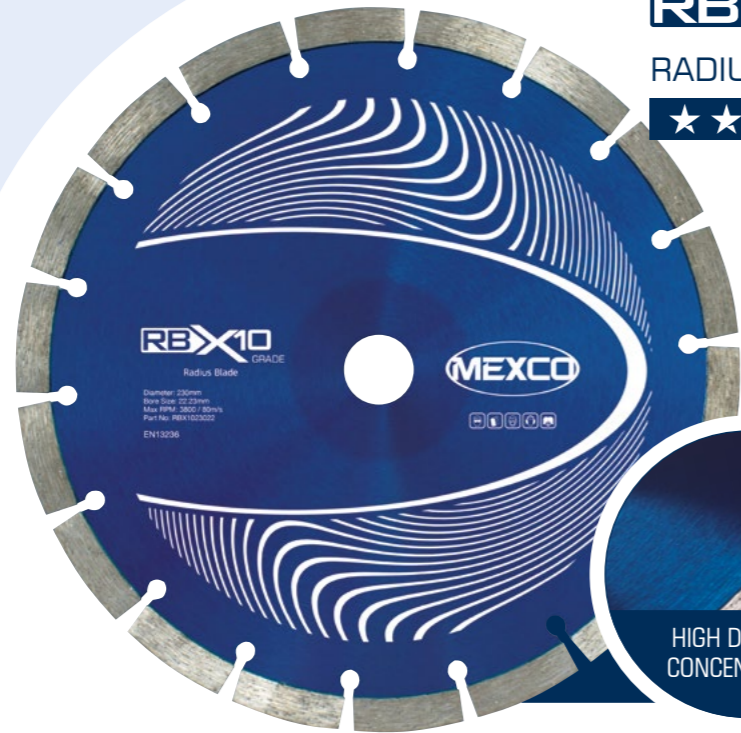

RBX10 GRADE
RADIUS BLADE
★★★★




HIGH DIAMOND CONCENTRATION

10MM SEGMENT HEIGHT

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXRBX10115	115	1.9	22.23	38.20
MEXRBX10230	230	2.6	22.23	89.22

Concave Blade Profile

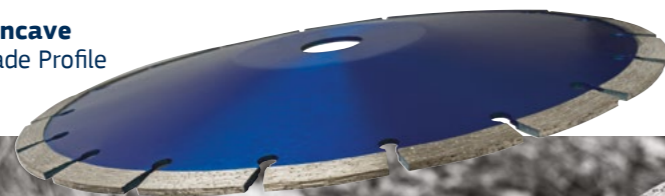

ANGLE GRINDER



FCXCEL GRADE
FLUSH CUT BLADE
★★★★★




M14 THREAD FLANGE ADAPTOR

USE ON ANGLE GRINDERS

- ▶ Segment: 10mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Sintered
- ▶ Gullet: Narrow Angled
- ▶ Usage: Dry Use
- ▶ Ventilation: No

ANGLE GRINDER

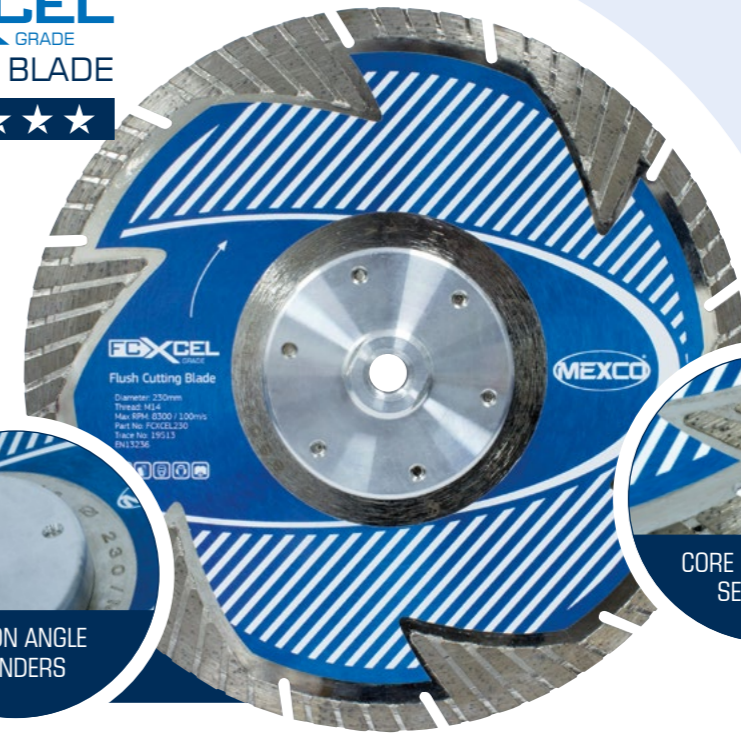

CORE PROTECTION SEGMENTS

Typical Blade Packaging



The FCX - Flush Cut diamond blade is designed to be used with angle grinders for both straight cutting and flush cutting. These blades are fitted with a detachable flange mount with an M14 thread that attaches directly to most angle grinders. The flush face gives the opportunity for deep cutting and flat finishing.

Fits most M14 Angle Grinders ◀



APPLICATIONS:

- Facing Bricks
- Slate
- Hard Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Slabs
- Lintels
- Concrete Paviments

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXFCXL115	115	2.0	M14 THREAD	112.00
MEXFCXL125	125	2.2	M14 THREAD	116.82
MEXFCXL230	230	2.5	M14 THREAD	172.84

Flange Blade Profile



The VBX90 - Vacuum Brazed Universal Diamond Blade

The Technology:

The VBX90 uses a process of vacuum brazing to attach large pieces of diamond grit to the cutting edge of a steel centre; this manufacturing process allows the diamond grit to be held constantly in contact with the material being cut producing very fast and effective stock removal.



Typical Mexco Diamond Blade Product Packaging

Applications:


Concrete, Reinforced Concrete, Paving, Indian Sandstone, Quarry Slabs, Granite Slabs, Plastic, Ducting, Glass, Rubber and Fibreglass.



Brick



Concrete



Ductile Iron




Plastics and Fibre Glass

VBX90 GRADE
UNIVERSAL BLADE



MRX90 GRADE
MORTAR RAKER

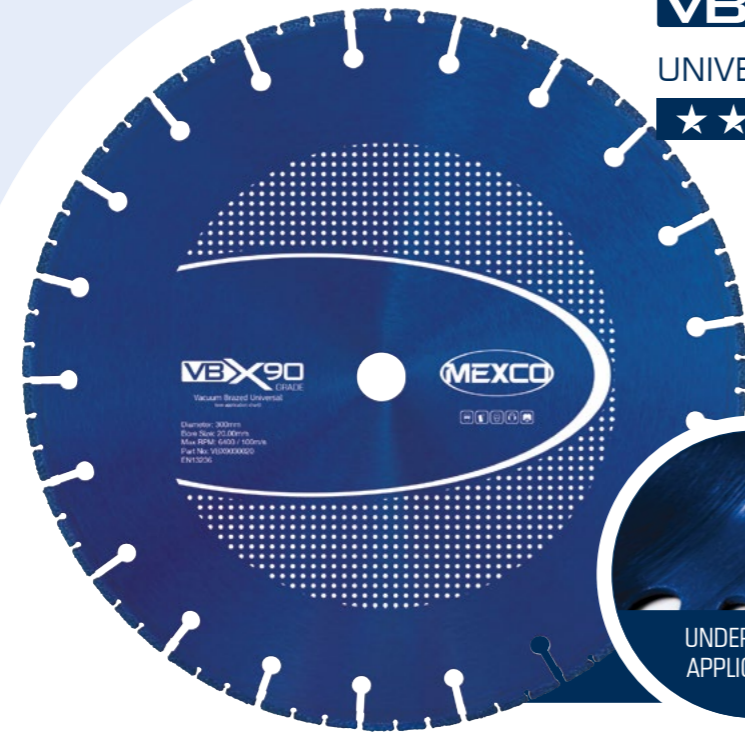

UNDERWATER APPLICATIONS




UNDER WATER APPLICATIONS

VACUUM BRAZED DIAMOND GRIT

6MM SEGMENT WIDTH



TCT UNDERCUTTING PROTECTION

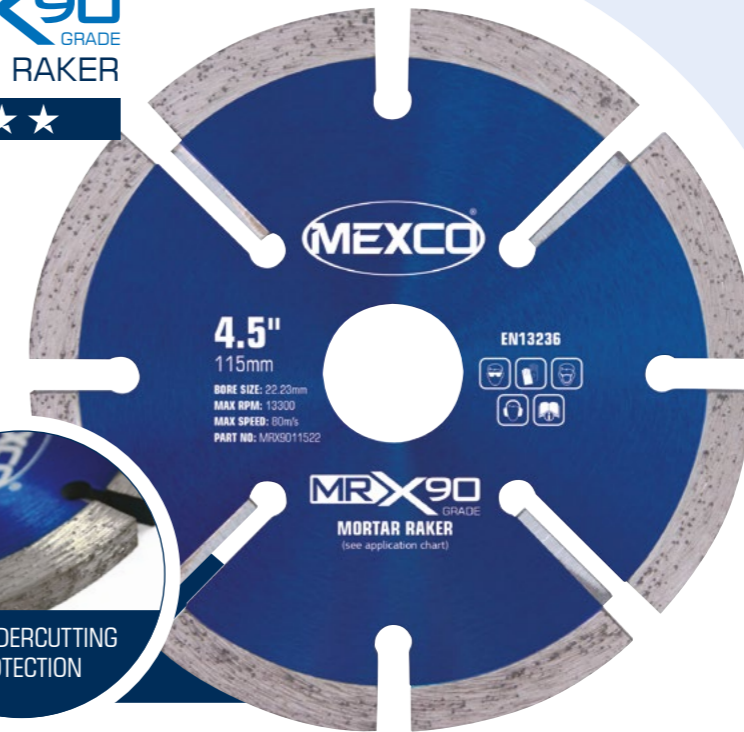

The MRX - Mortar Raking diamond blade offers fast removal of mortar joints between bricks, natural stone, blocks and facing bricks. Mortar raking blades can also be used in the cutting of lead flashing channels.



Typical Mexco Diamond Blade Product Packaging



MORTAR REMOVAL

APPLICATIONS:

- Mortar Joints
- Lead Flashing Channels

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXVBX9075	75	2.4	10.00	42.08
MEXVBX90115	115	2.4	22.23	42.08
MEXVBX90125	125	2.4	22.23	54.36
MEXVBX90230	230	2.4	22.23	66.63
MEXVBX90300	300	3.1	20.00	140.28
MEXVBX90350	350	3.1	20.00	193.59
MEXVBX903505	350	3.1	25.40	193.59
MEXVBX904005	400	3.1	25.40	238.40

- ▶ Segment Type: Vacuum Brazed
- ▶ Gullet: Keyhole
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No

- ▶ Segment Height: 7mm
- ▶ Segment Type: Segmented
- ▶ Segment Attachment: Sintered
- ▶ Gullet: Keyhole
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXMRX90115	115	6.0	22.23	46.30
MEXMRX90125	125	6.0	22.23	62.17
MEXMRX90180	180	6.0	22.23	142.86

AIR GRINDER ANGLE GRINDER DISC CUTTER



ANGLE GRINDER



Diamond Cup Grinders are designed for use in conjunction with grinding machines and angle grinders for the preparation or finishing of construction site materials. These products are especially suited for the preparation or repair of concrete and natural stone, the twin row segment allows fast stock removal whilst the turbo segment offers a smoother finish.

- ▶ **Twin Row = Course finish**
- ▶ **Turbo = Smooth finish**



Typical Blade Packaging




CONCRETE

APPLICATIONS:

- Concrete
- Natural Stone



CGX90 CUP GRINDER
GRADE

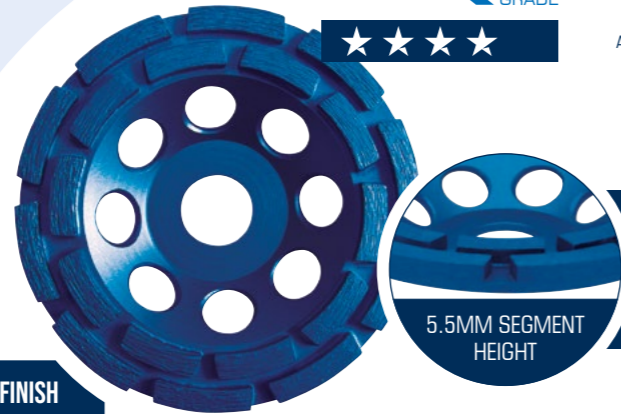

ANGLE GRINDER GRINDING MACHINE



TWIN ROW SEGMENTS FOR A MORE AGGRESSIVE GRINDING ACTION

COURSE FINISH

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXCGX90115	115	7.0	22.23	88.14
MEXCGX90125	125	7.0	22.23	92.71
MEXCGX90150	150	7.0	19.00	163.91
MEXCGX90180	180	7.0	22.23	159.95
MEXCGX90230	230	7.0	22.23	185.44

- ▶ **Segment Height:** 5.5mm
- ▶ **Segment Type:** Segmented
- ▶ **Segment Attachment:** Sintered
- ▶ **Gullet:** N/A
- ▶ **Usage:** Wet or Dry
- ▶ **Ventilation:** Yes

CONCRETE LOOPING **CLXCEL** GRADE

FLOOR SAW



AVAILABLE IN 6MM, 8MM, 10MM AND 12MM WIDTHS



HEAVY DUTY STEEL CENTRE

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXCLXL3506	350	6	25.40	548.45
MEXCLXL3508	350	8	25.40	548.45
MEXCLXL35010	350	10	25.40	601.60
MEXCLXL35012	350	12	25.40	633.52

- ▶ **Segment:** 7mm/10mm
- ▶ **Segment Type:** Segmented
- ▶ **Segment Attachment:** Brazed
- ▶ **Gullet:** Keyhole
- ▶ **Usage:** Wet or Dry
- ▶ **Ventilation:** No

OTHER SIZES AVAILABLE UPON REQUEST - CALL FOR DETAILS

These blades are specifically designed to produce pre-determined width slots in concrete or asphalt to insert detector loops.

For use on floorsaws only ◀



Typical Mexco Diamond Blade Product Packaging



Reinforced Concrete



Asphalt

APPLICATIONS
Concrete Looping Blades


- Concrete

APPLICATIONS
Asphalt Looping Blades

- Asphalt



CGX90T CUP GRINDER
GRADE

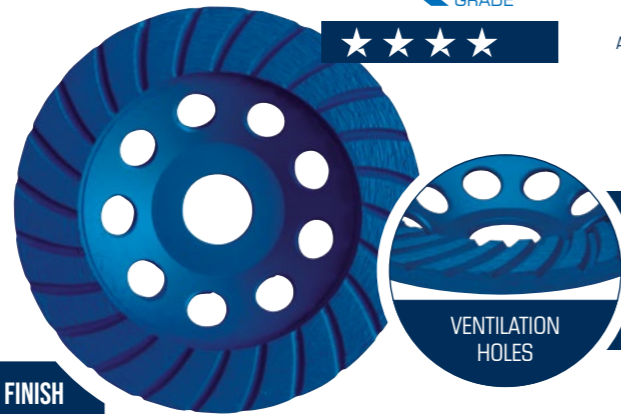

ANGLE GRINDER GRINDING MACHINE



TURBO DESIGN SEGMENT FOR SMOOTH FINISH

SMOOTH FINISH

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXCGX90T115	115	20	22.23	92.54
MEXCGX90T125	125	20	22.23	112.78
MEXCGX90T180	180	20	22.23	159.95

- ▶ **Segment Height:** 4mm
- ▶ **Segment Type:** Turbo
- ▶ **Segment Attachment:** Sintered
- ▶ **Gullet:** N/A
- ▶ **Usage:** Wet or Dry
- ▶ **Ventilation:** Yes

ASPHALT LOOPING **ALXCEL** GRADE

FLOOR SAW



AVAILABLE IN 6MM, 8MM, 10MM AND 12MM WIDTHS



HEAVY DUTY STEEL CENTRE

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXALXL3506	350	6	25.40	548.44
MEXALXL3508	350	8	25.40	548.45
MEXALXL35010	350	10	25.40	675.99
MEXALXL35012	350	12	25.40	761.07


- ▶ **Segment:** 10mm
- ▶ **Segment Type:** Segmented
- ▶ **Segment Attachment:** Brazed
- ▶ **Gullet:** Keyhole
- ▶ **Usage:** Wet or Dry
- ▶ **Ventilation:** No

OTHER SIZES AVAILABLE UPON REQUEST - CALL FOR DETAILS

The FBX Blade has Polycrystalline diamond (PCD) teeth that cut through cement based fibre boards, composite materials and many other difficult applications with outstanding performance results compared to a TCT blade or diamond continuous blade.

Common Applications Include:

Fibre cement board, laminated and melamine surfaces, GRP, softwoods, hardwoods, MDF, plywood and chipboard.



FBXCEL
GRADE
FIBRE CEMENT BOARD
★★★★★



POLYCRYSTALLINE DIAMOND TIP

CUTS FASTER AND LASTS LONGER THAN A TCT BLADE

WDXCEL
GRADE
WOOD CUT BLADE
★★★★★



VACUUM BRAZED TUNGSTEN GRIT

USE ON ANGLE GRINDERS

The WDXCEL - Vacuum Brazed Wood Cut Blade

The technology
The WDXCEL uses a process of vacuum brazing to attach fine pieces of tungsten grit to the cutting edge of a steel centre; this manufacturing process allows the grit to be held constantly in contact with the material being cut producing very fast and effective stock removal.

The Tungsten Carbide Grit Blade for Wood Cutting Applications

Fast cutting speed whilst offering an extended lifetime.

Product Code	Dia (mm)	Bore Size	Includes	List (£)
MEXFBXL160	160	20.00	20mm to 16mm Reducing Bush	89.22
MEXFBXL185	185	30.00	30mm to 16mm Reducing Bush	95.40
MEXFBXL216	216	30.00	30mm to 25mm Reducing Bush 30mm to 16mm Reducing Bush	151.77
MEXFBXL254	254	30.00	30mm to 25.4mm Reducing Bush 30mm to 25mm Reducing Bush 30mm to 16mm Reducing Bush	213.00

- ▶ Segment: Vacuum Brazed
- ▶ Gullet: Keyhole
- ▶ Usage: Dry Use
- ▶ Ventilation: No

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXWDXL115	115	1.0	22.23	27.67
MEXWDXL125	125	1.0	22.23	31.79



WOOD

APPLICATIONS:

- Wood
- Plastic
- Plaster

The MEXCEL vacuum brazed metal cutting blade provides superior cutting precision. The perforated steel core design reduces heat build-up and ensures quick cooling - perfect for intensive use.



Typical Mexco Diamond Blade Product Packaging



METAL

APPLICATIONS:

- High and Low Carbon Steel
- Hard Facing Alloys
- Ductile Iron
- Cast Iron
- Steel Section, Bar and Tube
- Weld Removal



Equivalent lifetime of over 40 conventional carborundum abrasive wheels.

MEXCEL
GRADE
METAL CUT BLADE



4.5"
115mm

BORE SIZE: 22.23mm
MAX RPM: 16600 / 100m/s
PART NO: MEXCEL11522

USE ON ANGLE GRINDERS

VACUUM BRAZED DIAMOND GRIT

Product Code	Dia (mm)	Seg Width	Bore Size	List (£)
MEXMEXL115	115	1.5	22.23	47.48
MEXMEXL125	125	1.5	22.23	52.08
MEXMEXL230	230	1.8	22.23	115.53
MEXMEXL300	300	3.1	20.00	266.18
MEXMEXL350	350	3.1	25.40	327.90

- ▶ High Diamond Concentration
- ▶ Segment Type: Continuous
- ▶ Segment: Vacuum Brazed
- ▶ Usage: Dry Use
- ▶ Ventilation: Yes



THE LONGER LASTING ALTERNATIVE TO ABRASIVE WHEELS

Benefit over conventional abrasive wheels

- ▶ Cost Efficiency: Long tool life and less down time
- ▶ Environmental and Operator Friendly: Reduced sparks and no odour
- ▶ Safety: Wheel breakage eliminated
- ▶ Wheel Wear: No reduction in tool size or shape
- ▶ Shelf Life: Unlimited



Product Code	Description	List (£)
MEX11510MUL	115mm Multi-Cut Thin Discs (Tin of 10)	16.00

MULTI-CUT THIN DISCS

The Mexco Multi-Cut Thin Discs will cut a wide range of materials used in the construction and fabrication industries.

The cutting disc is only 1mm thick, which in turn allows a fast cutting action with less waste and dust. They are suitable for cutting sheet metal, stainless steel (inox), pipes and profiles, brick, stone, ceramic tiles and other building materials along with plastics / PVC.



STONE




METAL



PVC



Abrasive Wheel Flat Cutting Profile



Diameter (mm)	Thickness (mm)	Bore Size (mm)
115	1.0	22.23

ANGLE GRINDER



- ▶ Fast cutting action
- ▶ 1mm thin for less waste and dust
- ▶ Suitable for use on Angle Grinders

ABRASIVE WHEELS

MEXCO DIAMOND TOOLS

Bonded, fully reinforced, cutting and grinding discs, manufactured to the highest European standards. The grinding disc has a high stock removal, whilst the cutting disc gives a fast, clean and accurate cut, both maintaining a long life and excellent performance.



The PW - Bullnose Profile Wheel is the perfect tool for producing a bullnose profile edge on a range of materials including natural stone, slate and porcelain.



APPLICATIONS:

- Natural Stone
- Slate
- Porcelain

Related item see page 58 for Ceramica Diamond Dry Polishing Discs

PW X GEL GRADE
PROFILE WHEEL
★★★★★

ANGLE GRINDER

USE ON ANGLE GRINDERS

VACUUM BRAZED DIAMOND GRIT

Product Code	Dia (mm)	Profile Depth	Bore Size	List (£)
MEXPWXL11522	115	22	22.23	109.86
MEXPWXL11532	115	32	22.23	162.47

- ▶ Bullnose Profile
- ▶ Profile Finish: Vacuum Brazed
- ▶ Profile Depth: 22mm / 32mm
- ▶ Usage: Wet or Dry
- ▶ Ventilation: No

CM X10 GRADE

GP X10 GRADE

HM X10 GRADE

TRIPLE PACK
★★★

ANGLE GRINDER

- CM - Ceramic Materials Blade
- GP - General Purpose Concrete Blade
- HM - Hard Materials Blade

Product Code	Dia (mm)	Bore Size	List (£)
	Various	22.23	17.38
CM BLADE	110		
GP BLADE	115		
HM BLADE	115		

MEXCO X10 GRADE

DIAMOND BLADE TRIPLE PACK

www.mexco.co.uk

Three common use angle grinder blades

The pack includes 1 x 110mm CMX10 Ceramic Diamond Blade, 1 x 115mm GPX10 General Purpose Concrete Diamond Blade and 1 x 115mm HMX10 Hard Materials Diamond Blade.



Supplied in a complimentary countertop display box when triple packs are ordered in quantities of 10.

APPLICATIONS
CMX10 CERAMIC BLADE

- Ceramic Tiles
- Marble Tiles

APPLICATIONS
GPX10 CONCRETE BLADE

- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs
- Concrete Slabs
- Reinforced Lintels
- Hard Limestone
- Limestone Aggregate Concrete
- Concrete Pavements
- Soft Facing Brick
- Concrete Blocks Over 15kn
- Hard Sandstone

APPLICATIONS
HMX10 HARD MATERIALS BLADE

- Granite
- Class A Engineering Brick
- Clay Pavements
- Clay Pipes Vitrified
- Clay Roof Tiles
- Quarry Tiles
- Non Abrasive Indian Sandstone
- Hard Facing Brick
- Medium Facing Brick
- Hard Slate
- River Gravel Aggregate Concrete
- Flint Aggregate Concrete
- Reinforced Concrete
- Concrete Kerbs





DRY CORE DRILL RANGE



SEE OUR
PRODUCTS
ON **YouTube**

www.mexco.co.uk

DIAMOND CUTTING AND DRILLING TOOLS

RANGE



The DCX90 range of dry core drills offer fast drilling speeds and all round performance in masonry building materials due to the high quality diamond segments and welded barrels.



The Laser welded castellated segment on the DCXCEL range of professional dry core drills offer the user a faster and accurate drilling experience due to the high diamond grit concentration and rooftop segments.



A comprehensive range of HEX and SDS adaptors and associated core drill accessories.



DRY CORE DRILLS

CONTENTS

PAGE LOCATION

9 PIECE KIT

38mm, 52mm and 117mm
DCX90 GRADE slotted barrel core drills.

PAGE 42

11 PIECE KIT

38mm, 52mm, 65mm, 117mm and 127mm
DCX90 GRADE slotted barrel core drills.

PAGE 43

DUST MANAGEMENT KIT

38mm, 52mm and 117mm
DCX90 GRADE solid barrel core drills.

PAGE 44

SOLID BARREL CORE DRILLS

22mm to 162mm diameter
DCX90 GRADE solid barrel core drills.

PAGE 45

SLOTTED BARREL CORE DRILLS

22mm to 182mm diameter
DCX90 GRADE slotted barrel core drills.

PAGE 45

8 PIECE KIT

107mm and 152mm
DCXCEL GRADE slotted barrel core drills.

PAGE 46

9 PIECE KIT

38mm, 52mm and 117mm
DCXCEL GRADE slotted barrel core drills.

PAGE 47

11 PIECE KIT

38mm, 52mm, 65mm, 117mm and 127mm
DCXCEL GRADE slotted barrel core drills.

PAGE 48

SOLID BARREL CORE DRILLS

22mm to 182mm diameter
DCXCEL GRADE solid barrel core drills.

PAGE 49

SLOTTED BARREL CORE DRILLS

22mm to 202mm diameter
DCXCEL GRADE slotted barrel core drills.

PAGE 49

DRY CORE DRILL ACCESSORIES

HEX and SDS Adaptors, Pilot Drills, Extension Bars, Guide Rod and Drift Key.

PAGE 50

The DCX90 RANGE of dry core drills are ideal for the plumber, builder and general tradesman providing a compact and versatile 9 piece kit for drilling holes in masonry from 38mm – 117mm. All the items included within the 9 piece kit can be purchased individually for the purpose of restocking.

Advisory: Mexco dry core drills should be used in conjunction with a minimum 850W+ drill motor fitted with a slipping clutch. Before use, refer to the power tool or drill motor manufacturers handbook for suitability or restrictions when using diamond core drills.



DCX90 GRADE
★★★★
9 PIECE CORE DRILL KIT
PRODUCT CODE: MEXA10DCK7



Complimentary stacker unit when purchased in quantities of 5 or more

DCX90 GRADE
★★★★
11 PIECE CORE DRILL KIT
PRODUCT CODE: MEXA10DCK11



Complimentary stacker unit when purchased in quantities of 5 or more

The DCX90 RANGE of dry core drills are ideal for the plumber, builder and general tradesman providing a versatile 11 piece kit for drilling holes in masonry from 38mm – 127mm. All the items included within the 11 piece kit can be purchased individually for the purpose of restocking.

Advisory: Mexco dry core drills should be used in conjunction with a minimum 850W+ drill motor fitted with a slipping clutch. Before use, refer to the power tool or drill motor manufacturers handbook for suitability or restrictions when using diamond core drills.



APPLICATIONS:

- Soft / Medium Facing Brick
- Concrete Blocks
- Hard Sandstone
- Coarse Sandstone
- Soft Slate
- Breeze Blocks
- Lignacite Blocks


- ▶ Segment Height: 10mm
- ▶ Segment Type: Flat Curve
- ▶ Segment Attachment: Brazed
- ▶ Barrel Type: Slotted and Fluted
- ▶ Usage: Dry Use
- ▶ Grade: X90

COMPLETE 9 PIECE KIT


Product Code	Contents	List (£)
MEXA10DCK7	COMPLETE CORE DRILL KIT	168.87

KIT INCLUDES


Product Code	Kit Includes
MEXA10DC38	38mm Core Drill - Slotted and Fluted Barrel
MEXA10DC52	52mm Core Drill - Slotted and Fluted Barrel
MEXA10DC117	117mm Core Drill - Slotted and Fluted Barrel
MEXSDSADA80	SDS 80mm Adaptor
MEXSDSADA250	SDS 250mm Adaptor
MEXHEXADA80	HEX 80mm Adaptor
MEXHEXADA250	HEX 250mm Adaptor
MEXATAPER175	175mm Pilot Drill
MEXDRKEY	Drift Key




SLOTTED AND FLUTED STEEL BARREL




1/2" BSP BACK END FITMENT




HIGH DIAMOND CONCENTRATION



SLOTTED AND FLUTED STEEL BARREL



1/2" BSP BACK END FITMENT



HIGH DIAMOND CONCENTRATION

COMPLETE 11 PIECE KIT

Product Code	Contents	List (£)
MEXA10DCK11	COMPLETE CORE DRILL KIT	258.28

KIT INCLUDES

Product Code	Kit Includes
MEXA10DC38	38mm Core Drill - Slotted and Fluted Barrel
MEXA10DC52	52mm Core Drill - Slotted and Fluted Barrel
MEXA10DC65	65mm Core Drill - Slotted and Fluted Barrel
MEXA10DC117	117mm Core Drill - Slotted and Fluted Barrel
MEXA10DC127	127mm Core Drill - Slotted and Fluted Barrel
MEXSDSADA80	SDS 80mm Adaptor
MEXSDSADA250	SDS 250mm Adaptor
MEXHEXADA80	HEX 80mm Adaptor
MEXHEXADA250	HEX 250mm Adaptor
MEXATAPER175	175mm Pilot Drill
MEXDRKEY	Drift Key



APPLICATIONS:

- Soft / Medium Facing Brick
- Concrete Blocks
- Hard Sandstone
- Coarse Sandstone
- Soft Slate
- Breeze Blocks
- Lignacite Blocks

- ▶ Segment Height: 10mm
- ▶ Segment Type: Flat Curve
- ▶ Segment Attachment: Brazed
- ▶ Barrel Type: Slotted and Fluted
- ▶ Usage: Dry Use
- ▶ Grade: X90

The 9 piece DCX90 dust management core drill kit provides the user with a diamond core drilling system capable of drilling in masonry up to 3 times faster than an equivalent slotted barrel core drill. Included within the kit is a heavy duty dust swivel unit and rubber vacuum adaptor for connecting the unit to a suitable dust extraction device. All the items included within the dust management kit can be purchased individually for the purpose of restocking.

Advisory: Mexco dry core drills should be used in conjunction with a minimum 850W+ drill motor fitted with a slipping clutch. Before use, refer to the power tool or drill motor manufacturers handbook for suitability or restrictions when using diamond core drills.



DCX90
GRADE
★★★★
DUST MANAGEMENT KIT
PRODUCT CODE: MEXA10DMCDK9

DCX90
GRADE
★★★★
INDIVIDUAL DRY CORE DRILLS



SLOTTED FLUTED BARREL

Product Code	Diameter (mm)	Length (mm)	List (£)
MEXA10DC22	22	400	50.52
MEXA10DC28	28	400	54.35
MEXA10DC32	32	400	56.24
MEXA10DC38	38	165	46.45
MEXA10DC48	48	165	50.32
MEXA10DC52	52	165	55.49
MEXA10DC65	65	165	59.35
MEXA10DC78	78	165	63.22
MEXA10DC82	82	165	66.00
MEXA10DC91	91	165	68.37
MEXA10DC102	102	165	73.55
MEXA10DC107	107	165	77.41
MEXA10DC117	117	165	79.97
MEXA10DC127	127	165	83.84
MEXA10DC132	132	165	96.80
MEXA10DC142	142	165	99.32
MEXA10DC152	152	165	110.78
MEXA10DC162	162	165	114.80
MEXA10DC172	172	165	139.33
MEXA10DC182	182	165	139.33




SOLID FLUTED BARREL

Product Code	Diameter (mm)	Length (mm)	List (£)
MEXA10DC22U	22	400	50.52
MEXA10DC28U	28	400	54.35
MEXA10DC32U	32	400	56.24
MEXA10DC38U	38	165	46.45
MEXA10DC48U	48	165	50.32
MEXA10DC52U	52	165	55.49
MEXA10DC65U	65	165	59.35
MEXA10DC78U	78	165	63.22
MEXA10DC82U	82	165	66.00
MEXA10DC91U	91	165	68.37
MEXA10DC102U	102	165	73.55
MEXA10DC107U	107	165	77.41
MEXA10DC117U	117	165	79.97
MEXA10DC127U	127	165	83.84
MEXA10DC152U	152	165	110.78
MEXA10DC162U	162	165	114.80

The DCX90 RANGE of dry core drills offer fast drilling speeds and all round performance in masonry building materials due to the high quality diamond segments and welded barrels.

Advisory: Mexco dry core drills should be used in conjunction with a minimum 850W+ drill motor fitted with a slipping clutch. Before use, refer to the power tool or drill motor manufacturers handbook for suitability or restrictions when using diamond core drills.

Solid barrel dry core drills should only be used with an adequate dust extraction system; core drills used in this way can drill in excess of 300% faster than their slotted equivalents.

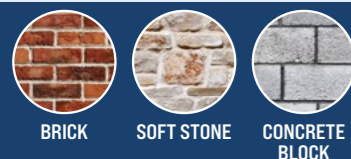

APPLICATIONS:

- Soft / Medium Facing Brick
- Concrete Blocks
- Hard Sandstone
- Coarse Sandstone
- Soft Slate
- Breeze Blocks
- Lignacite Blocks

- ▶ Segment Height: 10mm
- ▶ Segment Type: Flat Curve
- ▶ Segment Attachment: Brazed
- ▶ Barrel Type: Solid
- ▶ Usage: Dry Use
- ▶ Grade: X90

UP TO 3 TIMES FASTER
THAN A CONVENTIONAL SLOTTED
BARREL CORE DRILL!




COMPLETE DUST MANAGEMENT KIT

Product Code	Contents	List (£)
MEXA10DMCDK9	COMPLETE CORE DRILL KIT	349.00

KIT INCLUDES

Product Code	Kit Includes
MEXA10DC38U	38mm Core Drill - Solid Barrel
MEXA10DC52U	52mm Core Drill - Solid Barrel
MEXA10DC117U	117mm Core Drill - Solid Barrel
MEXSDSADA80	SDS 80mm Adaptor
MEXHEXADA80	HEX 80mm Adaptor
MEXATAPER175	175mm Pilot Drill
MEXDRKEY	Drift Key
MEX150EXT	150mm Extension Bar
MEXEXTRACT	Dust Swivel Unit

Additional individual DCX90 GRADE solid barrel core drills can be found on Page 45

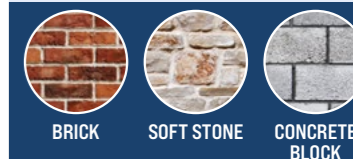

APPLICATIONS:

- Soft / Medium Facing Brick
- Concrete Blocks
- Hard Sandstone
- Coarse Sandstone
- Soft Slate
- Breeze Blocks
- Lignacite Blocks

- ▶ Segment Height: 10mm
- ▶ Segment Type: Flat Curve
- ▶ Segment Attachment: Brazed
- ▶ Usage: Dry Use
- ▶ Grade: X90

Dry core drill accessories can be found on Page 50

The DCXCEL RANGE of laser welded dry core drills are ideal for the plumber, builder, electrician and general tradesman providing a compact and versatile 8 piece kit for drilling holes in masonry from 107mm – 152mm.

The laser welded castellated segment on the DCXCEL range of professional dry core drills offer the user a faster and accurate drilling experience due to the high diamond grit concentration and rooftop segments.

All the items included within the 8 piece kit can be purchased individually for the purpose of restocking.

Advisory: Mexco dry core drills should be used in conjunction with a minimum 850W+ drill motor fitted with a slipping clutch. Before use, refer to the power tool or drill motor manufacturers handbook for suitability or restrictions when using diamond core drills.



Perfect for electricians



Complimentary stacker unit when purchased in quantities of 5 or more




The DCXCEL RANGE of laser welded dry core drills are ideal for the plumber, builder, electrician and general tradesman providing a compact and versatile 9 piece kit for drilling holes in masonry from 38mm – 117mm.

The laser welded castellated segment on the DCXCEL range of professional dry core drills offer the user a faster and accurate drilling experience due to the high diamond grit concentration and rooftop segments.

All the items included within the 9 piece kit can be purchased individually for the purpose of restocking.

Advisory: Mexco dry core drills should be used in conjunction with a minimum 850W+ drill motor fitted with a slipping clutch. Before use, refer to the power tool or drill motor manufacturers handbook for suitability or restrictions when using diamond core drills.

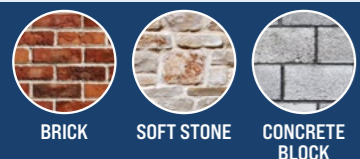

APPLICATIONS:

- Soft / Medium Facing Brick
- Concrete Blocks
- Hard Sandstone
- Coarse Sandstone
- Soft Slate
- Breeze Blocks
- Lignacite Blocks

- ▶ Segment Height: 10mm
- ▶ Segment Type: Castellated
- ▶ Segment Attachment: Laser Weld
- ▶ Barrel Type: Slotted and Fluted
- ▶ Usage: Dry Use
- ▶ Grade: XCEL

COMPLETE 8 PIECE KIT


Product Code	Contents	List (£)
MEXA11DCDK8	COMPLETE CORE DRILL KIT	218.53

KIT INCLUDES


Product Code	Kit Includes
MEXA11LC107	107mm Core Drill - Slotted and Fluted Barrel
MEXA11LC152	152mm Core Drill - Slotted and Fluted Barrel
MEXSDSADA80	SDS 80mm Adaptor
MEXSDSADA250	SDS 250mm Adaptor
MEXHEXADA80	HEX 80mm Adaptor
MEXHEXADA250	HEX 250mm Adaptor
MEXATAPER175	175mm Pilot Drill
MEXDRKEY	Drift Key




SLOTTED AND FLUTED STEEL BARREL




SLOTTED AND FLUTED STEEL BARREL




1/2" BSP BACK END FITMENT



1/2" BSP BACK END FITMENT



CASTELLATED ROOFTOP SEGMENTS




CASTELLATED ROOFTOP SEGMENTS

COMPLETE 9 PIECE KIT

Product Code	Contents	List (£)
MEXA11DCDK9	COMPLETE CORE DRILL KIT	258.26

KIT INCLUDES

Product Code	Kit Includes
MEXA11LC38	38mm Core Drill - Slotted and Fluted Barrel
MEXA11LC52	52mm Core Drill - Slotted and Fluted Barrel
MEXA11LC117	117mm Core Drill - Slotted and Fluted Barrel
MEXSDSADA80	SDS 80mm Adaptor
MEXSDSADA250	SDS 250mm Adaptor
MEXHEXADA80	HEX 80mm Adaptor
MEXHEXADA250	HEX 250mm Adaptor
MEXATAPER175	175mm Pilot Drill
MEXDRKEY	Drift Key

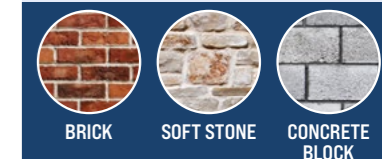

APPLICATIONS:

- Soft / Medium Facing Brick
- Concrete Blocks
- Hard Sandstone
- Coarse Sandstone
- Soft Slate
- Breeze Blocks
- Lignacite Blocks

- ▶ Segment Height: 10mm
- ▶ Segment Type: Castellated
- ▶ Segment Attachment: Laser Weld
- ▶ Barrel Type: Slotted and Fluted
- ▶ Usage: Dry Use
- ▶ Grade: XCEL

The DCXCEL RANGE of laser welded dry core drills are ideal for the plumber, builder, electrician and general tradesman providing a versatile 11 piece kit for drilling holes in masonry from 38mm – 127mm.

The laser welded castellated segment on the DCXCEL range of professional dry core drills offer the user a faster and accurate drilling experience due to the high diamond grit concentration and rooftop segments.

All the items included within the 11 piece kit can be purchased individually for the purpose of restocking.

Advisory: Mexco dry core drills should be used in conjunction with a minimum 850W+ drill motor fitted with a slipping clutch. Before use, refer to the power tool or drill motor manufacturers handbook for suitability or restrictions when using diamond core drills.



DCXCEL
GRADE



11 PIECE CORE DRILL KIT

PRODUCT CODE: MEXA11DCDK11

LASER
WELDED SEGMENTS




Complimentary stacker unit when purchased in quantities of 5 or more

COMPLETE 11 PIECE KIT

Product Code	Contents	List (£)
MEXA11DCDK11	COMPLETE CORE DRILL KIT	337.73

KIT INCLUDES

Product Code	Kit Includes
MEXA11LC38	38mm Core Drill - Slotted and Fluted Barrel
MEXA11LC52	52mm Core Drill - Slotted and Fluted Barrel
MEXA11LC65	65mm Core Drill - Slotted and Fluted Barrel
MEXA11LC117	117mm Core Drill - Slotted and Fluted Barrel
MEXA11LC127	127mm Core Drill - Slotted and Fluted Barrel
MEXSDSADA80	SDS 80mm Adaptor
MEXSDSADA250	SDS 250mm Adaptor
MEXHEXADA80	HEX 80mm Adaptor
MEXHEXADA250	HEX 250mm Adaptor
MEXATAPER175	175mm Pilot Drill
MEXDRKEY	Drift Key

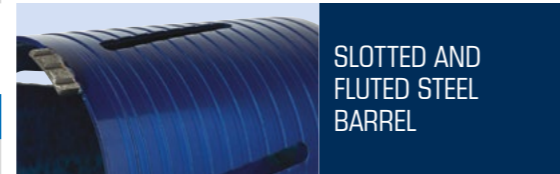

SLOTTED AND FLUTED STEEL BARREL



1/2" BSP BACK END FITMENT



CASTELLATED ROOFTOP SEGMENTS

DCXCEL
GRADE



INDIVIDUAL DRY CORE DRILLS

LASER
WELDED SEGMENTS



SLOTTED FLUTED BARREL

Product Code	Diameter (mm)	Length (mm)	List (£)
MEXA11LC22	22	400	106.00
MEXA11LC28	28	400	111.00
MEXA11LC32	32	400	116.00
MEXA11LC38	38	165	58.63
MEXA11LC52	52	165	70.04
MEXA11LC65	65	165	74.90
MEXA11LC78	78	165	87.67
MEXA11LC107	107	165	97.71
MEXA11LC117	117	165	100.93
MEXA11LC127	127	165	105.81
MEXA11LC152	152	165	139.82
MEXA11LC162	162	165	144.89
MEXA11LC182	182	165	176.19
MEXA11LC202	202	165	180.28

SOLID FLUTED BARREL

Product Code	Diameter (mm)	Length (mm)	List (£)
MEXA11LC22S	22	400	106.00
MEXA11LC28S	28	400	111.00
MEXA11LC32S	32	400	116.00
MEXA11LC38S	38	165	58.63
MEXA11LC52S	52	165	70.04
MEXA11LC65S	65	165	74.90
MEXA11LC107S	107	165	97.71
MEXA11LC117S	117	165	100.93
MEXA11LC127S	127	165	105.81
MEXA11LC152S	152	165	139.82
MEXA11LC162S	162	165	144.89
MEXA11LC182S	182	165	176.19

The laser welded castellated segment on the DCXCEL range of professional dry core drills offer the user a faster and accurate drilling experience due to the high diamond grit concentration and rooftop segments.

Advisory: Mexco dry core drills should be used in conjunction with a minimum 850W+ drill motor fitted with a slipping clutch. Before use, refer to the power tool or drill motor manufacturers handbook for suitability or restrictions when using diamond core drills.

Solid barrel dry core drills should only be used with an adequate dust extraction system; core drills used in this way can drill in excess of 300% faster than their slotted equivalents.



APPLICATIONS:

- Soft / Medium Facing Brick
- Concrete Blocks
- Hard Sandstone
- Coarse Sandstone
- Soft Slate
- Breeze Blocks
- Lignacite Blocks

- ▶ Segment Height: 10mm
- ▶ Segment Type: Castellated
- ▶ Segment Attachment: Laser Weld
- ▶ Barrel Type: Slotted and Fluted
- ▶ Usage: Dry Use
- ▶ Grade: XCEL



APPLICATIONS:

- Soft / Medium Facing Brick
- Concrete Blocks
- Hard Sandstone
- Coarse Sandstone
- Soft Slate
- Breeze Blocks
- Lignacite Blocks

- ▶ Segment Height: 10mm
- ▶ Segment Type: Castellated
- ▶ Segment Attachment: Laser Weld
- ▶ Barrel Type: Slotted and Fluted
- ▶ Usage: Dry Use
- ▶ Grade: XCEL

DRY CORE DRILL ACCESSORIES



Product Code	Description	Item	List (£)
MEXSDSADA250	SDS Chuck Adaptor - 1/2" BSP Male - 250mm		31.88
MEXSDSADA200	SDS Chuck Adaptor - 1/2" BSP Male - 200mm		31.88
MEXSDSADA80	SDS Chuck Adaptor - 1/2" BSP Male - 80mm		18.56
MEXHEXADA250	HEX 13mm Chuck Adaptor - 1/2" BSP Male - 250mm		29.34
MEXHEXADA200	HEX 13mm Chuck Adaptor - 1/2" BSP Male - 200mm		29.34
MEXHEXADA80	HEX 13mm Chuck Adaptor - 1/2" BSP Male - 80mm		16.26
MEXDRKEY	Drift Key		5.05
MEXATAPER175	10mm x 175mm A-Taper Pilot Drill		11.43
MEXATAPER300	10mm x 300mm A-Taper Pilot Drill		16.19
MEXATAPER465	10mm x 465mm A-Taper Pilot Drill		18.80
MEXGUIDEROD	Guide Rod - 185mm		8.61
MEXHEXPK80	Adaptor Pack 13mm HEX Fitment - 80mm*		29.28
MEXSDSPK80	Adaptor Pack SDS Fitment - 80mm*		31.26
MEXHEXPK250	Adaptor Pack 13mm HEX Fitment - 250mm*		42.05
MEXSDSPK250	Adaptor Pack SDS Fitment - 250mm*		42.05
MEX150EXT	150mm Extension Bar 1/2" BSP		25.50
MEX460EXT	460mm Extension Bar 1/2" BSP		69.66
MEXA30ADA6	1/2" BSP Male - 1/2" BSP Male Adaptor		67.12
MEXA30ADA5	1/2" BSP Female - 1/2" BSP Female Adaptor		67.12
MEXDEXTRACT	Dust Extraction Unit 1/2" BSP Female to 1/2" BSP Male		149.00

*ADAPTOR PACKS INCLUDE : 175mm A-TAPER PILOT DRILL, DRIFT KEY AND ADAPTOR

WET CORE DRILL RANGE




- Rooftop Segment
- Universal Reinforced Concrete Segment
- Fast Cut, Long Life Segment

TYPICAL APPLICATIONS

Granite • Reinforced Concrete • Brick • Flint Concrete



WET CORE DRILL ACCESSORIES



Product Code	Description	List (£)
MEXA30ADA1	1 1/4" Male to 1/2" Male Adaptor	91.43
MEXA30ADA2	1 1/4" Female to 1/2" Female Adaptor	127.00
MEXA30EXT200	150mm Extension Bar 1 1/4" UNC	78.94
MEXA30EXT400	400mm Extension Bar 1 1/4" UNC	122.59

1/2" BSP MALE FITMENT



Product Code	Dia (mm)	Length (mm)	Fitment	List (£)
MEXA11CD14	14	300	1/2" M	80.88
MEXA11CD16	16	300	1/2" M	80.88
MEXA11CD18	18	300	1/2" M	81.11
MEXA11CD20	20	300	1/2" M	87.06
MEXA11CD22	22	300	1/2" M	92.80
MEXA11CD24	24	300	1/2" M	95.02
MEXA11CD25	25	300	1/2" M	96.94
MEXA11CD28	28	300	1/2" M	100.76
MEXA11CD30	30	300	1/2" M	105.13
MEXA11CD32	32	300	1/2" M	110.94
MEXA11CD35	35	300	1/2" M	120.14
MEXA11CD38	38	300	1/2" M	124.39
MEXA11CD40	40	300	1/2" M	127.38
MEXA11CD42	42	300	1/2" M	131.52

1 1/4" UNC FEMALE FITMENT



Product Code	Dia (mm)	Length (mm)	Fitment	List (£)
MEXA11WC42	42	450	1 1/4" UNC	113.52
MEXA11WC48	48	450	1 1/4" UNC	118.63
MEXA11WC52	52	450	1 1/4" UNC	118.62
MEXA11WC65	65	450	1 1/4" UNC	123.34
MEXA11WC72	72	450	1 1/4" UNC	132.01
MEXA11WC78	78	450	1 1/4" UNC	140.57
MEXA11WC86	86	450	1 1/4" UNC	146.36
MEXA11WC92	92	450	1 1/4" UNC	159.42
MEXA11WC102	102	450	1 1/4" UNC	168.42
MEXA11WC108	108	450	1 1/4" UNC	178.14
MEXA11WC112	112	450	1 1/4" UNC	198.45
MEXA11WC117	117	450	1 1/4" UNC	220.79
MEXA11WC127	127	450	1 1/4" UNC	246.17
MEXA11WC132	132	450	1 1/4" UNC	286.57
MEXA11WC152	152	450	1 1/4" UNC	304.23
MEXA11WC162	162	450	1 1/4" UNC	335.51
MEXA11WC178	178	450	1 1/4" UNC	360.80
MEXA11WC182	182	450	1 1/4" UNC	377.87
MEXA11WC200	200	450	1 1/4" UNC	406.88
MEXA11WC250	250	450	1 1/4" UNC	443.82

ASPHALT WET CORE DRILLS AVAILABLE UPON REQUEST

TAKE CONTROL
**DRILL
CLEANER AND
FASTER**
UP TO 5 TIMES
FASTER THAN
CONVENTIONAL
TILE DRILLING
WE RECOMMEND USING AN
ANGLE GRINDER - SEE IT
IN ACTION!



PORCELAIN



CERAMIC TILES



GRANITE

TILE DRILL RANGE

DRILL INTO
**PORCELAIN
AND CERAMICS**
EFFORTLESSLY

IDEAL FOR

Bathroom Installers and Kitchen Fitters
Plumbers • Electricians • Tilers
General Builders and Landscapers



WATER?
NOT REQUIRED



SEE OUR
PRODUCTS
ON **YouTube**



Professional Ultra Hard Material

★★★★★ TILE DRILLS

Offering the user a superior performance when drilling into the hardest of engineered and natural decorative materials. Available for both HEX fit drills or M14 fit angle grinders.

WAX FILLED (HEX DRILL FITMENT)



SUITABLE FOR
CORDED DRILLS



Product Code	Dia (mm)	Fitment	List (£)
MEXA10VBDB55	5.5	HEX	28.80
MEXA10VBDB6	6	HEX	28.80
MEXA10VBDB7	7	HEX	29.00
MEXA10VBDB8	8	HEX	29.00
MEXA10VBDB10	10	HEX	30.86
MEXA10VBDB12	12	HEX	36.40
MEXA10VBDBSET	Multi Pack *	HEX	100.51

* Mutli Pack includes 1x 5.5mm, 1x 6mm, 1x 7mm and 1x 8mm drill bits.

WAX FILLED (M14 ANGLE GRINDER FITMENT)



Drill bits with a M14 angle grinder fitment will require a M14 to Hex chuck adaptor to work with a HEX fit drill.



SUITABLE FOR
ANGLE GRINDERS



SUITABLE FOR
CORDED DRILLS (with adaptor)

Product Code	Dia (mm)	Fitment	List (£)
MEXTDXL6	6	M14	39.55
MEXTDXL7	7	M14	39.55
MEXTDXL8	8	M14	40.82
MEXTDXL10	10	M14	45.92
MEXTDXL12	12	M14	46.46
MEXTDXL14	14	M14	47.45

SLOTTED BARREL (M14 ANGLE GRINDER FITMENT)



Drill bits with a M14 angle grinder fitment will require a M14 to Hex chuck adaptor to work with a HEX fit drill.



SUITABLE FOR
ANGLE GRINDERS



SUITABLE FOR
CORDED DRILLS (with adaptor)

Product Code	Dia (mm)	Fitment	List (£)
MEXTDXL18	18	M14	48.16
MEXTDXL20	20	M14	49.28
MEXTDXL25	25	M14	56.42
MEXTDXL32	32	M14	61.83
MEXTDXL35	35	M14	68.90
MEXTDXL38	38	M14	71.42
MEXTDXL45	45	M14	83.46
MEXTDXL50	50	M14	85.92
MEXTDXL60	60	M14	94.80
MEXTDXL68	68	M14	107.03
MEXTDXL75	75	M14	110.30
MEXTDXL82	82	M14	116.43
MEXTDXL91	91	M14	155.95
MEXTDXL110	110	M14	228.31

Adaptor Kit

M14 TO HEX (HEX DRILL FITMENT)

The M14 to Hex Chuck Adaptor accommodates the use of a tile drill supplied with an angle grinder fitment on a drill with a three jaw chuck by converting the M14 connection to a Hex connection.



Product Code	Fitment	List (£)
MEXTDXM14HEX	M14 to HEX	14.30

Wax Filled
TILE DRILL KIT
(M14 ANGLE GRINDER FITMENT)

Offering maximum performance when drilling the hardest of materials. No water is required due to a special wax filled core that melts, lubricates and cools when drilling. Supplied to fit M14 thread angle grinders although an adaptor is included to convert for use with a drill.



Product Code	Description	List (£)
MEXTDXLKIT4	Tile Drill Kit	165.70

KIT INCLUDES

Product Code	Kit Includes
MEXTDXL6	6mm Tile Drill - Wax filled M14 fitment
MEXTDXL7	7mm Tile Drill - Wax filled M14 fitment
MEXTDXL8	8mm Tile Drill - Wax filled M14 fitment
MEXTDXL10	10mm Tile Drill - Wax filled M14 fitment
MEXTDXLWAX	Cooling Wax
MEXTDXM14HEX	M14 to HEX Adaptor

Wax Filled
ROUTER FINGER
(M14 ANGLE GRINDER FITMENT)

Wax filled Router Finger supplied to fit M14 thread angle grinders. Can be used on a corded drill with the addition of the M14 to HEX chuck adaptor. Used for milling, chamfering, drilling and expansion cutting in hard materials.



Product Code	Dia (mm)	Fitment	List (£)
MEXTDXLROUT	20	M14	88.00

Wax Filled and Slotted Barrel
TILE DRILL KIT
WITH DIAMOND BLADE

Offering maximum performance when drilling or cutting the hardest of materials. The tile drills are supplied to fit M14 threaded angle grinders although an adaptor is included to convert for use with a drill.




Product Code	Description	List (£)
MEXTDXLKIT5	Tile Drill Kit with Diamond Blade	223.70

KIT INCLUDES

Product Code	Kit Includes
MEXTDXL6	6mm Tile Drill - Wax filled M14 fitment
MEXTDXL7	7mm Tile Drill - Wax filled M14 fitment
MEXTDXL18	18mm Tile Drill - M14 fitment
MEXTDXL25	25mm Tile Drill - M14 fitment
MEXUHL115BA	115mm Ultra Hard Materials Diamond Blade
MEXTDXLWAX	Cooling Wax
MEXTDXM14HEX	M14 to HEX Adaptor

Countersink
PROFILER CONES
(M14 ANGLE GRINDER FITMENT)

Specifically designed to enlarge, shape and refine existing holes made in porcelain, ceramic, marble and granite materials. Perfect for smoothing and polishing rough edges.

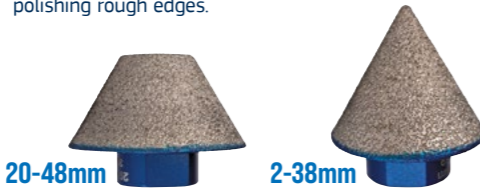

Product Code	Dia (mm)	Fitment	List (£)
MEXVBCXL2048	20 - 48	M14	109.86
MEXVBCXL238	2 - 38	M14	91.22



Diamond Tile Drill
COOLING WAX

For cooling and lubricating Mexco Diamond Tile Drill Bits.

Product Code	Description	List (£)
MEXTDXLWAX	Cooling and Lubricating Wax	9.56

HOLE SAW RANGE

BI METAL SETS

Perfect for Plumbers and Electricians

Bi-Metal Holesaws contained within a handy aluminium effect carry case. Common saw sizes to suit the plumbing and electrical professional. Welded seams and heat treated bodies for maximum strength.



SEE OUR
PRODUCTS
ON **YouTube**

CUTTING AND DRILLING TOOLS

Bi-Metal
HOLESAW SET
PLUMBERS 9 PIECE



Kit Contents:

- ▶ 19mm Holesaw
- ▶ 22mm Holesaw
- ▶ 29mm Holesaw
- ▶ 38mm Holesaw
- ▶ 44mm Holesaw
- ▶ 57mm Holesaw
- ▶ plus Adaptors

Product Code	Description	List (£)
MEXHOLSET	9 Piece Holesaw Set	87.41

Bi-Metal
HOLESAW SET
ELECTRICIANS 10 PIECE



Kit Contents:

- ▶ 20mm Holesaw
- ▶ 25mm Holesaw
- ▶ 32mm Holesaw
- ▶ 60mm Holesaw
- ▶ 73mm Holesaw
- ▶ 79mm Holesaw
- ▶ plus Adaptors

Product Code	Description	List (£)
MEXHOLSETELE	10 Piece Holesaw Set	94.32



PRESSURISED WATER BOTTLES

The Mexco pressurised water container provides a mobile wet cutting solution to eliminate dust build up when operating cut-off saws. With up to 3 bar working pressure there is no requirement for an external water source connection.



SEE OUR **PRODUCTS** ON **YouTube**

Pressurised 10 LITRE WATER BOTTLE

- ▶ 10 Litre Capacity
- ▶ Heavy Duty Casing
- ▶ Up to 3 bar Operating Pressure
- ▶ 4m Flexi Hose
- ▶ Heavy Duty Carry Handle
- ▶ Stable Base
- ▶ Steel Piston
- ▶ Built In Water Filter
- ▶ Quick Connector Supplied

SPECIFICATIONS

- Construction Material: Polyethylene
- Weight when empty: 2.8 kg
- Max. operating temperature: 40°C
- Max. spraying pressure: 3 bar



Product Code	Description	List (£)
MEX3270	10 Litre Water Container	154.41

Pressurised 14 LITRE WATER BOTTLE


- ▶ 14 Litre Capacity
- ▶ Heavy Duty Casing
- ▶ Up to 3 bar Operating Pressure
- ▶ 2m Flexi Hose
- ▶ Large Easy Fill Funnel
- ▶ Robust Pump Mechanism
- ▶ Pressure Relief Valve
- ▶ Adjustable Shoulder Strap
- ▶ Robust Carry Handle
- ▶ Quick Connector Supplied



Product Code	Description	List (£)
MEX3180	14 Litre Water Container	114.25

10L WATER BOTTLE SPARE PARTS


Most of the components that go into making the 10 litre water container are available as replacement parts.

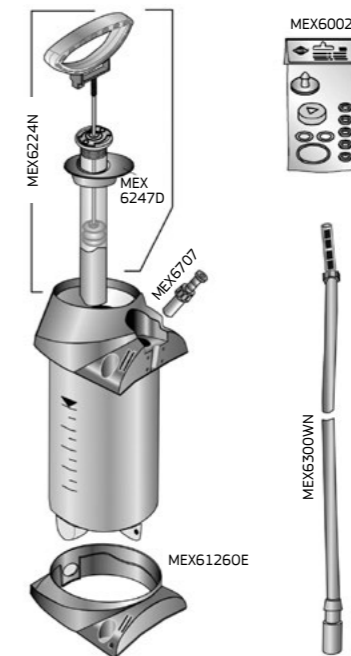

Product Code and Description	List (£)
MEX6002 Service Kit (inc. O Rings and Gaskets)	30.11
MEX61260E Foot Ring (Black)	20.20
MEX6224N Hand Pump Piston	104.61
MEX6247D Funnel Cover	11.58
MEX6300WN 4m Hose, Inline Filter and Coupling	56.71
MEX6707 Piston Pressure Release Cap	26.35

14L WATER BOTTLE SPARE PARTS

Most of the components that go into making the Mexco 14 litre water container are available as replacement parts.

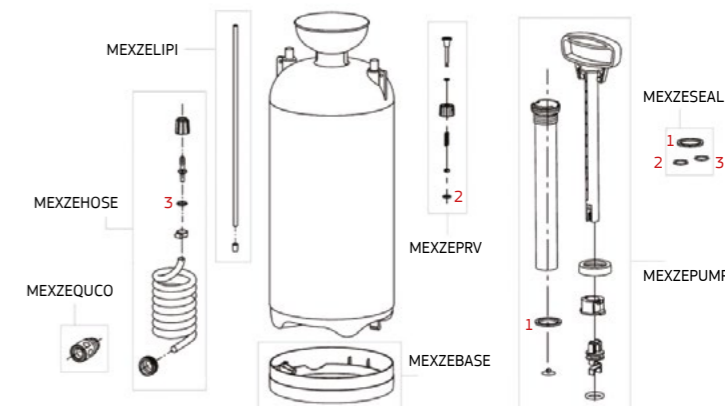

Product Code	Description	List (£)
MEXZELIPI	Lift Pipe Assembly	11.84
MEXZEHOSE	Hose Assembly Kit	24.39
MEXZEQUCO	Quick Connector	9.64
MEXZEPRV	Pressure Valve Assembly Kit	6.55
MEXZEBASE	Replacement Base	15.55
MEXZEPUMP	Replacement Pump Handle Kit	19.29
MEXZESEAL	O Ring Seals	11.56

CERAMICA DIAMOND DRY POLISHING DISCS 8 PIECE SET



The ultimate dry polishing system for marble, granite and other natural stones, ideal for working on site, widely used by floor renovators, restorers and natural stone floor specialists.

This 8 piece set includes 7 polishing discs ranging from 50 – 3000 grit grade and a backing pad for use on an angle grinder.

- ▶ Hook and loop backing for quick release
- ▶ 100mm / 4" dia.
- ▶ M14 angle grinder fitment (backing pad)


COMPLETE 8 PIECE SET

Product Code	Description	List (£)
MEXPOLKIT	DIAMOND DRY POLISHING DISCS	71.31

SET INCLUDES

Quantity	Description
1	100mm dia. 50 Grit Polishing Disc
1	100mm dia. 100 Grit Polishing Disc
1	100mm dia. 200 Grit Polishing Disc
1	100mm dia. 400 Grit Polishing Disc
1	100mm dia. 800 Grit Polishing Disc
1	100mm dia. 1500 Grit Polishing Disc
1	100mm dia. 3000 Grit Polishing Disc
1	100mm dia. Backing Pad (M14 Angle Grinder Fit)

CERAMICA DIAMOND DRY POLISHING DISCS INDIVIDUAL DISCS

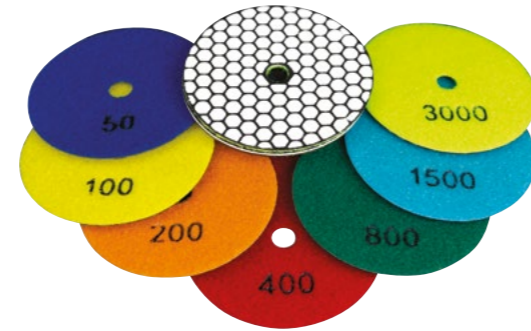

- ▶ Hook and loop backing for quick release
- ▶ 100mm / 4" dia.
- ▶ M14 angle grinder fitment (backing pad)

Product Code	Description and Colour Code	List (£)
MEXPAD50	50 Grit Polishing Disc (Dark Blue)	8.17
MEXPAD100	100 Grit Polishing Disc (Yellow)	8.17
MEXPAD200	200 Grit Polishing Disc (Orange)	8.17
MEXPAD400	400 Grit Polishing Disc (Red)	8.17
MEXPAD800	800 Grit Polishing Disc (Green)	8.17
MEXPAD1500	1500 Grit Polishing Disc (Turquoise)	8.17
MEXPAD3000	3000 Grit Polishing Disc (Saturn Yellow)	8.17
MEXBACKPAD	Velcro Backing Pad (M14 Fitment)	14.95

MEXCO ONE SHOT OIL (100ml)



Mexco One Shot Oil Premium Synthetic Formulation

Pre-measured 100ml bottle of premium grade 2 stroke oil, specifically designed to run in mixture lubricated 2 stroke engines.

50:1 Mix - 100ml
One bottle to 1 gallon to give a 50/1 mix.

Product Code	Description	List (£)
MEXSHOT	Two Stroke One Shot Oil	POA

REDUCING BUSHES



Diamond blade bushes for the reduction of diamond blade bore diameter to fit smaller spindle machines. When fitting bush please ensure it is fitted securely.

Product Code	Size	List (£)
MEXRED2016	20.00 - 16.00	6.32
MEXRED2215	22.23 - 15.00	6.32
MEXRED2216	22.23 - 16.00	6.32
MEXRED2220	22.23 - 20.00	6.32
MEXRED25415	25.40 - 15.00	6.32
MEXRED2520	25.40 - 20.00	6.32
MEXRED2522	25.40 - 22.23	6.32
MEXRED3125	31.75 - 25.40	5.90

DIAMOND SHARPENING STONE



Mexco Sharpening Stone Ceramic mixture bonded in plastic

A diamond sharpening stone for optimal and precise re-sharpening of all diamond cutting discs* which will help maximise the cutting ability and lifetime of the diamond blade.

* Not suitable for superficially coated diamond blades such as the vacuum brazed VBX range and the MEX range of Mexco blades.

Sharpening Stone Dimensions: 200mm x 50mm x 50mm

- ▶ Special ceramic mixture bonded in plastic
- ▶ Fast sharpening speed
- ▶ Grain is not damaged during sharpening
- ▶ Dry use only

Product Code	Description	List (£)
MEXCERSTONE	Diamond Sharpening Stone	35.00



Unit 1, Carminow Road Industrial Estate,
Bodmin, Cornwall, PL31 1EP

Web: www.mexco.co.uk

EDITION 05-25

TOOLBANK



FSC® Paper Source
Recycle this catalogue when updated
Take care of the earth