

# TOOLBANK

## PRODUCT GUIDE



World's Strongest Bond™



**JB WELD** **HIGHER STRENGTH FORMULA** **5020 PSI**

**J-B Weld™**

Original Cold-Weld™ Formula  
Steel Reinforced Epoxy

Strength 5020 PSI  
Set Time 4-6 Hours  
Cure Time 15-24 Hours  
Cure Color Dark Gray

Works on Multiple Surfaces  
Our Strongest Epoxy

Great For:  
• Household Repairs  
• Automotive  
• Plumbing  
• Marine  
• Crafts & More

Metal • Wood • Plastic • Tile • PVC • Ceramic  
• Fiberglass • Concrete & More

**THE ORIGINAL COLD-WELD**  
2-PART EPOXY SYSTEM  
2 oz

**JB WELD**  
WORLD'S STRONGEST BOND

**STEEL REINFORCED, AN ALTERNATIVE TO TORCH WELDING**

**FOR USE ON**

- ★ METAL
- ★ WOOD
- ★ CONCRETE
- ★ PLASTIC & PVC
- ★ CERAMIC TILE
- ★ FIBERGLASS

PERFECT FOR HOUSEHOLD, AUTOMOTIVE, CRAFT REPAIR AND MORE

★ OUR STRONGEST EPOXY EVER! ★

**VERSATILE & DEPENDABLE**

5020 PSI

550° F (287° C)

WHEN FULLY CURED, J-B WELD ORIGINAL IS WATERPROOF AND RESISTANT TO PETROLEUM, CHEMICAL AND ACID

**1 PREPARE THE SURFACE**

**2 MIX EQUAL PARTS FROM EACH TUBE**

**3 APPLY** **4 LET DRY**

4-6 HRS SET TIME

15-24 HRS CURE TIME

CURE COLOR: DARK GRAY

**JB WELD**

WORLD'S STRONGEST BOND

**DON'T RELY ON SOMEONE ELSE, DO IT YOURSELF WITH J-B WELD**



**PRODUCT HIGHLIGHTS**

**TWIN TUBES PRODUCT GUIDE**

PAGE **4**

**SYRINGES PRODUCT GUIDE**

PAGE **6**

**PUTTY STICKS PRODUCT GUIDE**

PAGE **8**

**THREADLOCKERS PRODUCT GUIDE**

PAGE **10**

**FIBERWELD REPAIR CASTS PRODUCT GUIDE**

PAGE **11**

# TWIN TUBES PRODUCT GUIDE

Our Twin Tubes are what started it all. These two-part epoxies are some of our most versatile products. With a paste-like consistency, Twin Tubes are great at filling gaps and cracks. And once cured, they create a permanent bond and can be sanded, drilled, tapped, shaped and painted.

- OUR ORIGINAL EPOXIES
  - BONDING AND GAP FILLING
  - MOST VERSATILE
- To see our Twin Tubes in action.



Product Attributes							Metals				Plastics		Other Materials			
	Strength	Set Time	Cure Time	Dry Color	Max Temp (°F)	Fuel Resistance	Aluminum	Copper	Iron	Steel	PVC	ABS	Wood	Stone/Concrete	Fiberglass	Ceramic
<b>J-B Weld</b> JBW8265SUK/ JBW8281UKList	5020 PSI	4-6 hrs	15-24 hrs	Dark Grey	550	Best	Better	Best	Best	Best	Good	Good	Better	Best	Better	Better
<b>KwikWeld</b> JBW8276UK	3127 PSI	6 min	4-6 hrs	Dark Grey	250	Good	Good	Good	Good	Good	Good	Good	Good	Better	Better	Good
<b>MarineWeld</b> JBW8272UK	5020 PSI	4-6 hrs	15-24 hrs	Dark Grey	550	Better	Best	Better	Better	Better	Better	Better	Better	Better	Best	Better

## KwikWeld® 2 x 30ml

KwikWeld is the fast-setting version of The Original J-B Weld two-part epoxy system.

- Strength:** 3127 PSI
- Set time:** 6 minutes
- Cure time:** 4-6 hours
- Cure color:** Dark grey

- Great for:**
- Most metals
  - Stone/Concrete
  - Fiberglass
- Top Attributes:**
- Fast 6 min set time
  - Strong bond on most surfaces

- Good for:**
- Rigid plastic
  - Wood
  - Ceramic
- Primary Applications:**
- Fast bonding and gap-filling projects on metal and other substrates.

Part No	Size	Barcode	List
JBW8276UK	2 x 30ml	043425700049	£5.83



## J-B Weld® 2 x 30ml | 2 x 148ml

J-B Weld is The Original Cold Weld™ two-part epoxy system that provides strong, lasting adhesion and gap-filling to metal and other surfaces.

- Great for:**
- All metals
  - Stone/Concrete
  - Fiberglass
- Top Attributes:**
- J-B Weld's strongest epoxy
  - 550°F temperature resistance
  - Fuel resistant

- Good for:**
- Rigid plastic
  - Wood
  - Ceramic
- Primary Applications:**
- High-strength repairs and crafts, along with bonding and gap filling on metals, concrete and other surfaces.

- Strength:** 5020 PSI
- Set time:** 4-6 hours
- Cure time:** 15-24 hours
- Cure color:** Dark grey



Part No	Size	Barcode	List
JBW8265SUK	2 x 30ml	043425700018	£5.83
JBW8281UKSRP	2 x 148ml	043425700056	£16.66



## MarineWeld® 2 x 30ml

MarineWeld is a specially formulated two-part epoxy system that provides strong, lasting repairs for boats and other marine equipment.

- Strength:** 5020 PSI
- Set time:** 4-6 hours
- Cure time:** 15-24 hours
- Cure color:** Grey

- Great for:**
- Aluminum
  - Other metals
  - Fiberglass
- Top Attributes:**
- Waterproof
  - High bonding strength

- Good for:**
- Rigid plastic
  - Wood
- Primary Applications:**
- Repairs on boats, pools, plumbing, and other marine equipment.

Part No	Size	Barcode	List
JBW8272UK	2 x 30ml	043425700032	£6.66



# SYRINGES PRODUCT GUIDE

J-B Weld Syringes deliver high-strength bonding in an easy-to-use applicator that dispenses the two-part adhesive in a precise 1-to-1 ratio. For convenient mixing, each product comes with a tray and stick. No other tools are necessary. Syringes are ideal for bonding and gap-filling. After curing, they can be sanded and painted.

- HIGH STRENGTH, TWO-COMPONENT ADHESIVES
- PRECISE 1-TO-1 RATIO
- EASY AND CONVENIENT TO MIX



To see our Syringes in action.

SYRINGES	Product Attributes					Metals				Plastics			Other Materials					
	Strength	Set Time	Cure Time	Dry Color	Max Temp	Fuel Resistance	Aluminum	Copper	Iron	Steel	PVC	ABS	Flexible Plastic*	Wood	Stone/Concrete	Fiberglass	Glass	Ceramic
ClearWeld JBW50112UK	3900 PSI	5 min	1 hour	Clear	250°F		Better	Better	Better	Better	Better	Better	Better	Better	Good	Best	Better	Better
MinuteWeld JBW50101UK	2300 PSI	1 min	1 hour	Clear	250°F		Good	Good	Good	Good	Good	Good	Good	Better	Good	Good	Good	Good
PlasticWeld JBW50132UK	3900 PSI	5 min	1 hour	Yellow	250°F		Good	Good	Good	Good	Best	Best	Better	Good	Better	Good	Better	Good
PlasticBonder JBW50133UK/ JBW50139UK	3770 PSI	15 min	30 min	Tan/Black	250°F		Good	Good	Good	Good	Best	Best	Best	Good	Good	Good		Good
KwikWeld JBW50176UK	3127 PSI	6 min	4-6 hrs	Dark Grey	250°F	Good	Better	Better	Better	Better	Good	Good		Better	Better	Better		Better
MarineWeld JBW50172UK	2350 PSI	5 min	1 hour	White	250°F		Good	Good	Good	Good	Better	Better	Best	Better	Good	Better		Good
J-B Weld JBW50165UK	5020 PSI	4-6 hrs	15-24 hrs	Dark Grey	250°F		Best	Best	Best	Best	Good			Good				Good
HighHeat JBW50197UK	4730 PSI	1 hour	24 hrs (w heat)	Dark Grey	250°F		Best	Best	Best	Best				Best	Good			

\*Not polypropylene or polyethylene



## ClearWeld 25ml

ClearWeld is a clear-curing epoxy adhesive that sets quickly and provides strong adhesion.

- Strength:** 3900 PSI
- Set time:** 5 min
- Cure time:** 1 hour
- Cure color:** Clear



Part No	Colour Dry	Barcode	List
JBW50112UK	Clear	043425700117	£5.83

- Great for:**
- Glass
  - Tile
  - Rigid plastics

- Top Attributes:**
- Cures clear
  - High strength
  - Quick 5 min set time

- Good for:**
- Ceramic
  - Wood
  - Most metals

- Primary Applications:**
- Invisible, high-strength bonding applications for repairs, builds, and crafts.



## MinuteWeld 25ml

MinuteWeld is a clear-curing epoxy adhesive that sets in 1 minute.

- Strength:** 2300 PSI
- Set time:** 1 minute
- Cure time:** 1 hour
- Cure color:** Clear

Part No	Colour Dry	Barcode	List
JBW50101UK	Clear	043425700100	£6.66

- Great for:**
- Glass
  - Tile
  - Ceramic

- Top Attributes:**
- Sets in 1 minute
  - Cures clear
  - No clamping

- Good for:**
- Rigid plastics
  - Metal
  - Stone

- Primary Applications:**
- Fast-setting bonding & gap-filling applications on many different substrates.



## PlasticBonder Tan | Black 25ml

PlasticBonder is a flexible, strong adhesive that provides long-lasting bonding and gap-filling solutions to most plastics.

- Strength:** 3770 PSI
- Set time:** 15 min
- Cure time:** 30 min
- Cure color:** Tan

Part No	Colour Dry	Barcode	List
JBW50133UK	Tan	043425700131	£6.24
JBW50139UK	Black	043425700155	£6.66

- Great for:**
- Most flexible or rigid plastics\*
- \*Not polypropylene or polyethylene

- Top Attributes:**
- Flexible
  - High strength
  - Fast 30 min cure time

- Good for:**
- Fiberglass
  - Metal
  - Wood

- Primary Applications:**
- Bonding and gap-filling solutions on most plastic substrates.



## PlasticWeld 25ml

PlasticWeld is a high-strength epoxy adhesive that provides a quick-setting, bond to rigid plastics.

- Strength:** 3900 PSI
- Set time:** 5 min
- Cure time:** 1 hour
- Cure color:** Translucent Yellow

Part No	Colour Dry	Barcode	List
JBW50132UK	Yellow	043425501325	£5.83

- Great for:**
- PVC
  - ABS
  - Rigid plastics

- Top Attributes:**
- High bond strength
  - Cures clear
  - Quick 5 min set time

- Good for:**
- Glass
  - Tile
  - Metal

- Primary Applications:**
- Clear bonding and gap-filling applications on PVC, ABS and other rigid or semi-rigid plastics.



## KwikWeld 25ml

KwikWeld is the fast-setting version of J-B Weld in an easy-to-use dispenser.

- Strength:** 3127 PSI
- Set time:** 6 min
- Cure time:** 4-6 hours
- Cure color:** Dark Grey

Part No	Colour Dry	Barcode	List
JBW50176UK	Dark Grey	043425700179	£6.24

- Great for:**
- Most metals
  - Stone/Concrete
  - Fiberglass

- Top Attributes:**
- Fast 6 minute set time
  - Strong bond on most surfaces

- Good for:**
- Rigid plastic
  - Wood
  - Ceramic

- Primary Applications:**
- Fast-bonding projects on metal and other substrates.



## MarineWeld 25ml

MarineWeld is an adhesive & gap filler that provides waterproof, impact and UV-resistant bonds to fiberglass, most plastics, and other surfaces.

- Strength:** 2350 PSI
- Set time:** 5 min
- Cure time:** 1 hour
- Cure color:** White

Part No	Colour Dry	Barcode	List
JBW50172UK	White	043425501721	£6.66

- Great for:**
- Fiberglass
  - Most plastics\*
  - Rubber
- \*Not polypropylene or polyethylene

- Top Attributes:**
- Waterproof
  - Flexible
  - (Impact/vibration resistant)
  - UV-resistant

- Good for:**
- Metal
  - Stone/Concrete

- Primary Applications:**
- Bonding and gap-filling applications for marine, pool, kitchen & bath.



## J-B Weld® 25ml

J-B Weld our Original Cold-Weld® epoxy in an easy-to-use syringe dispenser for strong, lasting adhesion

- Strength:** 5020 PSI
- Set time:** 4-6 hours
- Cure time:** 15-24 hours
- Cure color:** Dark Grey

Part No	Colour Dry	Barcode	List
JBW50165UK	Dark Grey	043425501653	£6.24

- Great for:**
- All metals
  - Stone/Concrete
  - Fiberglass

- Top Attributes:**
- J-B Weld's strongest epoxy

- Good for:**
- Rigid plastic
  - Wood
  - Ceramic

- Primary Applications:**
- High-strength bonding metal-to-metal, and metal-to-other substrate application



## HighHeat® 25ml

HighHeat is a heat-resistant epoxy adhesive for bonding and gap-filling substrates exposed to high temperatures.

- Strength:** 4730 PSI
- Set time:** 1 hour
- Cure time:** 24 hrs (room temp) 1 hr (with heat)
- Cure color:** Dark Grey

Part No	Size	Barcode	List
JBW50197UK	25ml	043425501974	£6.66

- Great for:**
- Metal
  - Stone/Concrete

- Top Attributes:**
- 550°F heat resistance
  - Fuel resistant
  - Cures in an hour with heat

- Good for:**
- Fiberglass

- Primary Applications:**
- Bonding and gap-filling on mufflers, tailpipes, radiators, and other automotive or high-heat repairs.

# PUTTY STICKS PRODUCT GUIDE

J-B Weld Putty Sticks put a lot of strength and versatility right in your hands. Simply mix the putty by hand until the two components are a uniform color. Then mold, shape or fill the putty into a crack, gap or hole. Once cured, the putty can be sanded, drilled, tapped and painted.

- HAND MIXABLE EPOXY PUTTY
- MOLDS TO FIT & SHAPE ANYWHERE
- SEALS & FILLS TO REPAIR CRACKS & HOLES

To see our Putty Sticks in action.



PUTTY STICKS	Product Attributes						Metals				Plastics			Other Materials			
	Strength	Set Time	Cure Time	Dry Color	Max Temp	Fuel Resistance	Aluminum	Copper	Iron	Steel	PVC	ABS	Flexible Plastic*	Wood	Stone/Concrete	Fiberglass	Ceramic
SteelStik JBW8267UK	4000 PSI	5 min	1 hour	Grey	350 °F	Best	Best	Best	Best	Good	Good		Good	Best	Better	Good	
WaterWeld JBW8277UK	1300 PSI	25 min	1 hour	White	200 °F	Good	Better	Better	Better	Best	Best		Better	Better	Best	Better	
KwikWood JBW8257UK	2450 PSI	15-25 min	1 hour	Tan			Good	Good	Good	Good	Good		Best	Good	Good	Good	
PlasticWeld JBW8237UK	700 PSI	25 min	3 hours	White	200 °F		Good	Good	Good	Better	Better	Best	Better	Good	Good	Good	
HighHeat JBW8297UK	800 PSI	1 hour	8 hours	Grey	500 °F	Better	Better	Better	Better	Good	Good		Better	Better	Best		

\*Not polypropylene or polyethylene

## SteelStik 57g

SteelStik is a hand-mixable epoxy putty that fills gaps, seals cracks, and provides structural repair on steel and other metal surfaces.

- Strength:** 4000 PSI
- Set time:** 5 min
- Cure time:** 1 hour
- Cure color:** Grey



Part No	Size	Barcode	List
JBW8267UK	57g	043425700070	£5.83

- Great for:**
- All metals
  - Stone/Concrete

- Top Attributes:**
- Waterproof up to 500 PSI
  - Fuel resistant
  - Fast 5 minute set time

- Good for:**
- Fiberglass
  - Rigid plastics

- Primary Applications:**
- Gap-filling, sealing, and structural repairs on plumbing, auto, home and other metal applications.



## PlasticWeld 57g

PlasticWeld is a hand-mixable epoxy putty that fills gaps, seals cracks and provides structural repair on most plastics.

- Strength:** 700 PSI
- Set time:** 25 min
- Cure time:** 3 hours
- Cure color:** White

- Great for:**
- Most flexible or rigid plastics\*
- \*Not polypropylene or polyethylene

- Top Attributes:**
- Good bond strength to most plastics
  - Sandable & paintable

- Good for:**
- Fiberglass
  - Ceramic
  - Metal

- Primary Applications:**
- Gap-filling and sealing on most plastic surfaces.

Part No	Size	Barcode	List
JBW8237UK	57g	043425700063	£6.24



## WaterWeld 57g

WaterWeld is a waterproof, hand-mixable epoxy putty that seals cracks and repairs pipes and other surfaces exposed to water.

- Strength:** 1300 PSI
- Set time:** 25 min
- Cure time:** 1 hour
- Cure color:** White



Part No	Size	Barcode	List
JBW8277UK	57g	043425700087	£5.83

- Great for:**
- Rigid plastic
  - Fiberglass

- Top Attributes:**
- Waterproof up to 500 PSI
  - Cures underwater

- Good for:**
- All metals
  - Stone/Concrete

- Primary Applications:**
- Sealing and structural repairs on plumbing, marine, pool, bath/shower, and other applications.

## HighHeat 57g

HighHeat is a heat-resistant, hand-mixable epoxy putty that fills gaps and seals cracks on high-temperature surfaces.

- Strength:** 800 PSI (600 PSI at 400°F)
- Set time:** 1 hour
- Cure time:** 8 hours
- Cure color:** Grey

- Great for:**
- Metal
  - Stone/Concrete

- Top Attributes:**
- 500°F heat resistance
  - Fuel resistant

- Good for:**
- Fiberglass
  - Ceramic

- Primary Applications:**
- Gap-filling and structural repair on mufflers, tailpipes, and other automotive or high-heat repairs.

Part No	Size	Barcode	List
JBW8297UK	57g	043425700094	£6.24



## KwikWood 57g

KwikWood is a hand-mixable epoxy putty for easy wood repair, filling, and sealing.

- Strength:** 2450 PSI
- Set time:** 15-25 min
- Cure time:** 1 hour
- Cure color:** Tan

- Great for:**
- Wood gap-filling
  - Sealing
  - Rebuilding

- Top Attributes:**
- Easy to sand
  - Paintable in 1 hour
  - Won't shrink or sag

- Good for:**
- Wood bonding

- Primary Applications:**
- Filling holes and other damage in wood due to rot, insects, or other factors.


Part No	Size	Barcode	List
JBW8257UK	57g	043425082572	£6.24



CUT



KNEAD

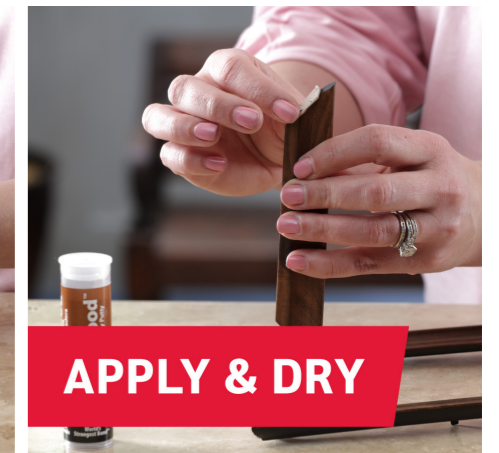

APPLY & DRY

# THREADLOCKERS PRODUCT GUIDE

J-B Weld Threadlockers provide a reliable and superior lock and seal for threaded fasteners on all mechanical parts, body assemblies, and hundreds of other applications to prevent loosening of fasteners from shock and vibration.

- WORKS ON SCREWS, BOLTS, AND MORE, BETWEEN 1/4" AND 1" LONG
- NO SPILLS, DRIPS OR CLOGS
- HEAT RESISTANT UP TO 300°F

THREADLOCKERS	Size	Application
PermaLock Medium Strength Blue JBW24206UK	6 ml	Adhesive that locks and seals threaded fasteners, but allows for easy hand-disassembly
PermaLock High Strength Red JBW27106UK	6 ml	Adhesive that locks and seals threaded fasteners that require resistance to severe shock and vibrations



## Perma-Lock Medium Strength Blue 6ml

- Applications:**
- Adhesive that locks and seals threaded fasteners, but allows for easy hand-disassembly.
  - Temperature resistant up to 149 °C

Part No	Size	Barcode	List
JBW24206UK	6ml	043425242068	£4.16



## Perma-Lock High Strength Red 6ml

- Applications:**
- High-strength adhesive that permanently locks and seals threaded fasteners. High resistance to severe shock and vibrations. Requires special tools for disassembly.
  - Temperature resistant up to 149 °C

Part No	Size	Barcode	List
JBW27106UK	6ml	043425271068	£4.16



# SPECIALTY PRODUCT GUIDE

J-B Weld Extreme Heat and FiberWeld repair wraps provide high strength and quick-curing repairs for structural re-inforcement.

- HIGH STRENGTH
- SPECIALLY FORMULATED
- FAST ACTING

To see our Repair Casts in action.



SPECIALTY	Product Attributes			Top benefits
	ExtremeHeat JBW37901UK	Size 85.2g	Strength 1000 PSI	Set Time 20 min with heat
FiberWeld 2.5cm Pipe Repair Cast JBW38248UK	Length 2" x 48"	Cure Color White		Fiberglass wrap for plumbing pipes up to 1" diameter



## ExtremeHeat 85.2g

ExtremeHeat is a steel-reinforced paste formulated to seal cracks on metal in high-temperature environments.

- Temp resistance:** 1000°F (538°C)  
**Set time:** 1 hour  
**Cure time:** 24 hours

Part No	Size	Barcode	List
JBW37901UK	85.2g	043425700285	£8.33

- Use on:**
- Any part of exhaust pipe
- Good for:**
- Sealing cracks
- Top Attributes:**
- 1000°F heat resistance
  - Fuel resistant
- Primary Applications:**
- Gap-filling and structural repair on duct work, heat exchange units and other high-heat repairs.



## FiberWeld 2.5cm Pipe Repair Cast 2.5cm x 122cm

FiberWeld 2.5cm Pipe Repair Cast is a high-strength fiberglass wrap, permeated with a specially-formulated resin to repair and seal pipes up to 2.5cm in diameter.

- Set time:** 15 min  
**Cure time:** 1 hour

Part No	Size	Barcode	List
JBW38248UK	2.5 x 122cm	043425382481	£13.33

- Great for:**
- PVC
  - Copper
  - Steel
- Top Attributes:**
- Works like a cast – just wet and wrap
  - Holds water pressure up to 500 PSI
  - Anti-corrosive
  - Quick curing
  - Can be sanded and painted

- Good for:**
- Cast iron
  - ABS
- Primary Applications:**
- Repair and reinforcement for pipes up to 2.5cm diameter.



**THE WRAP THAT HARDENS LIKE STEEL**

# **BRANCH DETAILS**

CLECKHEATON, WEST YORKSHIRE

Tel: 0344 463 6020

Email: [cleckheaton.sales@toolbank.com](mailto:cleckheaton.sales@toolbank.com)

---

HALESOWEN, WEST MIDLANDS

Tel: 0344 463 6050

Email: [halesowen.sales@toolbank.com](mailto:halesowen.sales@toolbank.com)

---

CWMBRAN, GWENT

Tel: 0344 463 6060

Email: [cwmbran.sales@toolbank.com](mailto:cwmbran.sales@toolbank.com)

---

HATFIELD, HERTFORDSHIRE

Tel: 0344 463 6035

Email: [hatfield.sales@toolbank.com](mailto:hatfield.sales@toolbank.com)

---

DARTFORD, KENT

Tel: 0344 463 6001

Email: [dartford.sales@toolbank.com](mailto:dartford.sales@toolbank.com)

---

NEWCASTLE, TYNE & WEAR

Tel: 0344 463 6085

Email: [newcastle.sales@toolbank.com](mailto:newcastle.sales@toolbank.com)

---

DUBLIN, IRELAND

Tel: 1-467-7000

Email: [dublin.sales@toolbank.com](mailto:dublin.sales@toolbank.com)

---

NORWICH, NORFOLK

Tel: 0344 463 6010

Email: [norwich.sales@toolbank.com](mailto:norwich.sales@toolbank.com)

---

EXETER, DEVON

Tel: 0344 463 6080

Email: [exeter.sales@toolbank.com](mailto:exeter.sales@toolbank.com)

---

SOUTHAMPTON, HAMPSHIRE

Tel: 0344 463 6070

Email: [southampton.sales@toolbank.com](mailto:southampton.sales@toolbank.com)

---

HILLINGTON PARK, GLASGOW

Tel: 0344 463 6040

Email: [glasgow.sales@toolbank.com](mailto:glasgow.sales@toolbank.com)

WIDNES, CHESHIRE

Tel: 0344 463 6025

Email: [widnes.sales@toolbank.com](mailto:widnes.sales@toolbank.com)